



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

(C-GIST)

Machine Id

[C-GIST] CESSNA 172 L-28663-51A

Component

Front Piston Aircraft Engine

Fluid

SHELL AEROSHELL W 15W50 MGR (8 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0743825	WC0743832	WC0858922
Sample Date		Client Info		17 May 2024	17 Apr 2024	08 Mar 2024
TSN	hrs	Client Info		0	0	0
TSO	hrs	Client Info		4002	3952	3902
Oil Age	hrs	Client Info		50	50	52
Filter Age	hrs	Client Info		50	50	52
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	11	16	13
Chromium	ppm	ASTM D5185(m)	>20	<1	2	1
Nickel	ppm	ASTM D5185(m)	>15	<1	<1	1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	3	3	3
Lead	ppm	ASTM D5185(m)	>20000	3786	3841	4277
Copper	ppm	ASTM D5185(m)	>25	7	6	7
Tin	ppm	ASTM D5185(m)	>30	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>15	8	5	5
Potassium	ppm	ASTM D5185(m)	>20	0	0	<1
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Silt	scalar	Visual*	NONE	VLITE	VLITE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	<1	<1
Boron	ppm	ASTM D5185(m)		<1	<1	0
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)	5	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	10	<1	2	<1
Calcium	ppm	ASTM D5185(m)	10	<1	2	<1
Phosphorus	ppm	ASTM D5185(m)	1280	1106	1138	1207
Zinc	ppm	ASTM D5185(m)	10	4	5	4
Sulfur	ppm	ASTM D5185(m)	1800	1395	1369	1650
Visc @ 100°C	cSt	ASTM D7279(m)	18.2	18.8	18.4	18.6

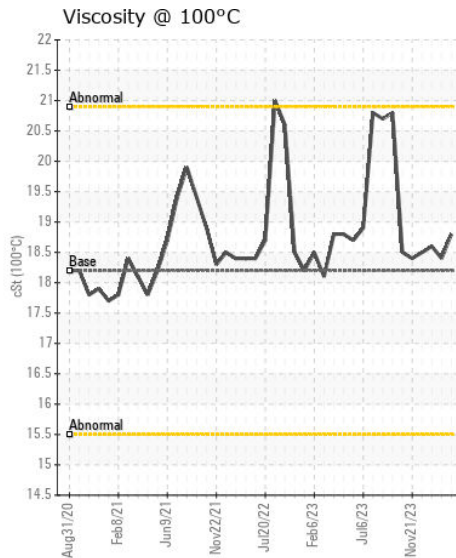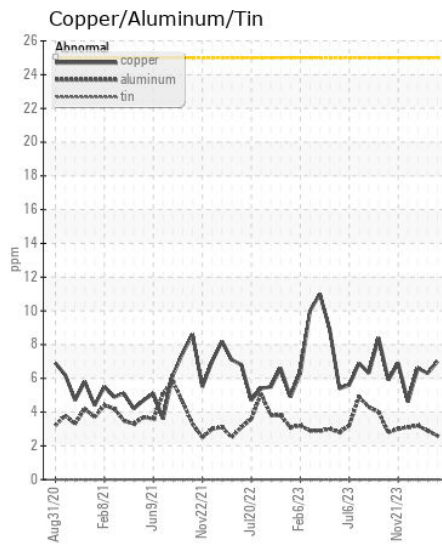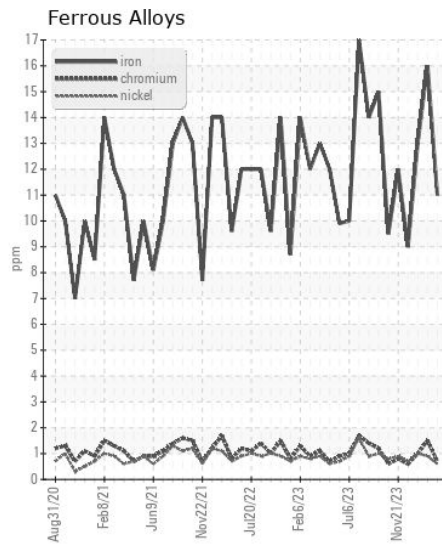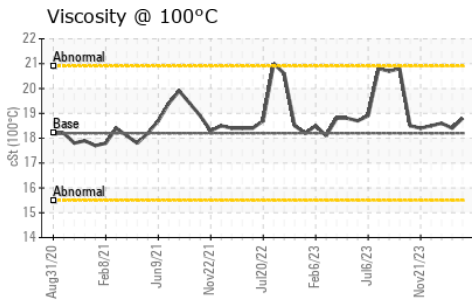

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0743825
Lab Number : 02637461
Unique Number : 5786623
Test Package : AVI 1
Received : 24 May 2024
Tested : 24 May 2024
Diagnosed : 24 May 2024 - Kevin Marson

CANADIAN FLIGHT ACADEMY
 1250 AIRPORT BOULEVARD
 OSHAWA, ON
 CA L1J 8P5
 Contact: John Bayes
 bayesjohn@torontoairways.com
 T: (905)404-9252
 F: (905)404-8294

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.