



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL



Machine Id
701112
Component
Diesel Engine
Fluid
CHEVRON DELO 400 SAE 10W30 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0119694	GFL0114926	GFL0103716
Sample Date		Client Info		23 May 2024	13 Mar 2024	01 Dec 2023
Machine Age	hrs	Client Info		11619	11257	186192
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>120	4	6	4
Chromium	ppm	ASTM D5185(m)	>20	0	<1	0
Nickel	ppm	ASTM D5185(m)	>5	0	<1	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	4	3
Lead	ppm	ASTM D5185(m)	>40	0	0	<1
Copper	ppm	ASTM D5185(m)	>330	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION

Il n'y a aucun indice de contamination dans l'huile.


Silicon	ppm	ASTM D5185(m)	>25	2	3	3
Potassium	ppm	ASTM D5185(m)	>20	3	9	6
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0	0.1	0.1
Nitration	Abs/cm	ASTM D7624*	>20	8.7	8.8	6.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.4	19.5	18.6
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION


La viscosité de l'échantillon se situe dans la portée de l'SAE 40; nous vous conseillons de vérifier. L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		7	7	6
Boron	ppm	ASTM D5185(m)		19	2	2
Barium	ppm	ASTM D5185(m)		0	0	<1
Molybdenum	ppm	ASTM D5185(m)		47	57	55
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		614	945	897
Calcium	ppm	ASTM D5185(m)		1412	1071	1009
Phosphorus	ppm	ASTM D5185(m)	1260	759	978	932
Zinc	ppm	ASTM D5185(m)	1400	903	1148	1117
Sulfur	ppm	ASTM D5185(m)		1953	2572	2486
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.8	15.8	14.4
Visc @ 100°C	cSt	ASTM D7279(m)	11.1	▲ 13.6	11.2	11.7


▲ Viscosity @ 100°C

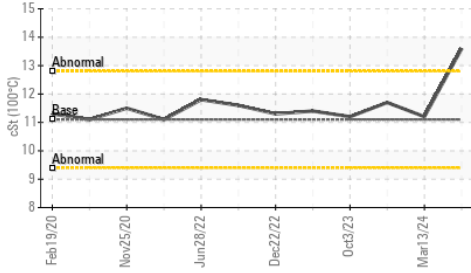


FT-IR (Direct Trend)

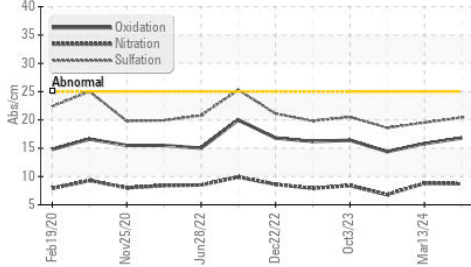


Iron (ppm)

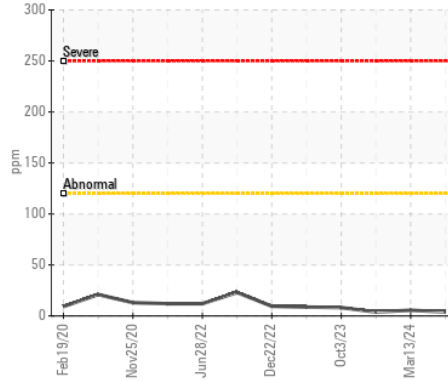


Lead (ppm)

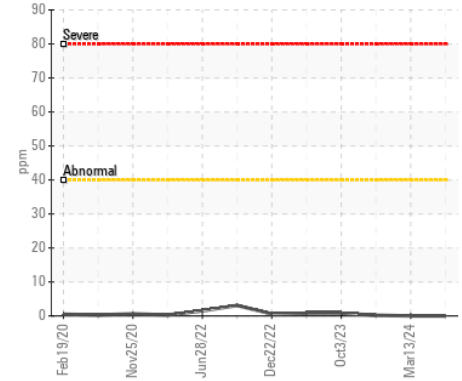


Aluminum (ppm)

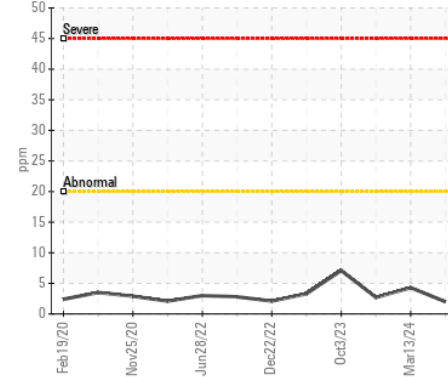


Chromium (ppm)

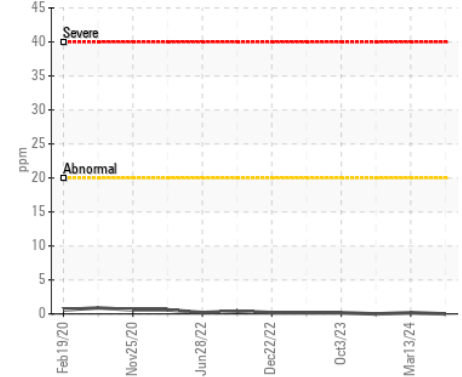


Copper (ppm)

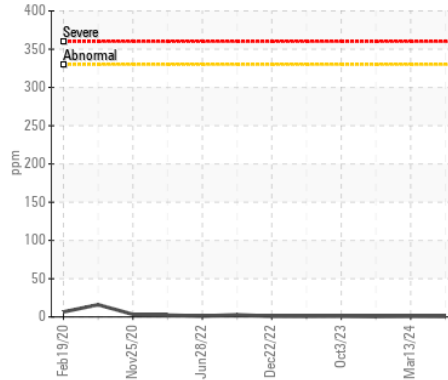


Silicon (ppm)

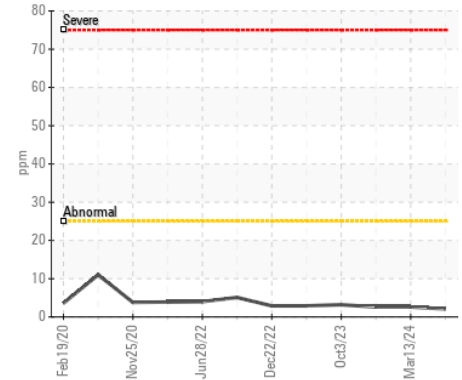

▲ Viscosity @ 100°C

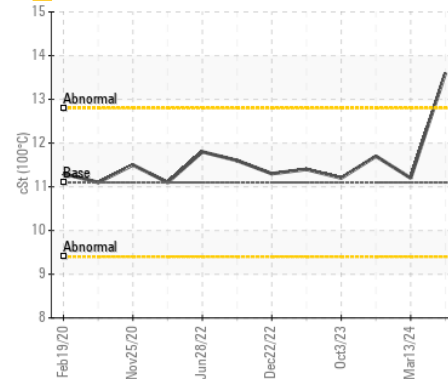

Soot %

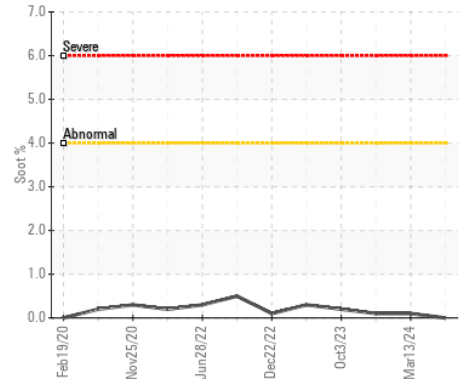

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0119694
Lab Number : 02637899
Unique Number : 5787061
Test Package : MOB 1

GFL Environmental - 780 - GMA - ICI - Solid Waste
 4365 boul. St-Elzear Ouest,
 Laval, QC
 CA H7P 4J3
 Contact: Pieces Laval
 pieces.laval@gflenv.com
 T: (450)687-3838
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.