



Machine Id
733013
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indique que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

WEAR

Les taux d'usure de tous les composants sont normaux.










CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0047471	GFL0084450	---
Sample Date		Client Info		22 Apr 2024	20 Sep 2023	---
Machine Age	kms	Client Info		13978	4039	---
Oil Age	kms	Client Info		0	0	---
Filter Age	kms	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Not Changed	---
Filter Changed		Client Info		Not Changed	Changed	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185(m)	>220	50	34	---
Chromium	ppm	ASTM D5185(m)	>2	0	0	---
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>5	0	<1	---
Aluminum	ppm	ASTM D5185(m)	>75	18	7	---
Lead	ppm	ASTM D5185(m)	>95	16	2	---
Copper	ppm	ASTM D5185(m)	>60	14	6	---
Tin	ppm	ASTM D5185(m)	>10	3	1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185(m)	>25	4	5	---
Potassium	ppm	ASTM D5185(m)	>20	3	3	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---
Sodium	ppm	ASTM D5185(m)		10	4	---
Boron	ppm	ASTM D5185(m)		51	55	---
Barium	ppm	ASTM D5185(m)		<1	<1	---
Molybdenum	ppm	ASTM D5185(m)		0	0	---
Manganese	ppm	ASTM D5185(m)		1	<1	---
Magnesium	ppm	ASTM D5185(m)		1	<1	---
Calcium	ppm	ASTM D5185(m)		123	125	---
Phosphorus	ppm	ASTM D5185(m)		203	205	---
Zinc	ppm	ASTM D5185(m)		15	12	---
Sulfur	ppm	ASTM D5185(m)		1425	1474	---
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	33.0	33.4	---

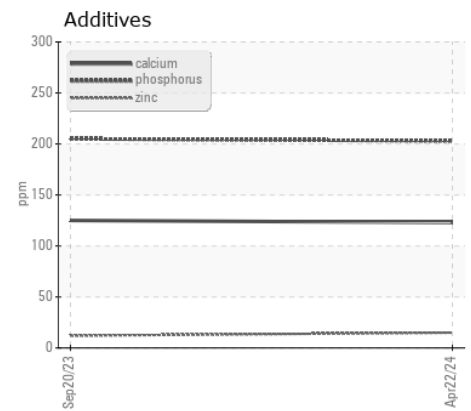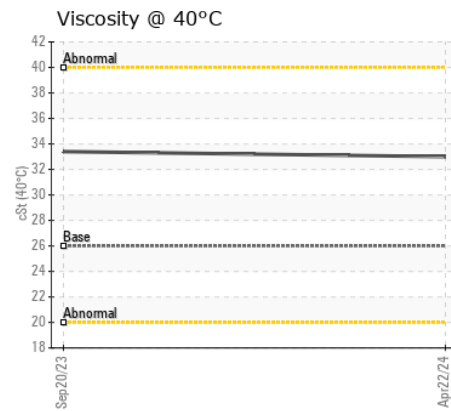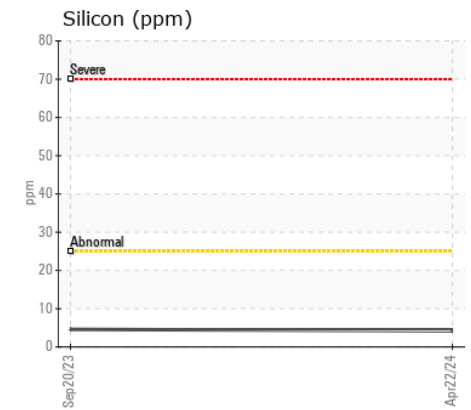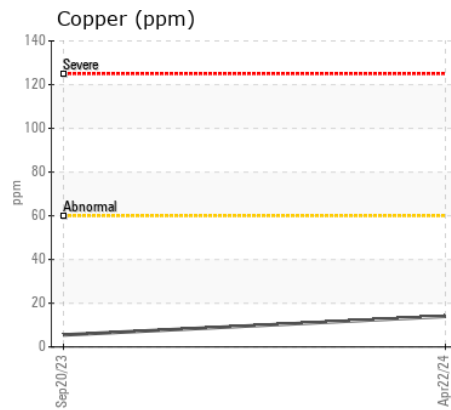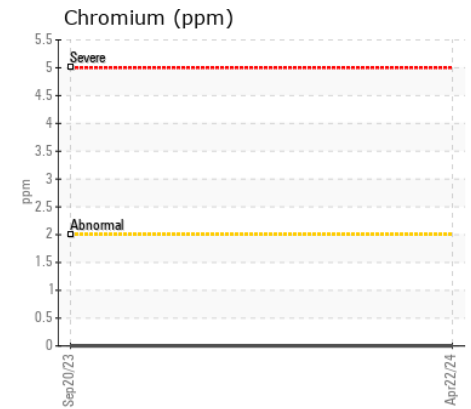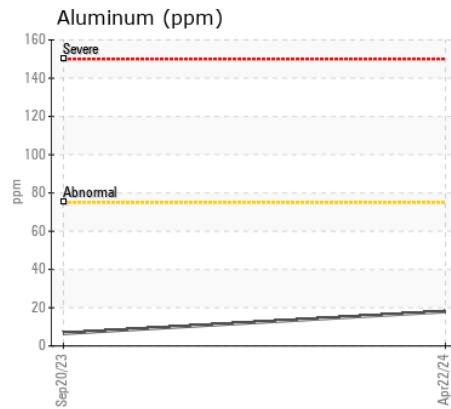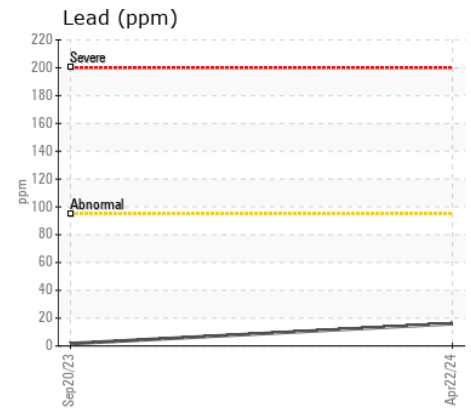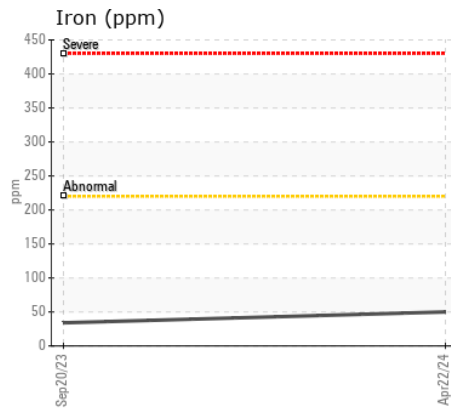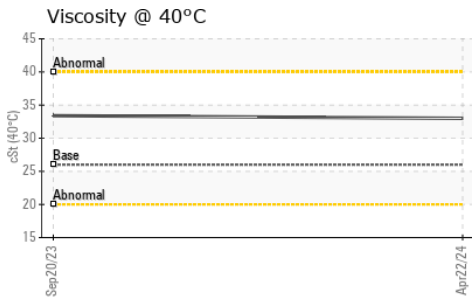

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0047471
Lab Number : 02638154
Unique Number : 5787316
Test Package : MOB 1
Received : 28 May 2024
Tested : 29 May 2024
Diagnosed : 29 May 2024 - Wes Davis

GFL Environmental - 780 - GMA - ICI - Solid Waste
 4365 boul. St-Elzear Ouest,
 Laval, QC
 CA H7P 4J3
 Contact: Louis Michaud
 louis.michaud@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: