



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
GFL218
Machine Id
833037
Component
Natural Gas Engine
Fluid
NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0124663	GFL0101093	---
Sample Date		Client Info		03 Jun 2024	13 Nov 2023	---
Machine Age	hrs	Client Info		13347	5020	---
Oil Age	hrs	Client Info		5020	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>50	10	31	---
Chromium	ppm	ASTM D5185(m)	>4	0	<1	---
Nickel	ppm	ASTM D5185(m)	>2	0	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>3	0	<1	---
Aluminum	ppm	ASTM D5185(m)	>9	1	4	---
Lead	ppm	ASTM D5185(m)	>30	0	1	---
Copper	ppm	ASTM D5185(m)	>35	1	16	---
Tin	ppm	ASTM D5185(m)	>4	0	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>+100	3	32	---
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Soot %	%	ASTM D7844*		0	0	---
Nitration	Abs/cm	ASTM D7624*	>20	11.0	8.2	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.0	22.1	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		7	3	---
Boron	ppm	ASTM D5185(m)		9	15	---
Barium	ppm	ASTM D5185(m)		0	2	---
Molybdenum	ppm	ASTM D5185(m)		51	97	---
Manganese	ppm	ASTM D5185(m)		<1	12	---
Magnesium	ppm	ASTM D5185(m)		543	607	---
Calcium	ppm	ASTM D5185(m)		1553	1166	---
Phosphorus	ppm	ASTM D5185(m)		635	595	---
Zinc	ppm	ASTM D5185(m)		879	686	---
Sulfur	ppm	ASTM D5185(m)		1961	2159	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.3	15.9	---
Visc @ 100°C	cSt	ASTM D7279(m)		14.5	13.5	---

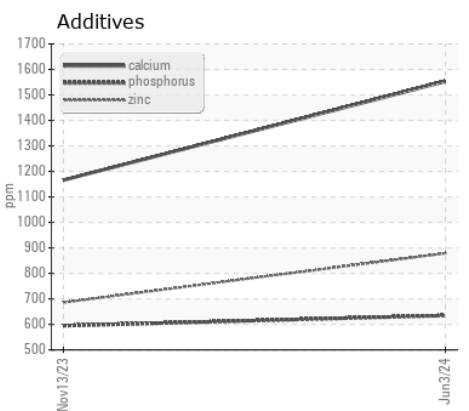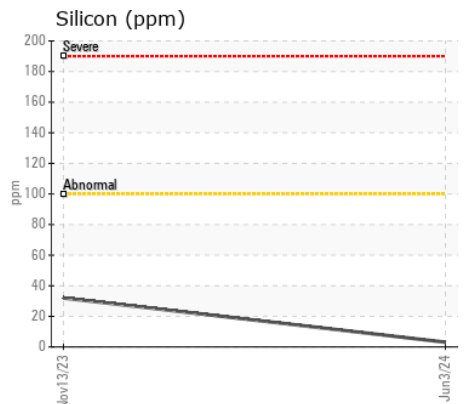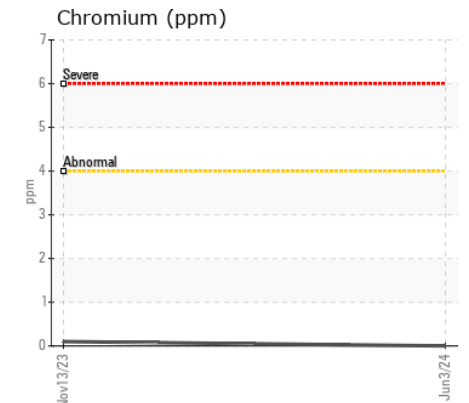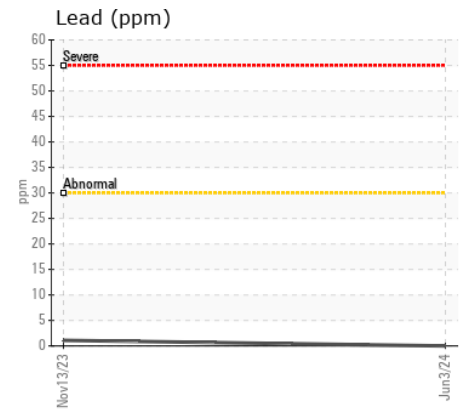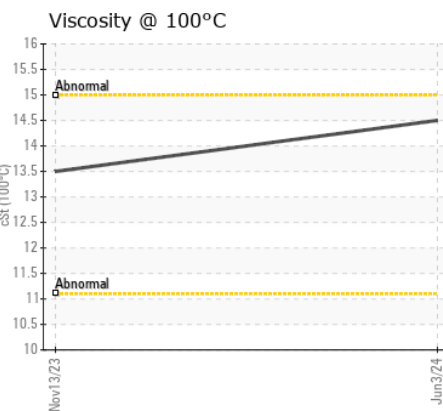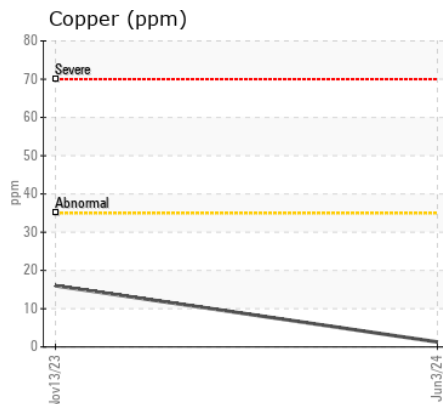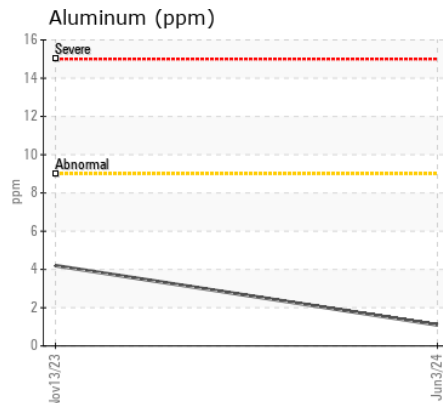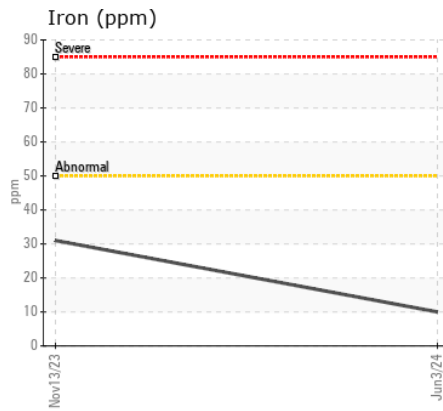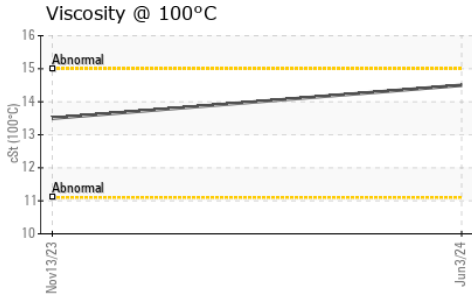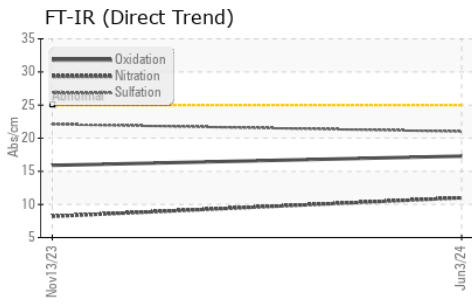

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0124663
Lab Number : 02640085
Unique Number : 5789247
Test Package : MOB 1
Received : 06 Jun 2024
Tested : 06 Jun 2024
Diagnosed : 06 Jun 2024 - Wes Davis

GFL Environmental - 225 - COT(D2)
 20 Brydon Drive
 Etobicoke, ON
 CA M9W 5R6
 Contact: Rick Philip
 rphilip@gflenv.com
 T: (416)745-8080
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.