



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[155221]
 Machine Id
44995470
 Component
Diesel Engine
 Fluid
VALVOLINE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CU0022808	---	---
Sample Date		Client Info		05 Jun 2024	---	---
Machine Age	hrs	Client Info		189	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>90	2	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>2	0	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	2	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>6	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	6.5	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.7	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	---	---
Boron	ppm	ASTM D5185(m)	39	43	---	---
Barium	ppm	ASTM D5185(m)	1	0	---	---
Molybdenum	ppm	ASTM D5185(m)	49	44	---	---
Manganese	ppm	ASTM D5185(m)	1	<1	---	---
Magnesium	ppm	ASTM D5185(m)	616	755	---	---
Calcium	ppm	ASTM D5185(m)	1554	1156	---	---
Phosphorus	ppm	ASTM D5185(m)	899	680	---	---
Zinc	ppm	ASTM D5185(m)	1069	797	---	---
Sulfur	ppm	ASTM D5185(m)	2624	1877	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.8	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	13.6	14.2	---	---

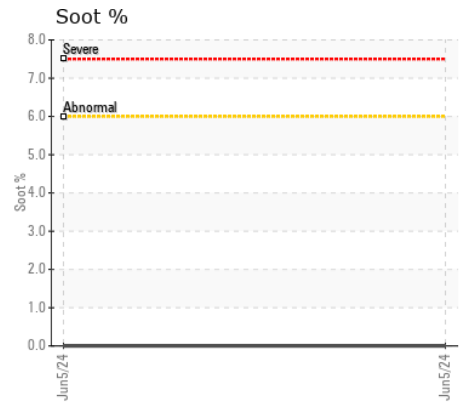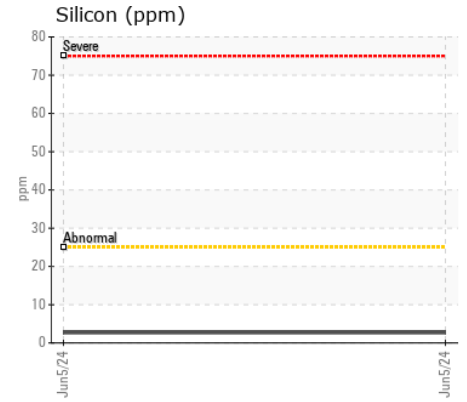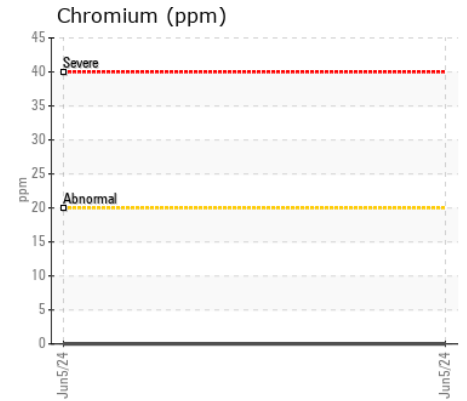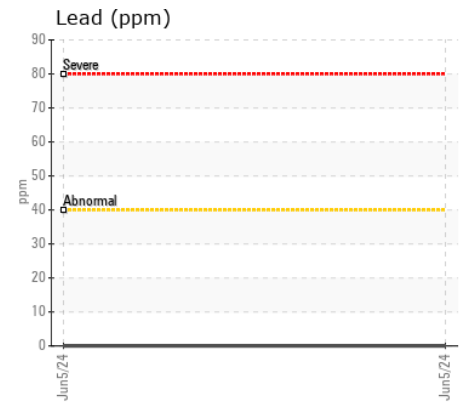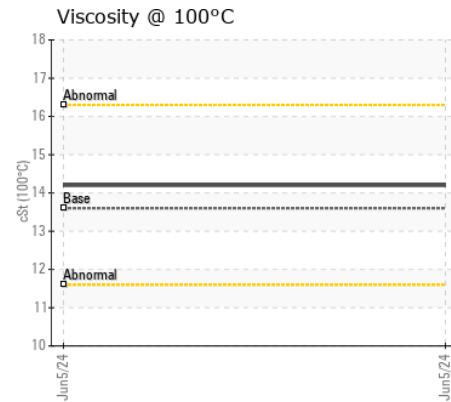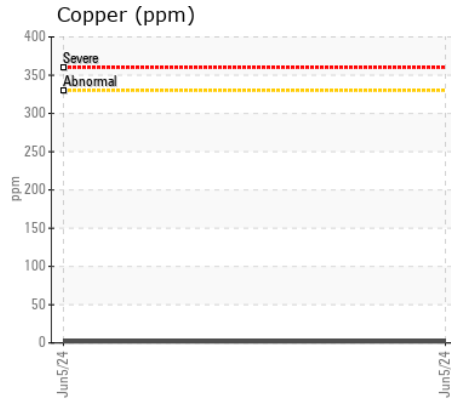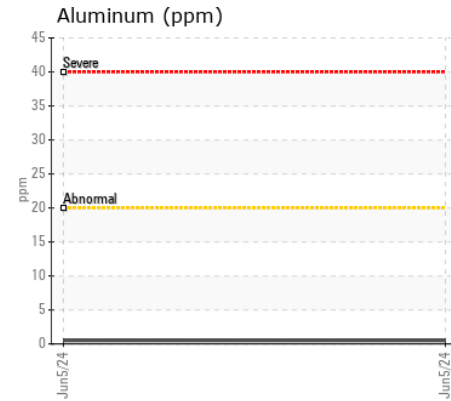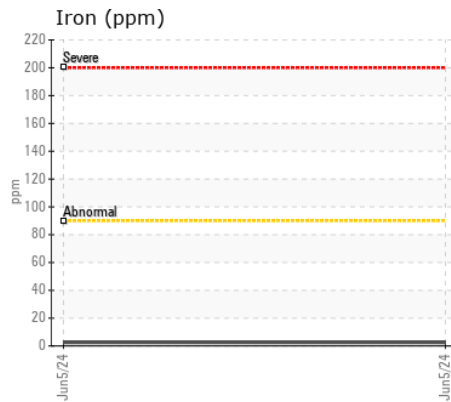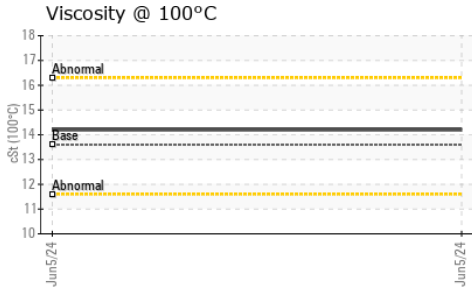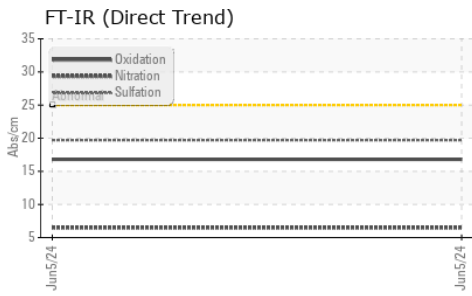

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : CU0022808 **Received** : 10 Jun 2024
Lab Number : 02640678 **Tested** : 10 Jun 2024
Unique Number : 5789840 **Diagnosed** : 10 Jun 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: Visual)

CN RAIL
 76 INTERMODAL DR
 BRAMPTON, ON
 CA L6T 5B3
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: