



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[86855]

Machine Id

1180 LAKESHORE RD W, MISS JACK DARLING REGION OF PEEL 37244316

Component

Right Diesel Engine

Fluid

ESSO XD-3 EXTRA 15W40 (140 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PN0006262	PN0002516	PN0001413
Sample Date		Client Info		06 Jun 2024	17 Jun 2021	18 Jun 2020
Machine Age	hrs	Client Info		293	241	216
Oil Age	hrs	Client Info		22	24	17
Filter Age	hrs	Client Info		22	24	17
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	<1	<1	1
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>4	0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	<1	2	1
Lead	ppm	ASTM D5185(m)	>40	0	<1	<1
Copper	ppm	ASTM D5185(m)	>330	<1	1	1
Tin	ppm	ASTM D5185(m)	>15	0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	<1	<1

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	9	10
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	4.5	7.5	8.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	17.2	17.7	23.0
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>192	1	2	2
Boron	ppm	ASTM D5185(m)		5	80	70
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		55	89	82
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)		910	35	64
Calcium	ppm	ASTM D5185(m)	3780	1070	2159	2180
Phosphorus	ppm	ASTM D5185(m)	1370	979	1113	1024
Zinc	ppm	ASTM D5185(m)	1500	1132	1213	1156
Sulfur	ppm	ASTM D5185(m)	3800	2575	3419	3216
Oxidation	Abs/.1mm	ASTM D7414*	>25	12.6	13.2	13.8
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.7	13.8	14.3

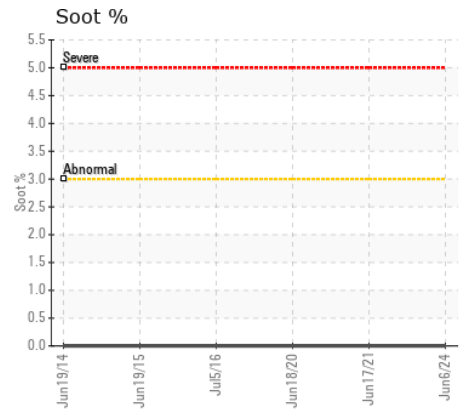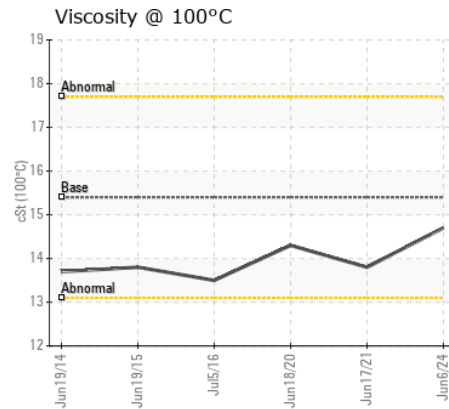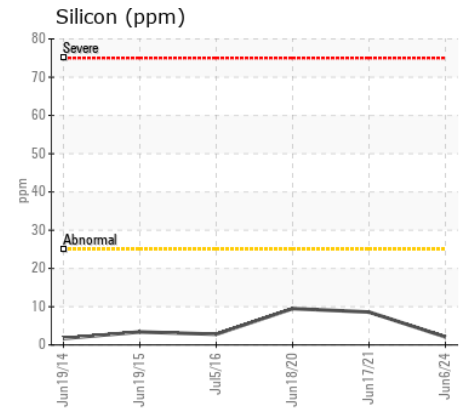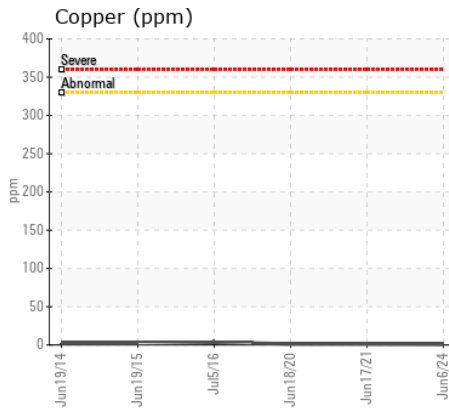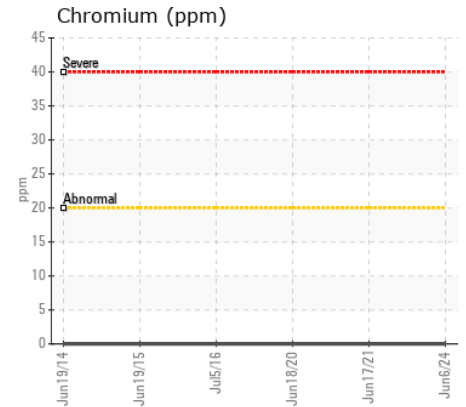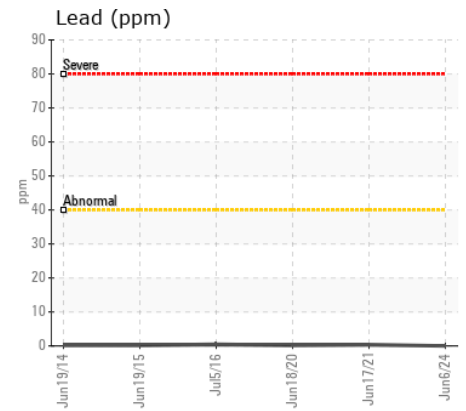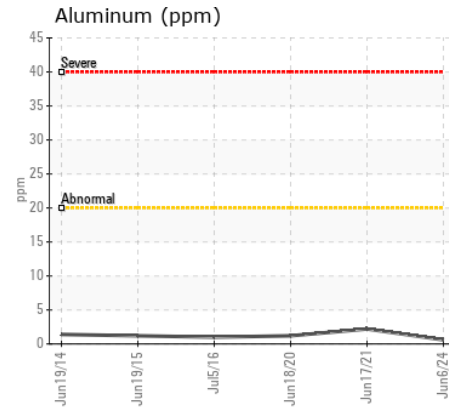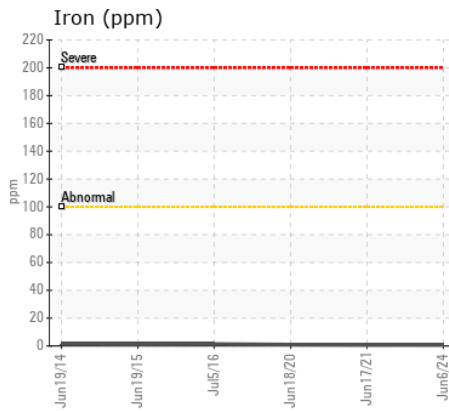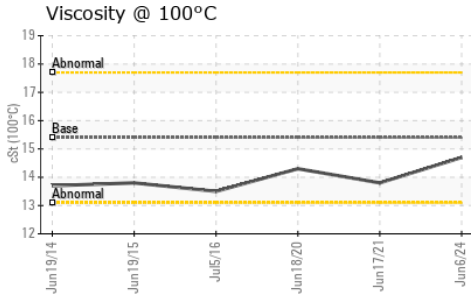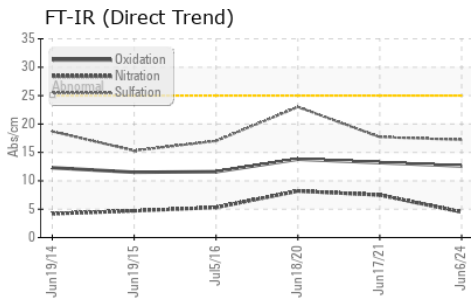

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PN0006262
Lab Number : 02641080
Unique Number : 5798619
Test Package : MOB 1
Received : 11 Jun 2024
Tested : 11 Jun 2024
Diagnosed : 11 Jun 2024 - Wes Davis

POWER STATION INC.
 1050 JAYSON COURT
 MISSISSAUGA, ON
 CA L4W 2V5
 Contact: Brett Kinkley
 Bkinkley@pwrstn.com
 T:
 F: (905)565-8544

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.