



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area
[407560]
 Machine Id
VOLVO L50H 4422434
 Component
Drop Box
 Fluid
VOLVO AT 102 (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
 Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.
 The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP394589	---	---
Sample Date		Client Info		07 Jun 2024	---	---
Machine Age	hrs	Client Info		363	---	---
Oil Age	hrs	Client Info		363	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				ATTENTION	---	---
Iron	ppm	ASTM D5185(m)	>500	40	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>10	0	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>30	<1	---	---
Lead	ppm	ASTM D5185(m)	>30	0	---	---
Copper	ppm	ASTM D5185(m)	>30	2	---	---
Tin	ppm	ASTM D5185(m)	>20	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>50	5	---	---
Potassium	ppm	ASTM D5185(m)	>20	7	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185(m)		6	---	---
Boron	ppm	ASTM D5185(m)	187	88	---	---
Barium	ppm	ASTM D5185(m)	0.0	19	---	---
Molybdenum	ppm	ASTM D5185(m)	0.0	1	---	---
Manganese	ppm	ASTM D5185(m)	0.0	2	---	---
Magnesium	ppm	ASTM D5185(m)	6.8	3	---	---
Calcium	ppm	ASTM D5185(m)	215	253	---	---
Phosphorus	ppm	ASTM D5185(m)	445	225	---	---
Zinc	ppm	ASTM D5185(m)	56	22	---	---
Sulfur	ppm	ASTM D5185(m)	1336	973	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	35.3	28.7	---	---

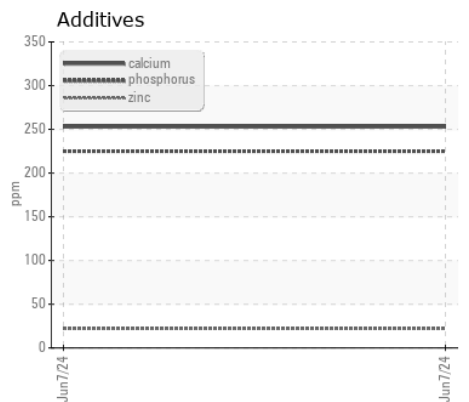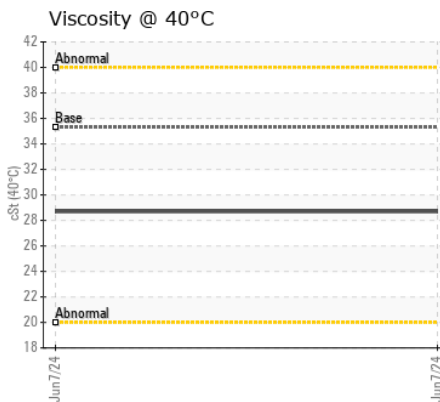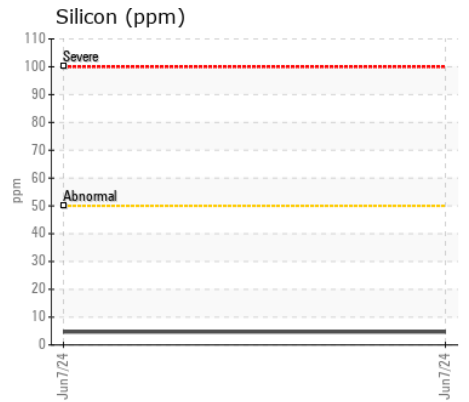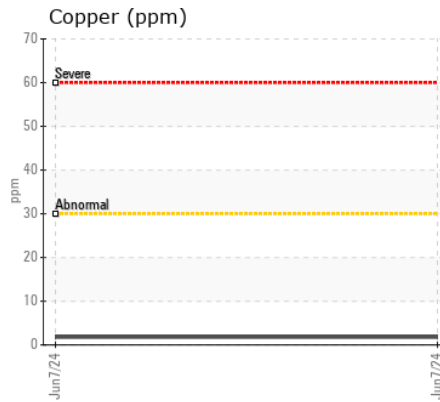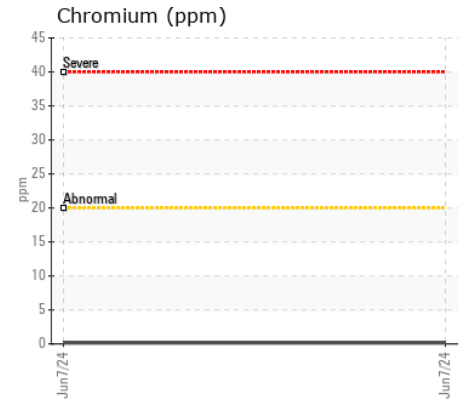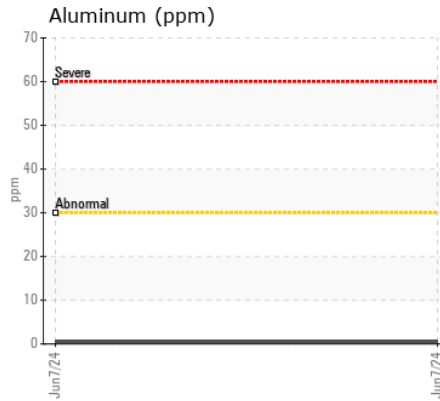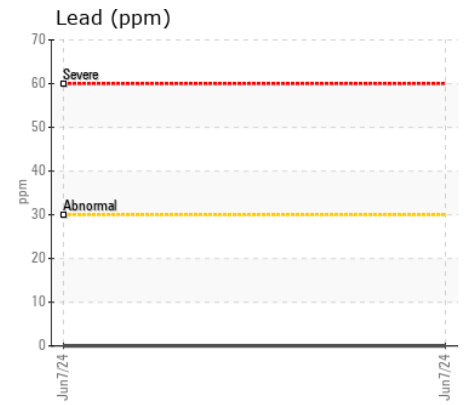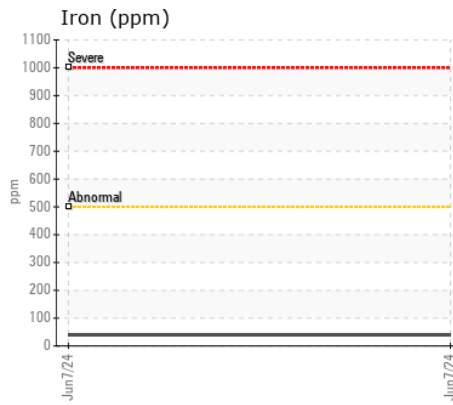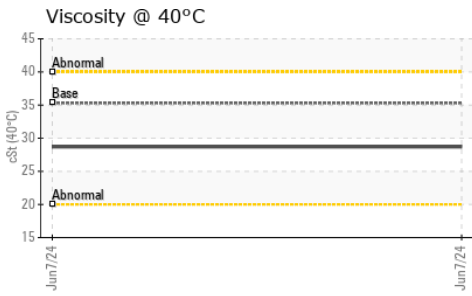

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP394589 **Received** : 12 Jun 2024
Lab Number : 02641523 **Tested** : 12 Jun 2024
Unique Number : 5799062 **Diagnosed** : 12 Jun 2024 - Kevin Marson
Test Package : MOB 1

STRONGCO EQUIP (AB)
 6 - 38403 BURNT LAKE TRAIL
 RED DEER COUNTY, AB
 CA T4S 2L4
 Contact: Perry Doyle
 pdoyle@strongco.com
 T: (403)391-3520
 F: (403)346-3487

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.