



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
{UNASSIGNED}

Machine Id
911039

Component
Transmission (Auto)

Fluid
PETRO CANADA DURADRIVE HD SYNTHETIC ATF (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0107592	GFL0087673	GFL0079487
Sample Date		Client Info		12 Jun 2024	26 Jul 2023	02 May 2023
Machine Age	kms	Client Info		146989	102226	90366
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	N/A	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>220	37	26	53
Chromium	ppm	ASTM D5185(m)	>2	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	0
Aluminum	ppm	ASTM D5185(m)	>75	9	5	13
Lead	ppm	ASTM D5185(m)	>95	9	11	40
Copper	ppm	ASTM D5185(m)	>60	28	15	37
Tin	ppm	ASTM D5185(m)	>10	1	1	3
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










Il n'y a aucun indice de contamination dans le fluide.

Silicon	ppm	ASTM D5185(m)	>25	3	4	4
Potassium	ppm	ASTM D5185(m)	>20	1	1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		6	6	5
Boron	ppm	ASTM D5185(m)		69	84	111
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	<1	<1
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)		3	2	<1
Calcium	ppm	ASTM D5185(m)		119	123	84
Phosphorus	ppm	ASTM D5185(m)		213	270	307
Zinc	ppm	ASTM D5185(m)		8	7	4
Sulfur	ppm	ASTM D5185(m)		1352	1481	1059
Visc @ 40°C	cSt	ASTM D7279(m)	36.1	32.9	33.8	35.7

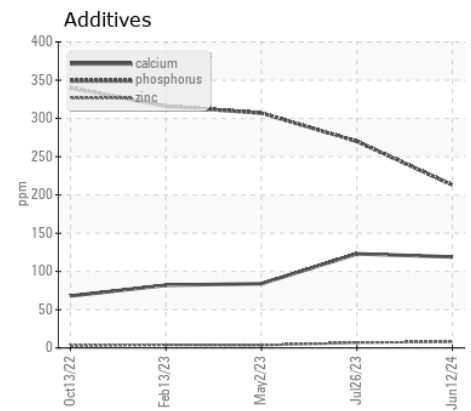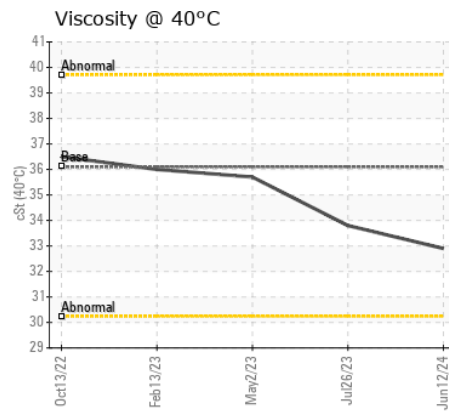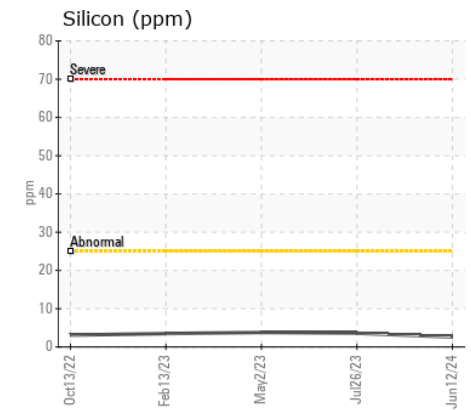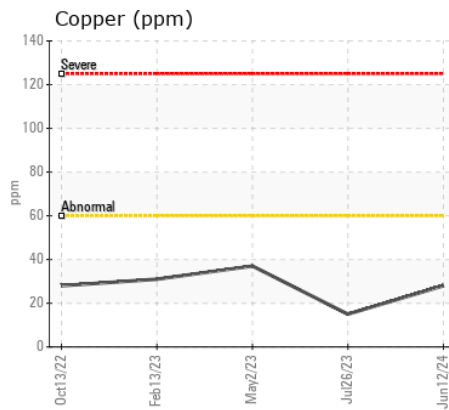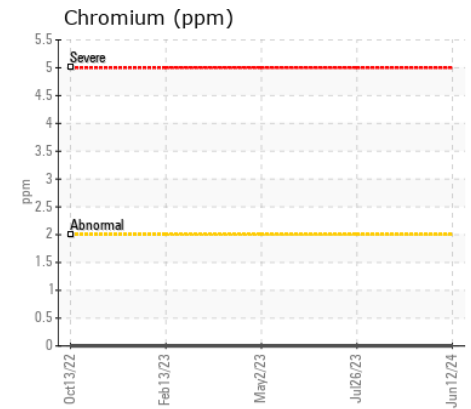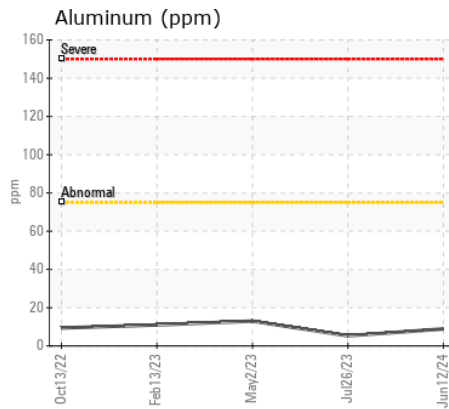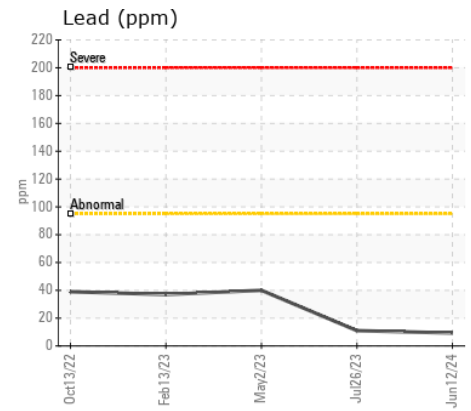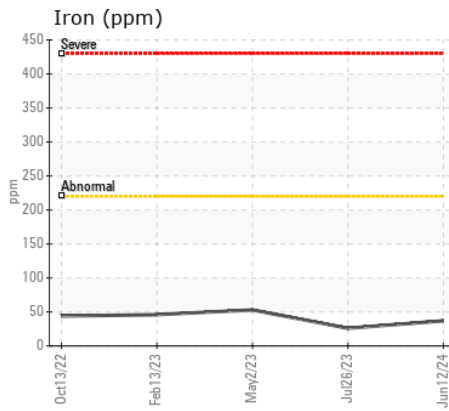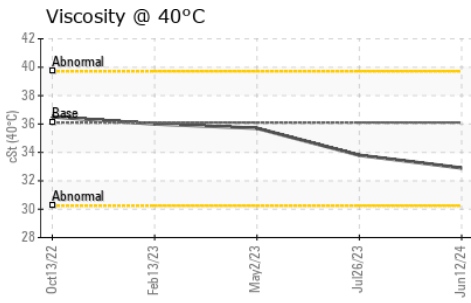

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0107592
Lab Number : 02643230
Unique Number : 5800769
Test Package : MOB 1
Received : 20 Jun 2024
Tested : 20 Jun 2024
Diagnosed : 20 Jun 2024 - Kevin Marson

GFL Environmental - 747 - GMA - Solid Waste
 4 Chemin du Tremblay,
 Boucherville, QC
 CA J4B 6Z5
 Contact: Steve Voyer
 svoyer@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: