



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
833055
 Component
Diesel Engine
 Fluid
NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0126611	GFL0120088	GFL0104523
Sample Date		Client Info		18 Jun 2024	07 May 2024	19 Dec 2023
Machine Age	kms	Client Info		17557	15685	10674
Oil Age	kms	Client Info		2080	10674	0
Filter Age	kms	Client Info		0	10674	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>80	6	11	8
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>30	1	2	2
Lead	ppm	ASTM D5185(m)	>30	0	0	0
Copper	ppm	ASTM D5185(m)	>150	<1	2	<1
Tin	ppm	ASTM D5185(m)	>5	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	2	3	3
Potassium	ppm	ASTM D5185(m)	>20	<1	1	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	9.2	10.8	7.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.5	21.7	19.0
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		6	7	6
Boron	ppm	ASTM D5185(m)		18	7	29
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		48	50	48
Manganese	ppm	ASTM D5185(m)		<1	<1	0
Magnesium	ppm	ASTM D5185(m)		536	561	576
Calcium	ppm	ASTM D5185(m)		1509	1541	1496
Phosphorus	ppm	ASTM D5185(m)		693	637	768
Zinc	ppm	ASTM D5185(m)		863	892	883
Sulfur	ppm	ASTM D5185(m)		1931	1974	2162
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.5	17.6	15.7
Visc @ 100°C	cSt	ASTM D7279(m)		14.5	14.4	14.5

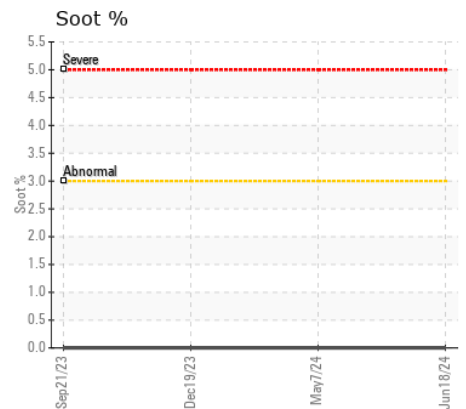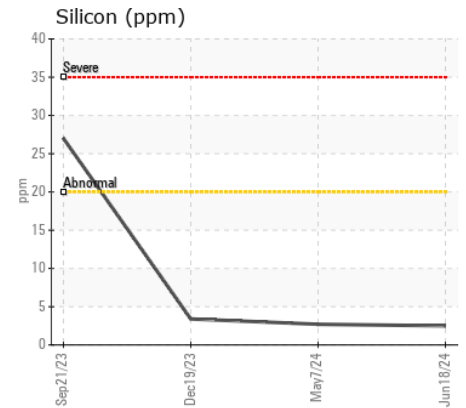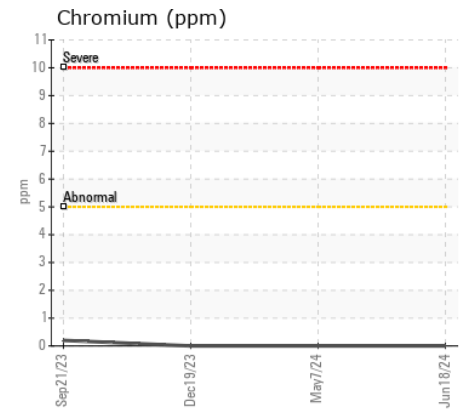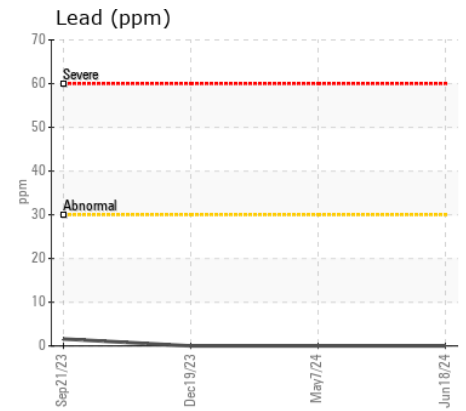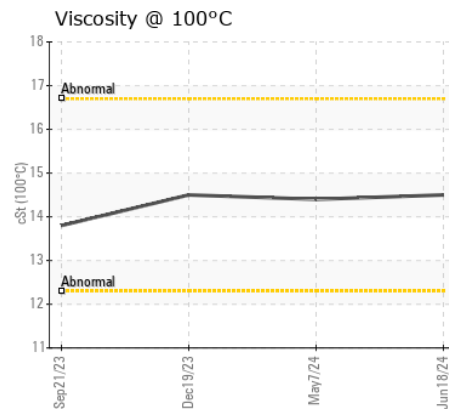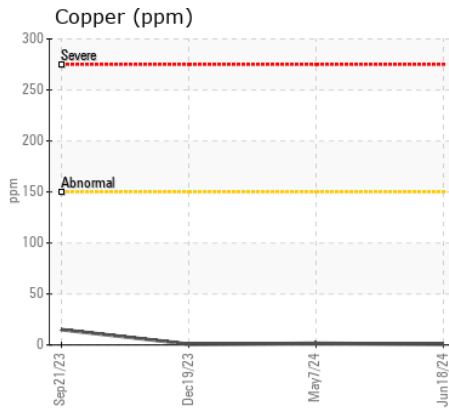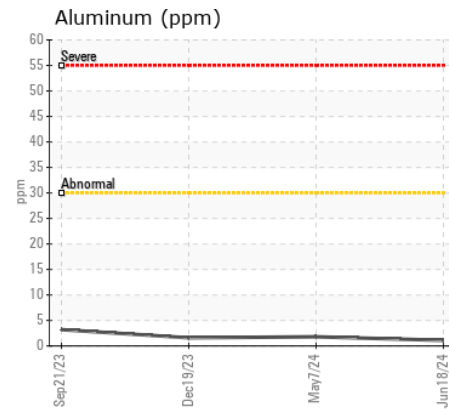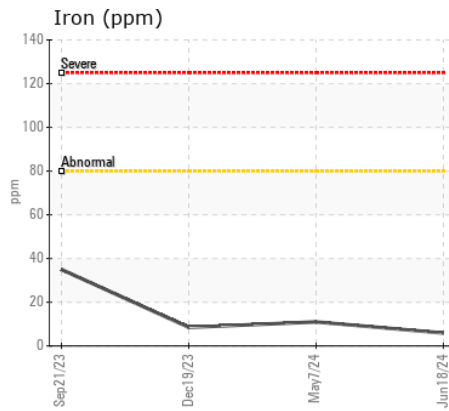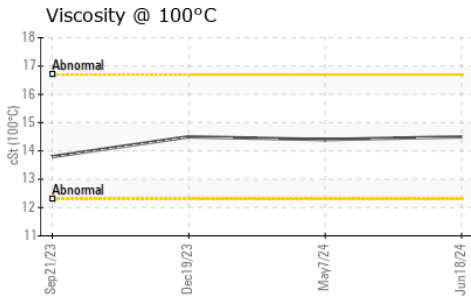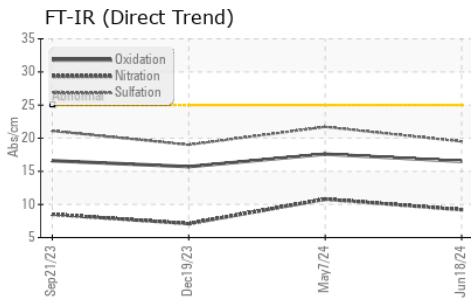

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0126611 **Received** : 21 Jun 2024
Lab Number : 02643357 **Tested** : 21 Jun 2024
Unique Number : 5800896 **Diagnosed** : 21 Jun 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: Visual)

GFL Environmental - 225 - COT(D2)
 20 Brydon Drive
 Etobicoke, ON
 CA M9W 5R6
 Contact: Kim McCall
 kmccall@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: