



Machine Id
910076
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (36 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0126249	GFL0097569	GFL0097566
Sample Date		Client Info		20 Jun 2024	31 Jan 2024	17 Nov 2023
Machine Age	hrs	Client Info		10833	9689	9141
Oil Age	hrs	Client Info		1191	9141	546
Filter Age	hrs	Client Info		1191	9141	546
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	15	8	9
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	0
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	1	2	<1
Lead	ppm	ASTM D5185(m)	>40	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>330	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	4	3	3
Potassium	ppm	ASTM D5185(m)	>20	1	2	0
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	1	0.4	0.4
Nitration	Abs/cm	ASTM D7624*	>20	9.5	7.5	7.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.8	19.5	19.4
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	3	4
Boron	ppm	ASTM D5185(m)	0	2	3	5
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	60	59	60
Manganese	ppm	ASTM D5185(m)	0	<1	0	0
Magnesium	ppm	ASTM D5185(m)	1010	957	965	969
Calcium	ppm	ASTM D5185(m)	1070	1024	1059	1086
Phosphorus	ppm	ASTM D5185(m)	1150	950	988	967
Zinc	ppm	ASTM D5185(m)	1270	1176	1159	1195
Sulfur	ppm	ASTM D5185(m)	2060	2271	2554	2343
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.0	14.7	14.1
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.7	13.7	13.8

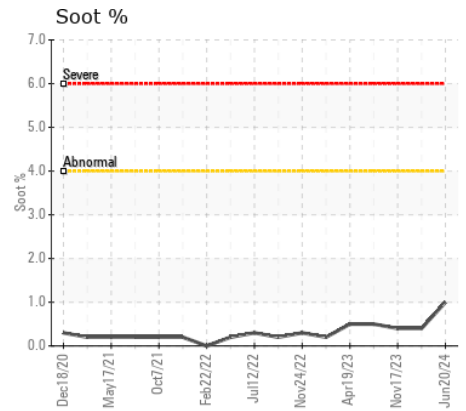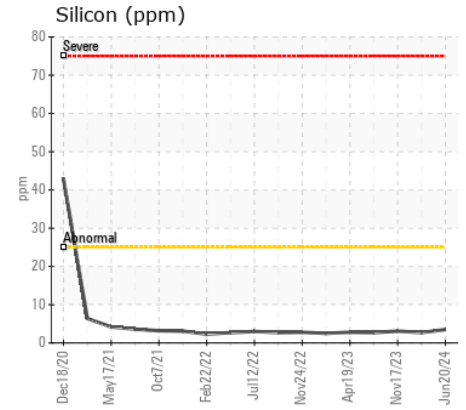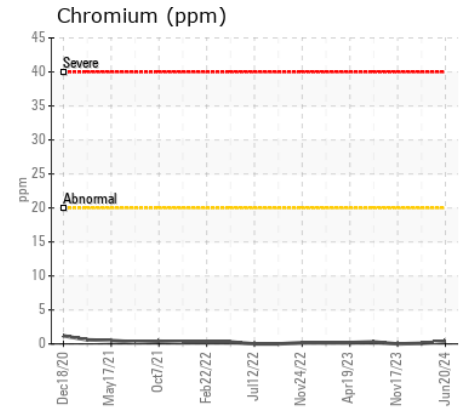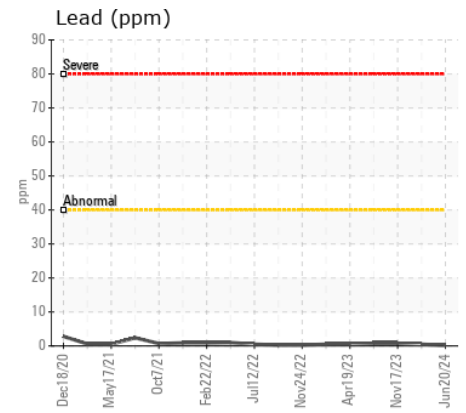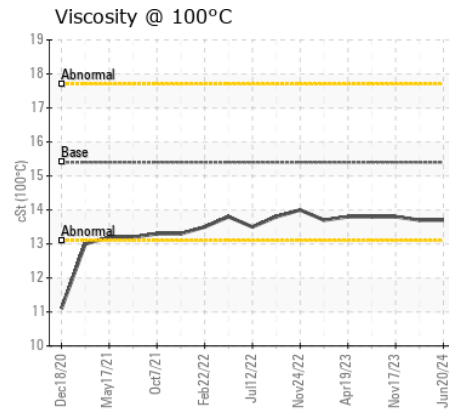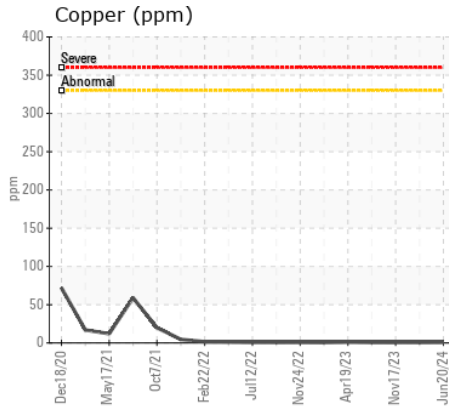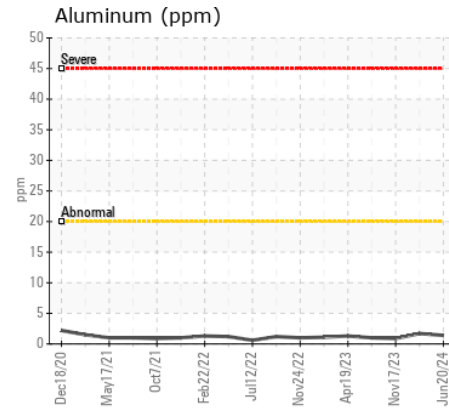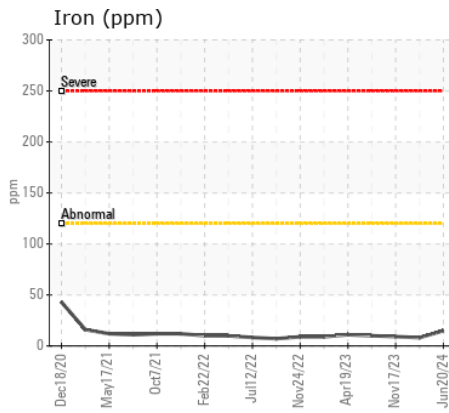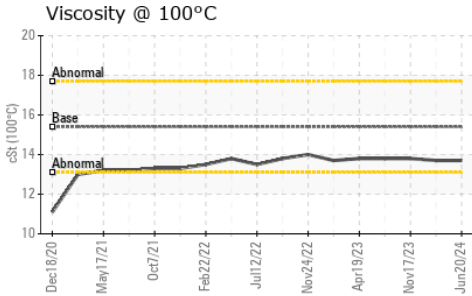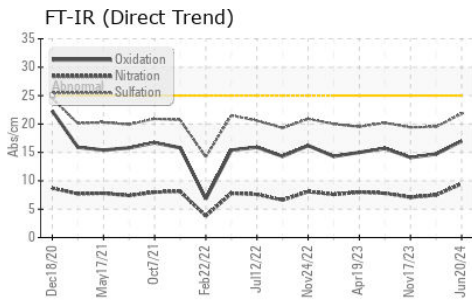

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0126249 **Received** : 24 Jun 2024
Lab Number : 02643677 **Tested** : 24 Jun 2024
Unique Number : 5801216 **Diagnosed** : 24 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

GFL Environmental - 216
 15 Bermondsey Road
 Toronto, ON
 CA M4B 1Y9
 Contact: Tom Hatzioannidis
 thatzioannidis@gflenv.com
 T: (416)678-9340
 F: