



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**DODGE 422072**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON HP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0122246</b>	---	---
Sample Date		Client Info		<b>06 Jun 2024</b>	---	---
Machine Age	hrs	Client Info		<b>5310</b>	---	---
Oil Age	hrs	Client Info		<b>285</b>	---	---
Filter Age	hrs	Client Info		<b>285</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>11</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>4</b>	---	---
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

**CONTAMINATION**












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	ASTM D7844*	>3	<b>0.1</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.5</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.2</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Boron	ppm	ASTM D5185(m)	0	<b>4</b>	---	---
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	60	<b>57</b>	---	---
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)	1010	<b>924</b>	---	---
Calcium	ppm	ASTM D5185(m)	1070	<b>1031</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	<b>942</b>	---	---
Zinc	ppm	ASTM D5185(m)	1270	<b>1160</b>	---	---
Sulfur	ppm	ASTM D5185(m)	2060	<b>2435</b>	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>16.0</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	118.2	<b>99.6</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	<b>13.8</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	139	<b>139</b>	---	---

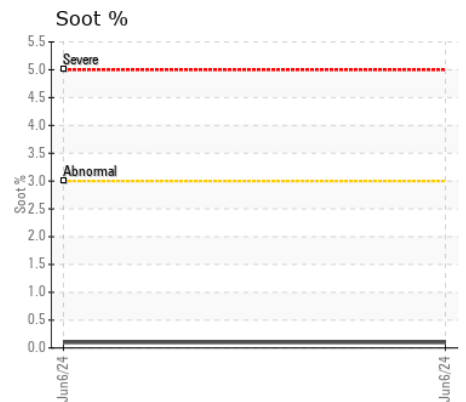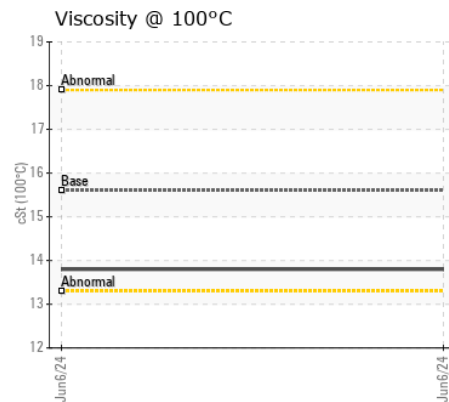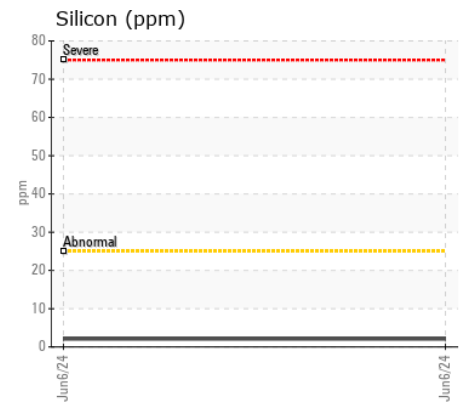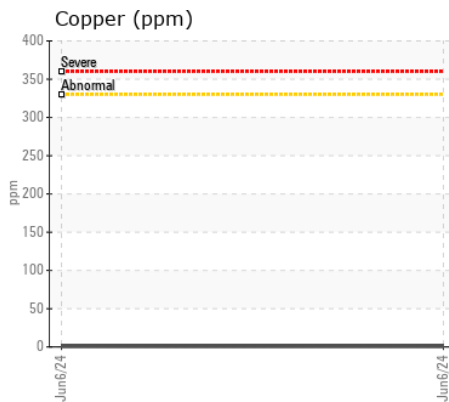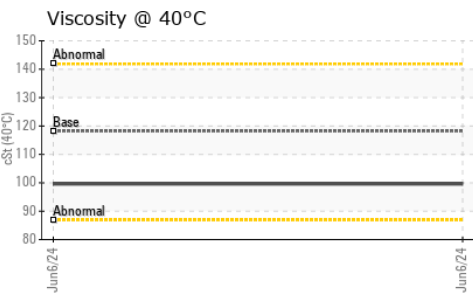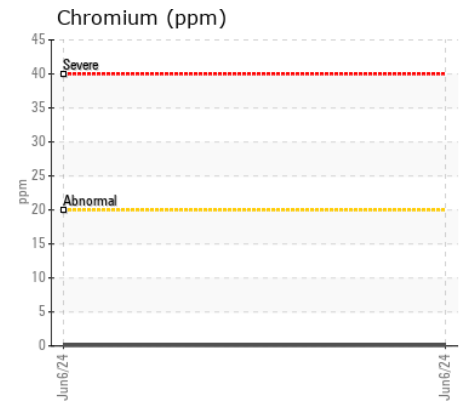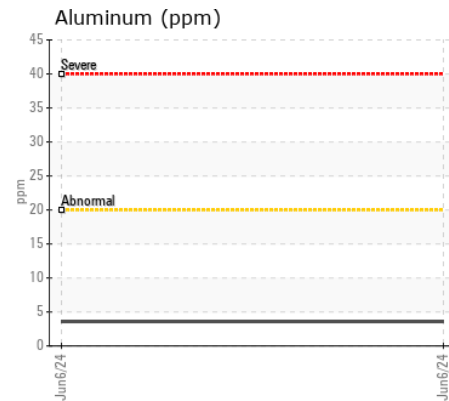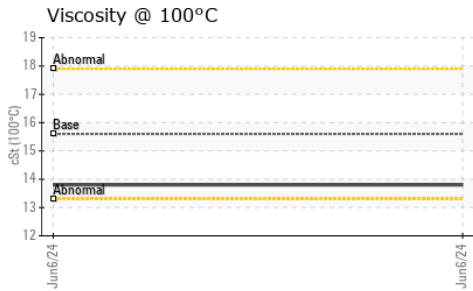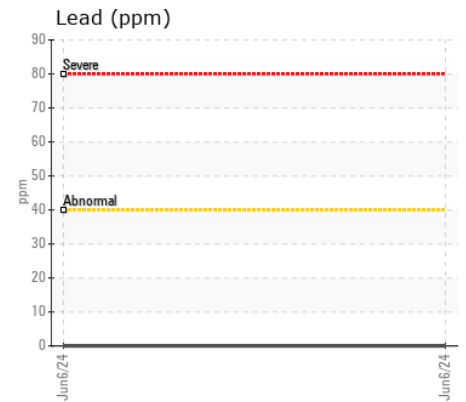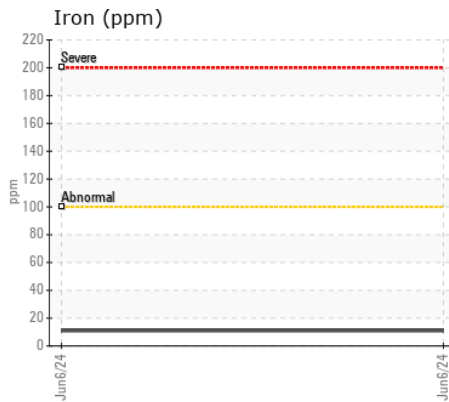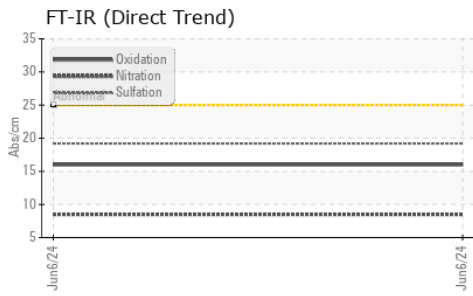

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0122246 **Received** : 28 Jun 2024  
**Lab Number** : 02644533 **Tested** : 28 Jun 2024  
**Unique Number** : 5802072 **Diagnosed** : 28 Jun 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI, Visual )

**GFL Environmental - 987 - Charlottetown**  
 7 Superior Crescent  
 Charlottetown, PE  
 CA C1A 7N5  
 Contact: Vicki Metcalfe  
 vmetcalfe@gflenv.com  
 T: (782)377-5918  
 F: (506)453-9490

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.