



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PORT STERN TUBE
Component
Port Sterntube
Fluid
MOBIL MOBILGEAR 600 XP ISO100 (2288 LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MAR 2 test kits, this testkit includes AN to determine the suitability of the oil for continued use.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION





The condition of the oil is acceptable for the time in service (unconfirmed).

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0926695	WC0926683	WC0803096
Sample Date		Client Info		16 Jun 2024	17 May 2024	20 Apr 2024
Machine Age	hrs	Client Info		45947	45514	45242
Oil Age	hrs	Client Info		2400	0	0
Filter Age	hrs	Client Info		2400	0	0
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Filter Changed		Client Info		None	N/A	None
Sample Status				NORMAL	NORMAL	NORMAL

Iron	ppm	ASTM D5185(m)	>15	14	13	13
Chromium	ppm	ASTM D5185(m)	>2	0	0	0
Nickel	ppm	ASTM D5185(m)	>2	<1	0	0
Titanium	ppm	ASTM D5185(m)	>8	0	0	0
Silver	ppm	ASTM D5185(m)		<1	0	0
Aluminum	ppm	ASTM D5185(m)	>4	<1	0	0
Lead	ppm	ASTM D5185(m)	>15	0	0	0
Copper	ppm	ASTM D5185(m)	>25	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>10	1	1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185(m)	>25	0	0	0
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	VLITE
Sand/Dirt	scalar	Visual*	NONE	VLITE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

Sodium	ppm	ASTM D5185(m)		4	3	3
Boron	ppm	ASTM D5185(m)		7	6	7
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		<1	0	0
Magnesium	ppm	ASTM D5185(m)		1	2	1
Calcium	ppm	ASTM D5185(m)		3	3	3
Phosphorus	ppm	ASTM D5185(m)		318	334	337
Zinc	ppm	ASTM D5185(m)		2	4	3
Sulfur	ppm	ASTM D5185(m)		11758	12005	12148
Visc @ 40°C	cSt	ASTM D7279(m)	100	93.2	94.1	94.1

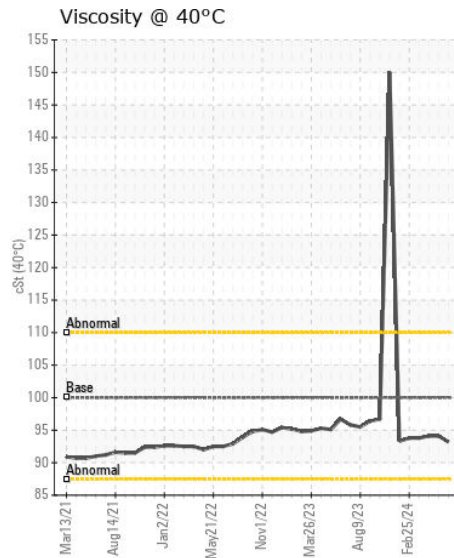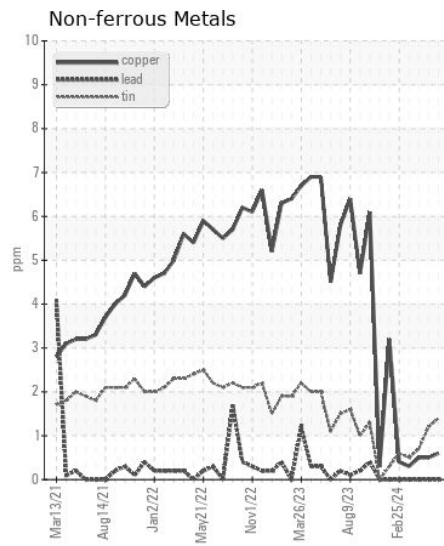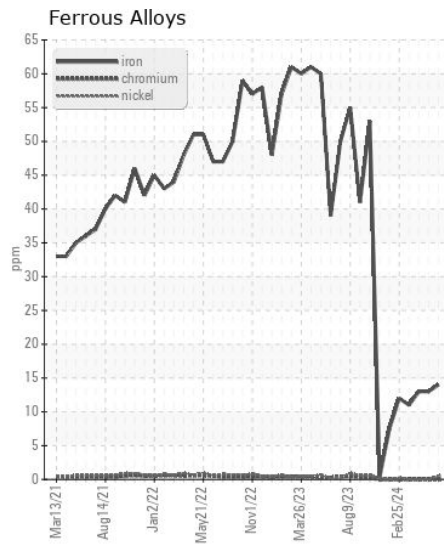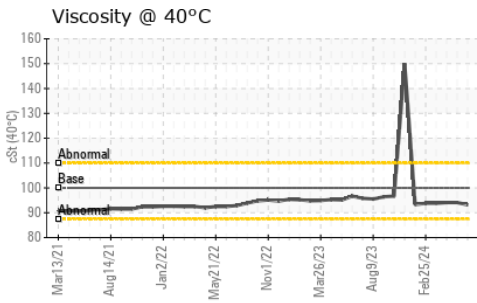

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0926695
Lab Number : 02645027
Unique Number : 5802566
Test Package : MAR 1
Received : 02 Jul 2024
Tested : 02 Jul 2024
Diagnosed : 02 Jul 2024 - Wes Davis

Siem Offshore Canada LP.
 M/V Avalon Sea, 140 WATER STREET SUITE 1000
 ST. JOHN'S, NL
 CA A1C 6H6
 Contact: Avalon Sea
 ecr@avalonsea.siemoffshore.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: