



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FREIGHTLINER 97 FRTL

Component
Diesel Engine

Fluid
TRC MOLY XL PRO-SPEC IV 15W40 (9 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please note that this is a corrected copy for data entry updates.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR04564978	---	---
Sample Date		Client Info		24 Sep 2018	---	---
Machine Age	mls	Client Info		432350	---	---
Oil Age	mls	Client Info		1850	---	---
Filter Age	mls	Client Info		1850	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	8	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>40	2	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>155	4	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	21	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.5	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.7	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	10	---	---
Boron	ppm	ASTM D5185m		49	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		46	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		738	---	---
Calcium	ppm	ASTM D5185m	1300	1276	---	---
Phosphorus	ppm	ASTM D5185m		811	---	---
Zinc	ppm	ASTM D5185m	1300	943	---	---
Sulfur	ppm	ASTM D5185m		2738	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	14	9.67	---	---
Visc @ 100°C	cSt	ASTM D445	15.5	13.92	---	---

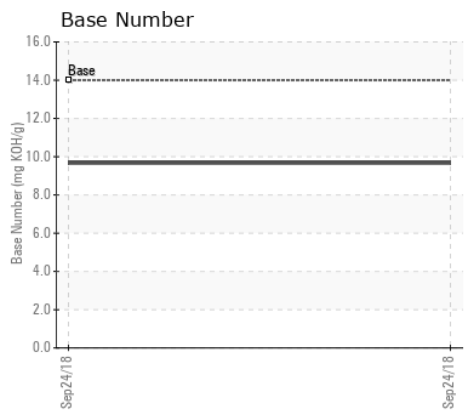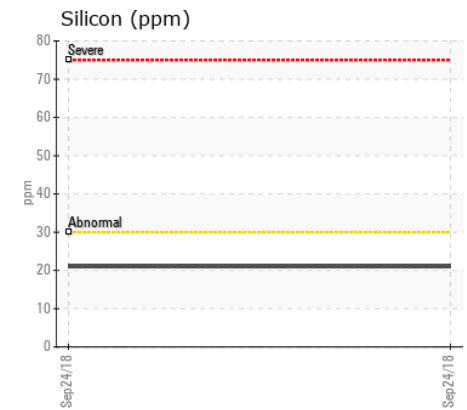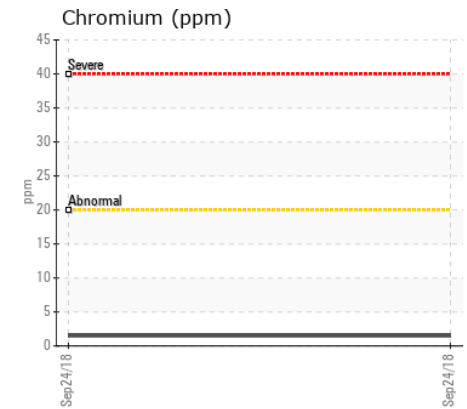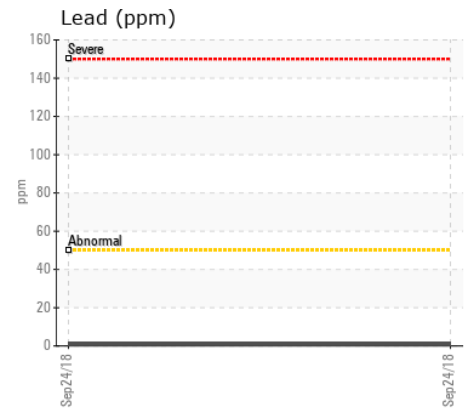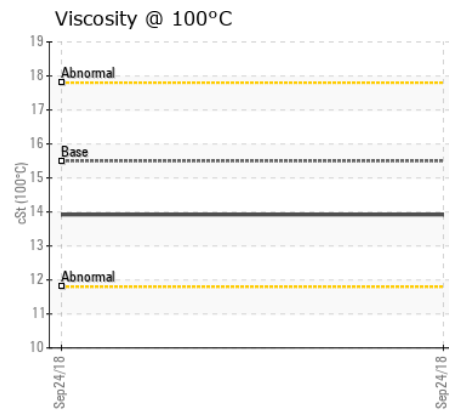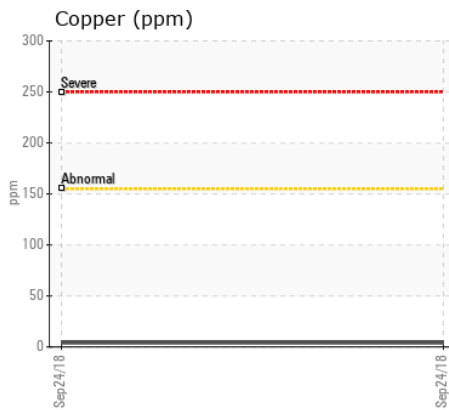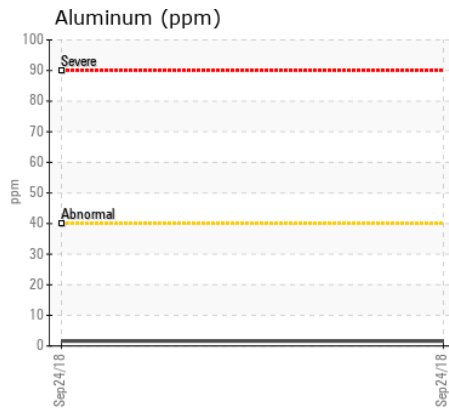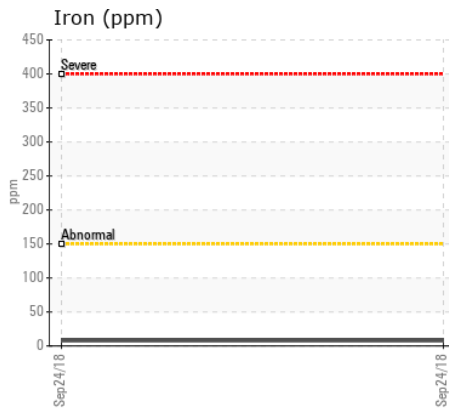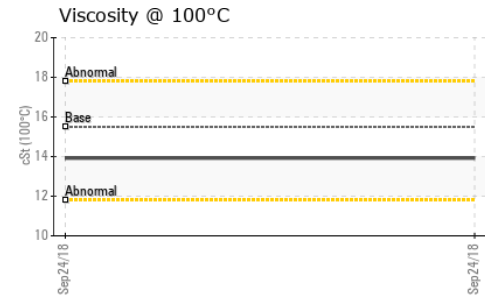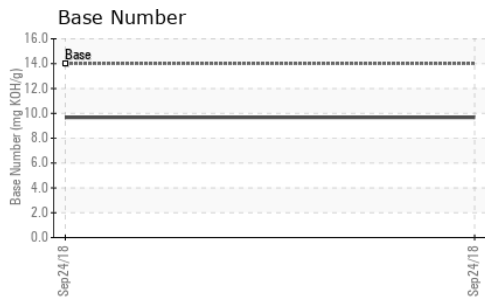

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : TR04564978

Lab Number : 04564978

Unique Number : 8353885

Test Package : MOB 2

Received : 04 Oct 2018

Tested : 08 Oct 2018

Diagnosed : 08 Oct 2018 - Doug Bogart

PHIL HARDER

57803 350TH STREET

MOUNTAIN LAKE, MN

US 56159

Contact: PHILIP HARDER

philbren@frontiernet.net

T: 5(07) 227-6074

F:

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)