



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[SOUTH HOLLAND]
 Machine Id
LIEBHERR LTM 1300 AT1692 - DRIVE 3 (S/N 071692)
 Component
Front Differential
 Fluid
HPL DIFFERENTIAL LIFE 75W90 SYNTHETIC (20 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HPL010853	---	---
Sample Date		Client Info		06 Aug 2020	---	---
Machine Age	mls	Client Info		22832	---	---
Oil Age	mls	Client Info		7545	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	166	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m		<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	<1	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>100	73	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	7	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m		26	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		0	---	---
Calcium	ppm	ASTM D5185m		0	---	---
Phosphorus	ppm	ASTM D5185m		432	---	---
Zinc	ppm	ASTM D5185m		39	---	---
Sulfur	ppm	ASTM D5185m		25056	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.064	---	---
Visc @ 40°C	cSt	ASTM D445		102	---	---

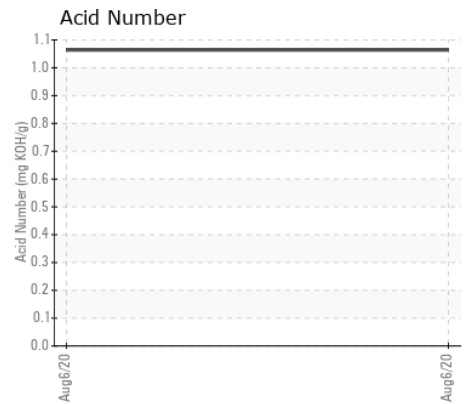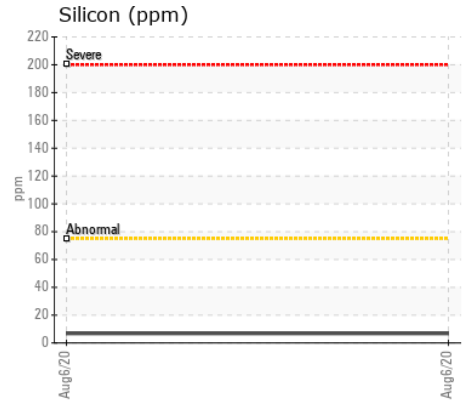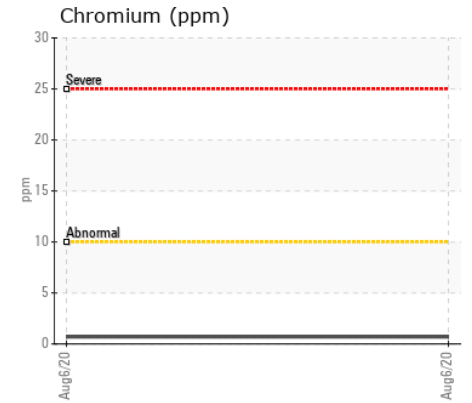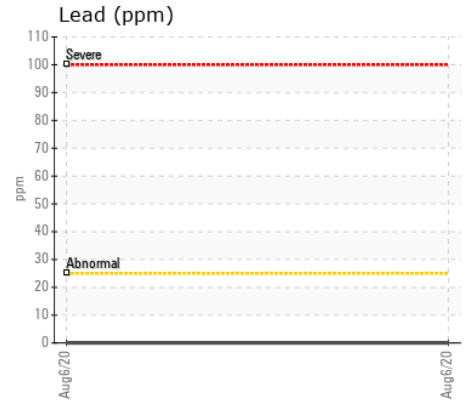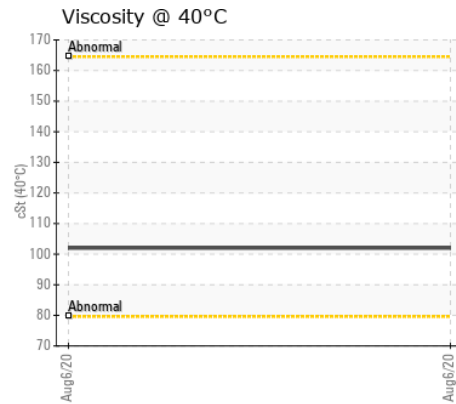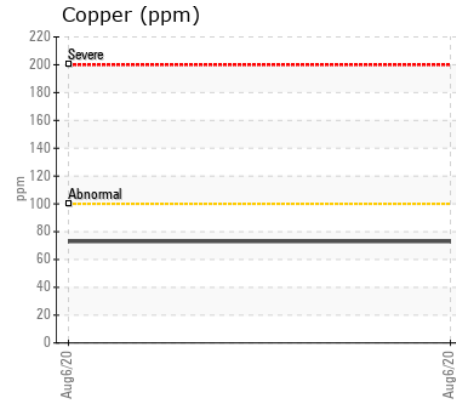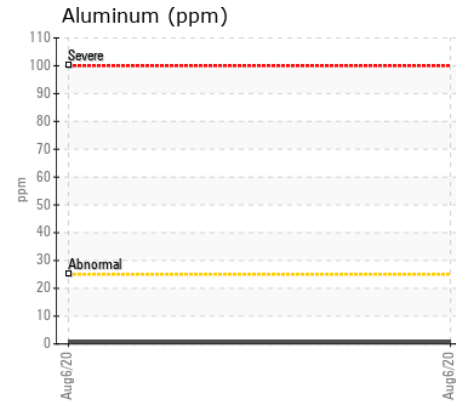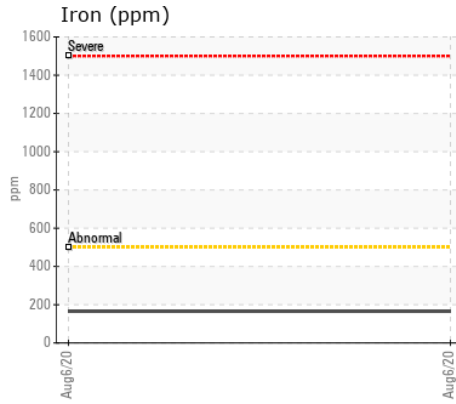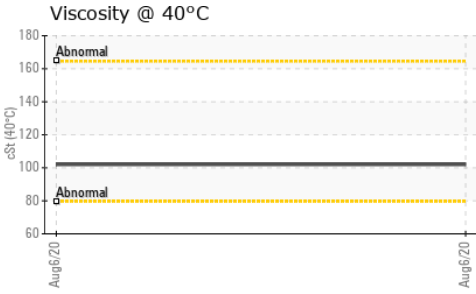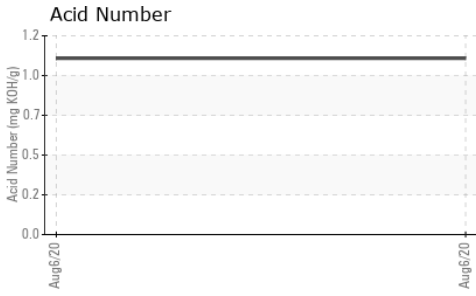

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HPL010853
Lab Number : 05042985
Unique Number : 9138156
Test Package : MOB 2

Received : 13 Aug 2020
Tested : 14 Aug 2020
Diagnosed : 14 Aug 2020 - Wes Davis

STEVENS ON CRANE
 410 STEVENSON DR
 BOLINGBROOK, IL
 US 60440

Contact: DAVE KOEHNE
 davidk@stevensoncrane.com

T: (630)972-9199

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)