



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 8 - Pikeville [128328]
Machine Id
JOHN DEERE 310E 1DW310EXPNF713877
Component
Hydraulic System
Fluid
JOHN DEERE HYDRAU (30 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: OIL WAS CHANGED 13 HOURS AGO)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0029889	---	---
Sample Date		Client Info		25 May 2022	---	---
Machine Age	hrs	Client Info		176	---	---
Oil Age	hrs	Client Info		13	---	---
Filter Age	hrs	Client Info		176	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	16	---	---
Iron	ppm	ASTM D5185m	>71	<1	---	---
Chromium	ppm	ASTM D5185m	>11	0	---	---
Nickel	ppm	ASTM D5185m	>6	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>11	<1	---	---
Lead	ppm	ASTM D5185m	>13	0	---	---
Copper	ppm	ASTM D5185m	>21	<1	---	---
Tin	ppm	ASTM D5185m	>5	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>24	<1	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.075	NEG	---	---
Particles >4µm		ASTM D7647	>80000	595	---	---
Particles >6µm		ASTM D7647	>5000	115	---	---
Particles >14µm		ASTM D7647	>640	12	---	---
Particles >21µm		ASTM D7647	>160	2	---	---
Particles >38µm		ASTM D7647	>40	0	---	---
Particles >71µm		ASTM D7647	>10	0	---	---
Oil Cleanliness		ISO 4406 (c)	>23/19/16	16/14/11	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<1	---	---
Boron	ppm	ASTM D5185m		<1	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		0	---	---
Calcium	ppm	ASTM D5185m	87	78	---	---
Phosphorus	ppm	ASTM D5185m	727	607	---	---
Zinc	ppm	ASTM D5185m	900	795	---	---
Sulfur	ppm	ASTM D5185m	1500	1382	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.75	---	---
Visc @ 40°C	cSt	ASTM D445	65	60.5	---	---

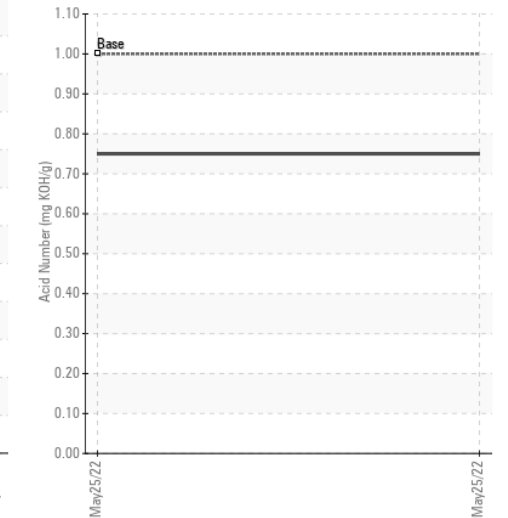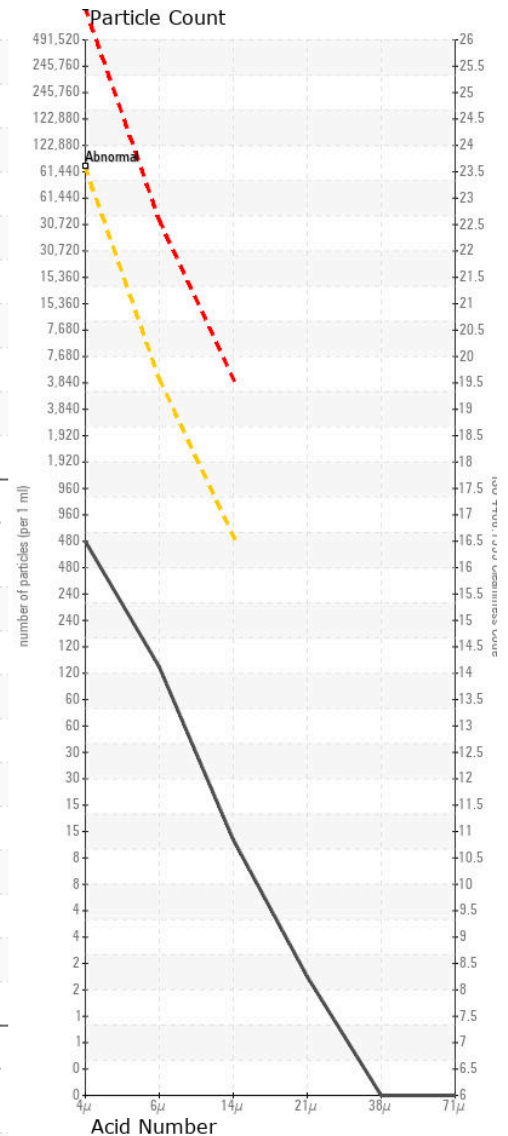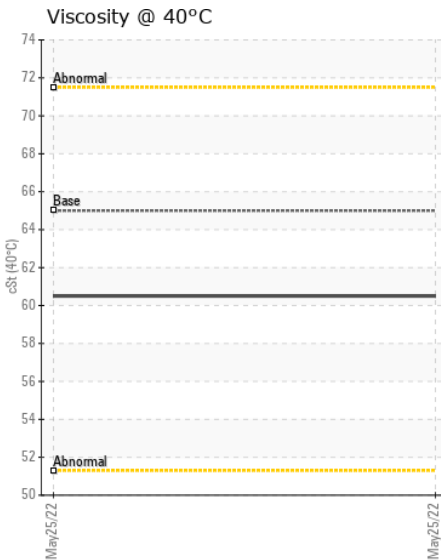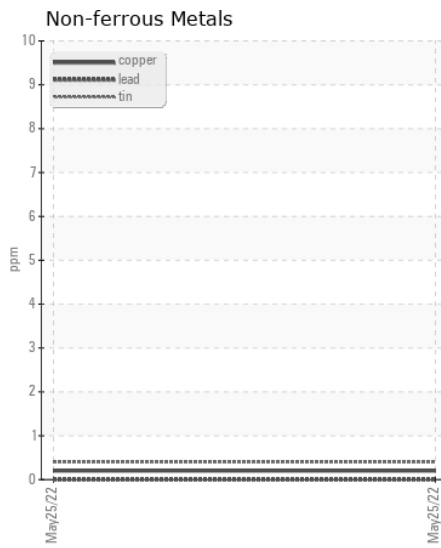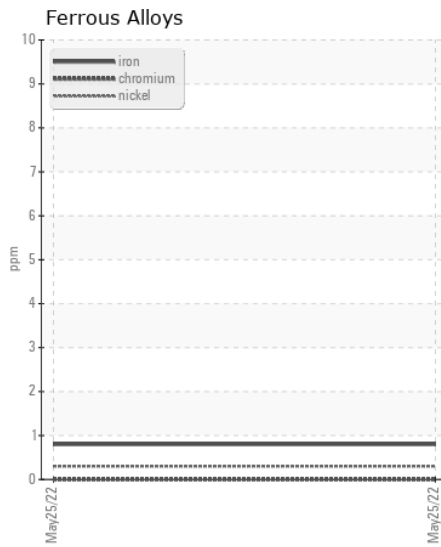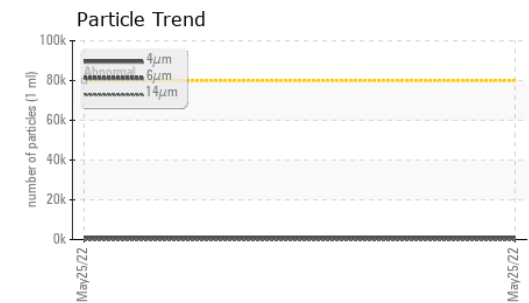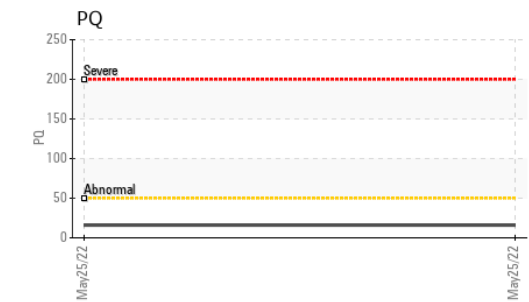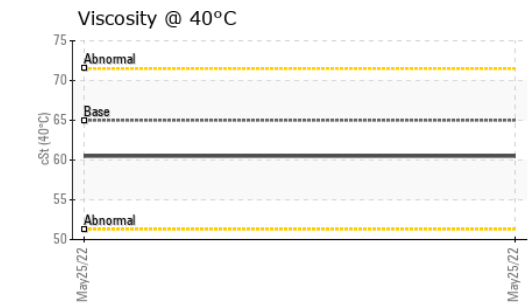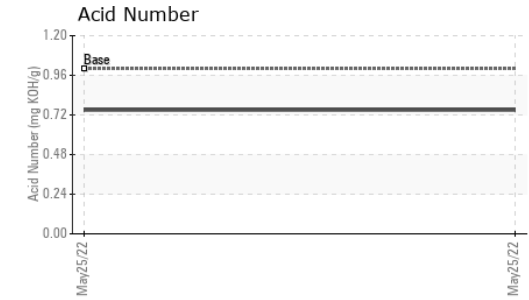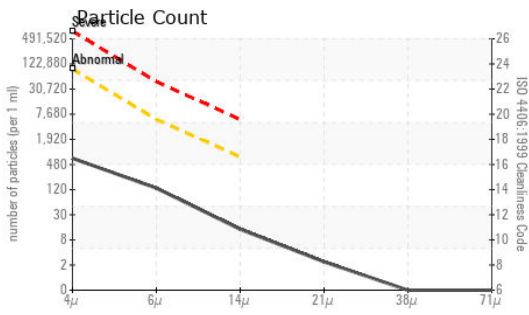

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0029889 **Received** : 27 May 2022
Lab Number : 05555846 **Diagnosed** : 31 May 2022
Unique Number : 9995234 **Diagnostician** : Jonathan Hester
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570