



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Area
Store 9 - Marietta
 Machine Id
JOHN DEERE 35G 1FF035GXJMK293636
 Component
Right Propel Gearbox
 Fluid
JOHN DEERE GL-5 80W90 (20 Oz)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0035586	---	---
Sample Date		Client Info		20 Oct 2022	---	---
Machine Age	hrs	Client Info		255	---	---
Oil Age	hrs	Client Info		255	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		None	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		77	---	---
Iron	ppm	ASTM D5185m	>1250	163	---	---
Chromium	ppm	ASTM D5185m		3	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		5	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		2	---	---
Tin	ppm	ASTM D5185m		<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	MODER	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		18	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The oil viscosity is lower than normal. This plus the additive levels indicates the addition of a different brand, or type of oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		1	---	---
Boron	ppm	ASTM D5185m		17	---	---
Barium	ppm	ASTM D5185m		35	---	---
Molybdenum	ppm	ASTM D5185m		17	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		13	---	---
Calcium	ppm	ASTM D5185m		4009	---	---
Phosphorus	ppm	ASTM D5185m		609	---	---
Zinc	ppm	ASTM D5185m		719	---	---
Sulfur	ppm	ASTM D5185m		2968	---	---
Visc @ 40°C	cSt	ASTM D445		94.3	---	---

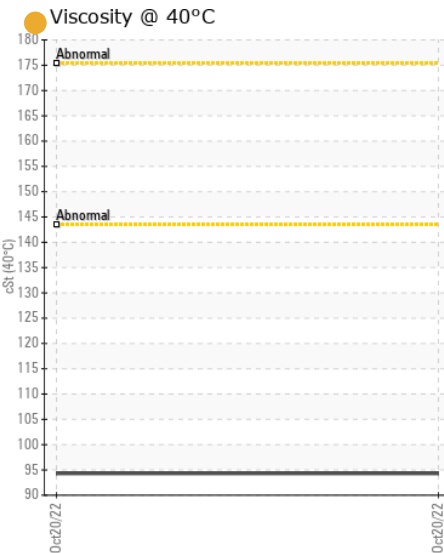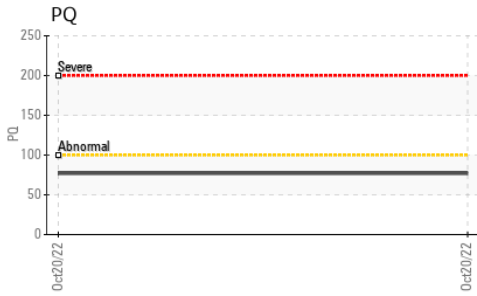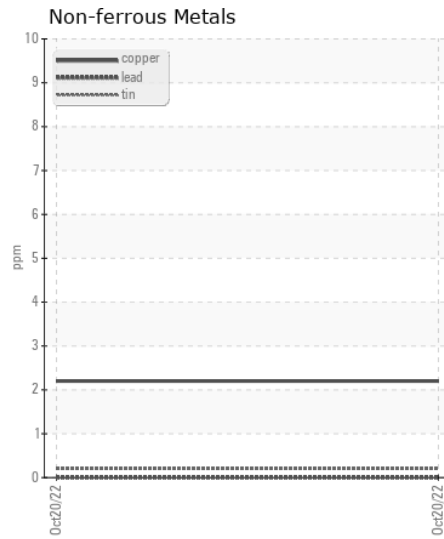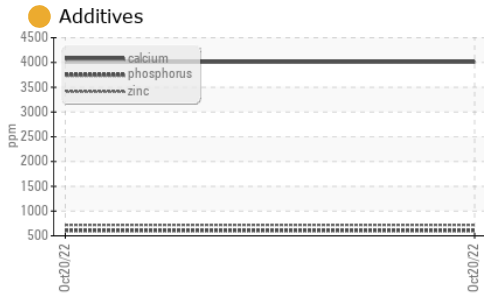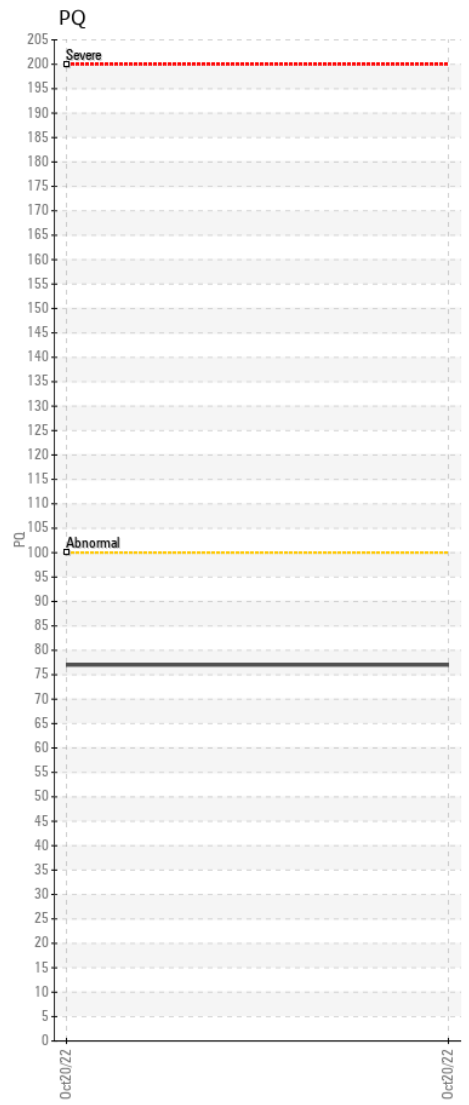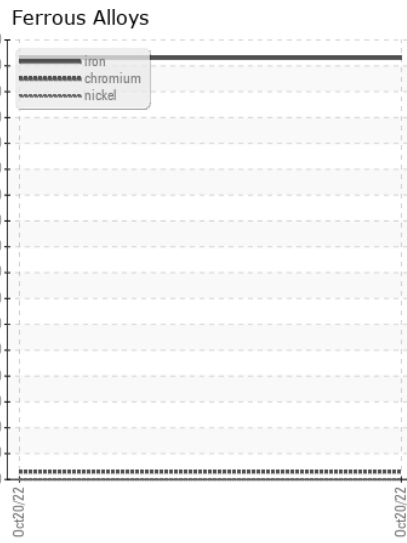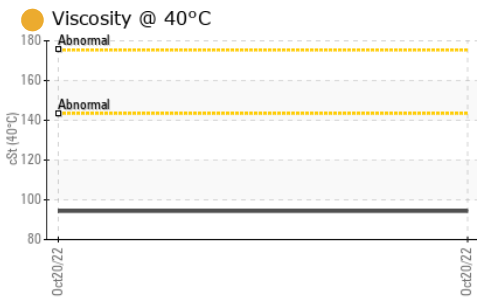

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0035586 **Received** : 24 Oct 2022
Lab Number : 05674601 **Tested** : 26 Oct 2022
Unique Number : 10189172 **Diagnosed** : 26 Oct 2022 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (740)373-5570