



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH40M 1215-124371
Component
Front Differential
Fluid
LIEBHERR GEAR BASIC 90 LS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0236712	LH0236271	LH0213412
Sample Date		Client Info		20 Jan 2023	06 Sep 2022	24 Feb 2022
Machine Age	hrs	Client Info		2616	1949	1033
Oil Age	hrs	Client Info		671	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Changed
Filter Changed		Client Info		N/A	Not Changed	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	10	4	77
Chromium	ppm	ASTM D5185m	>5	0	0	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>5	<1	1	2
Lead	ppm	ASTM D5185m	>5	0	0	<1
Copper	ppm	ASTM D5185m	>125	3	6	40
Tin	ppm	ASTM D5185m	>5	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	MODER	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	2	<1	12
Potassium	ppm	ASTM D5185m	>20	0	0	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

Confirm oil type. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	2	11
Boron	ppm	ASTM D5185m	0	8	2	7
Barium	ppm	ASTM D5185m	0	0	42	0
Molybdenum	ppm	ASTM D5185m	0	2	0	2
Manganese	ppm	ASTM D5185m	0	<1	<1	3
Magnesium	ppm	ASTM D5185m	<1	12	<1	2
Calcium	ppm	ASTM D5185m	<1	44	9	283
Phosphorus	ppm	ASTM D5185m	2143	1731	2163	2313
Zinc	ppm	ASTM D5185m	<1	27	6	94
Sulfur	ppm	ASTM D5185m	23468	30478	25056	24351
Visc @ 40°C	cSt	ASTM D445	170	163	174	153

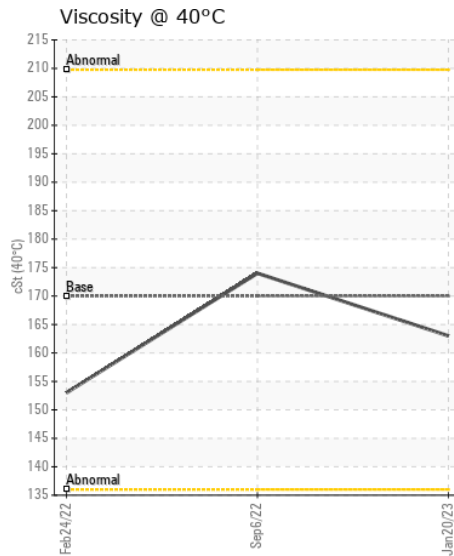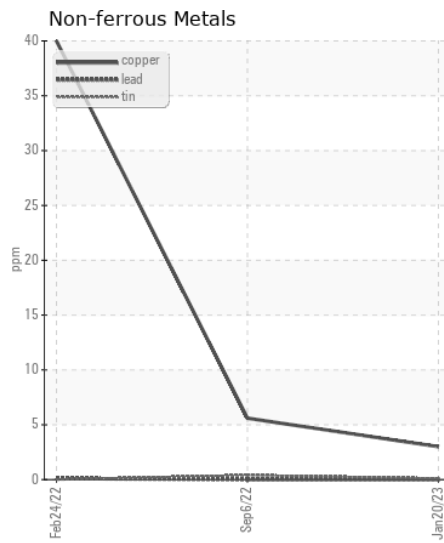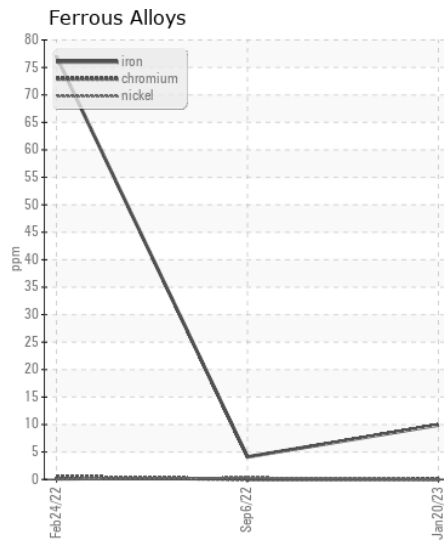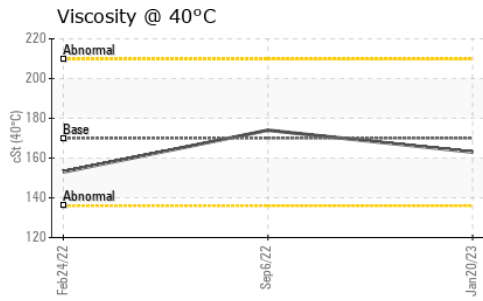

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0236712
Lab Number : 05751106
Unique Number : 10310710
Test Package : CONST
Received : 26 Jan 2023
Tested : 27 Jan 2023
Diagnosed : 27 Jan 2023 - Sean Felton

SADOFF IRON AND METAL
 240 ARNDT STREET
 FOND DU LAC, WI
 US 54936
 Contact: DAVE CASPER
 casperd@sadoff.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: