



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
TRANE N98B00779 CH1
Component
Refrigeration Compressor
Fluid
TRANE 0022 (15 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

WEAR

The tin level is abnormal. All other component wear rates are normal.

CONTAMINATION


There is no indication of any contamination in the oil.

FLUID CONDITION


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0783453	---	---
Sample Date		Client Info		04 Apr 2023	---	---
Machine Age	hrs	Client Info		32289	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---
<hr/>						
Iron	ppm	ASTM D5185m	>50	13	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	<1	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>50	1	---	---
Tin	ppm	ASTM D5185m	>10	▲ 14	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
<hr/>						
Silicon	ppm	ASTM D5185m	>15	12	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water	%	ASTM D6304	>0.01	0.002	---	---
ppm Water	ppm	ASTM D6304	>100	19.6	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.01	NEG	---	---
<hr/>						
Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		<1	---	---
Calcium	ppm	ASTM D5185m		0	---	---
Phosphorus	ppm	ASTM D5185m		2	---	---
Zinc	ppm	ASTM D5185m		9	---	---
Sulfur	ppm	ASTM D5185m		0	---	---
Acid Number (AN)	mg KOH/g	ASTM D974		0.072	---	---
Visc @ 40°C	cSt	ASTM D445		43.6	---	---


▲ Non-ferrous Metals

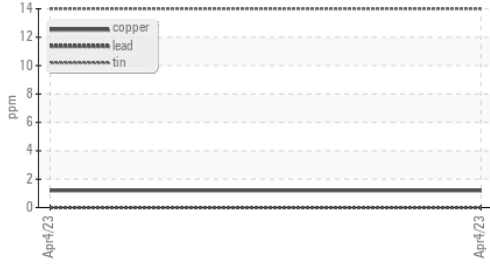


Ferrous Alloys

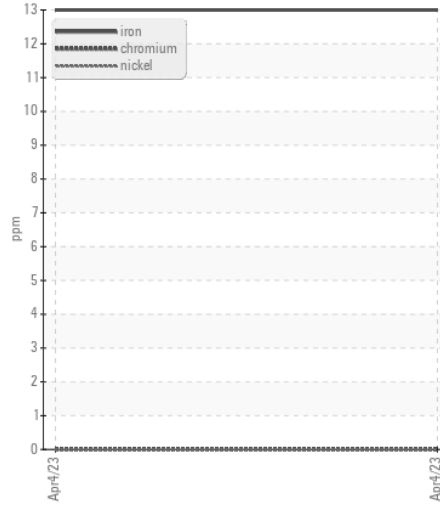


Acid Number

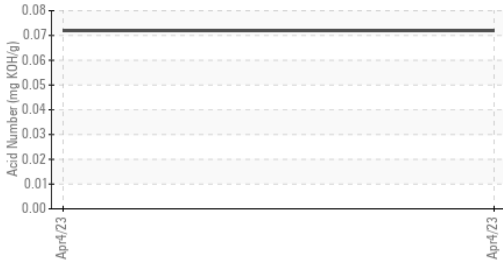


▲ Non-ferrous Metals

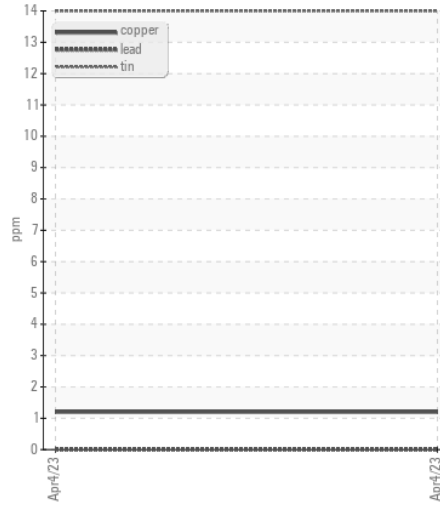


Water (KF)

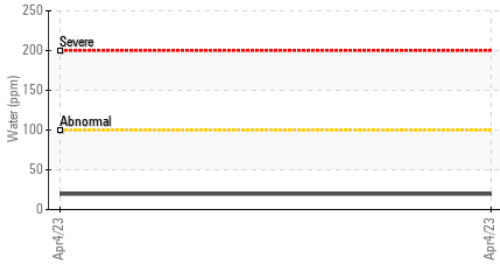


Viscosity @ 40°C

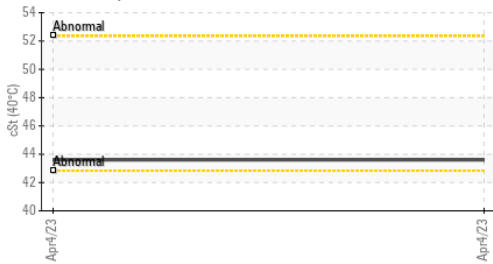

Viscosity @ 40°C

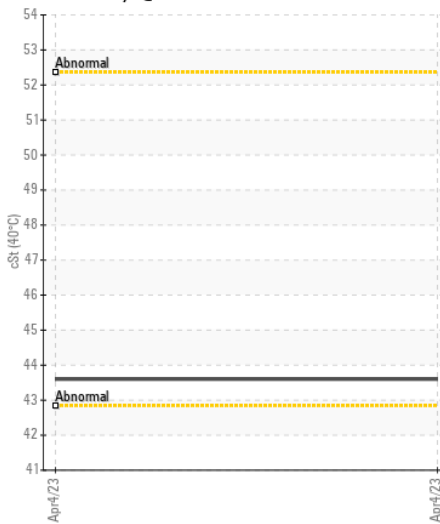

Acid Number

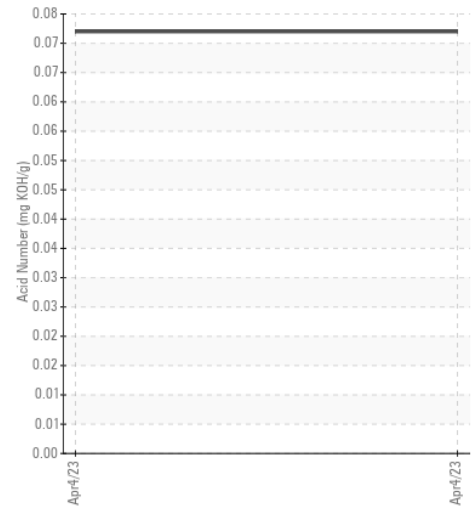

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0783453 **Received** : 14 Apr 2023
Lab Number : 05821082 **Diagnosed** : 18 Apr 2023
Unique Number : 10429165 **Diagnostician** : Don Baldrige
Test Package : IND 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

DAIKIN APPLIED
 5021 HOWERTON WAY SUITE P
 BOWIE, MD
 US 20715

Contact: ANDREW TURLINGTON
 andrew.turlington@daikinapplied.com

T: (301)735-1440
 F: (301)735-1838