



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W7325]
 Machine Id
JOHN DEERE 824K 1DW824KXVJF687635
 Component
Transmission (Manual)
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W7325)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0141216	JR0140673	JR0098456
Sample Date		Client Info		23 Jun 2023	27 Jan 2023	23 Sep 2022
Machine Age	hrs	Client Info		8845	8004	7501
Oil Age	hrs	Client Info		841	6574	7501
Filter Age	hrs	Client Info		841	0	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Not Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	15	10	10
Iron	ppm	ASTM D5185m	>200	23	16	13
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>7	0	<1	0
Aluminum	ppm	ASTM D5185m	>25	<1	1	1
Lead	ppm	ASTM D5185m	>45	0	<1	<1
Copper	ppm	ASTM D5185m	>225	6	5	4
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	7	3	3
Potassium	ppm	ASTM D5185m	>20	3	1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	4	4
Boron	ppm	ASTM D5185m	6	1	0	<1
Barium	ppm	ASTM D5185m	0	<1	0	0
Molybdenum	ppm	ASTM D5185m	0	2	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	145	94	90	96
Calcium	ppm	ASTM D5185m	3570	3642	3302	3463
Phosphorus	ppm	ASTM D5185m	1290	1101	952	1000
Zinc	ppm	ASTM D5185m	1640	1272	1173	1208
Sulfur	ppm	ASTM D5185m		3559	3938	4123
Visc @ 40°C	cSt	ASTM D445	57.0	50.6	52.8	51.0

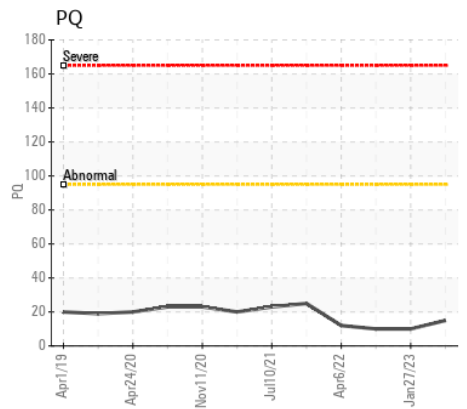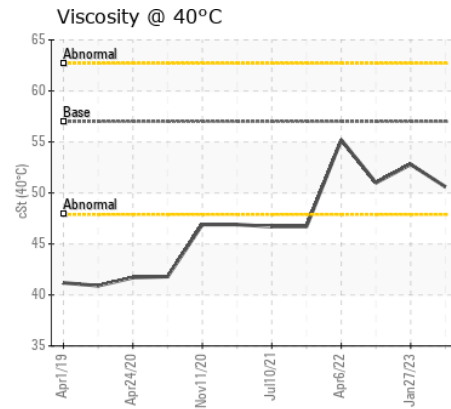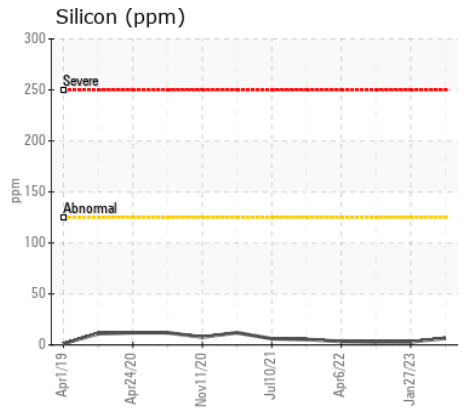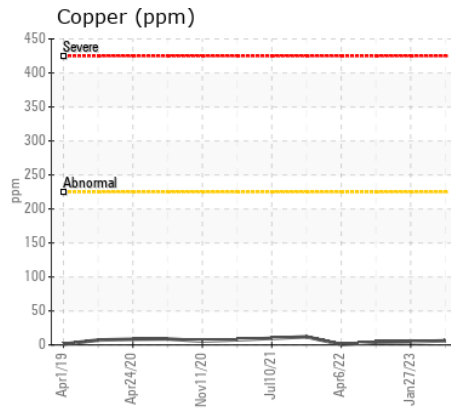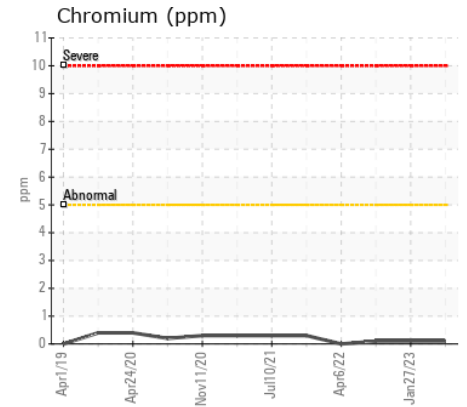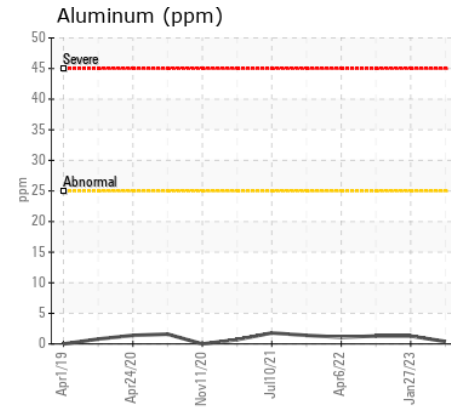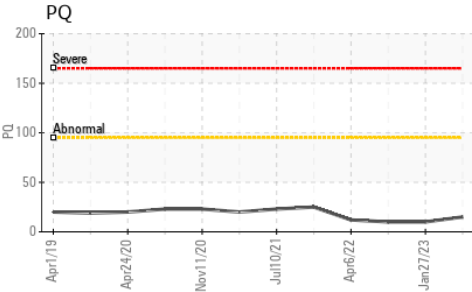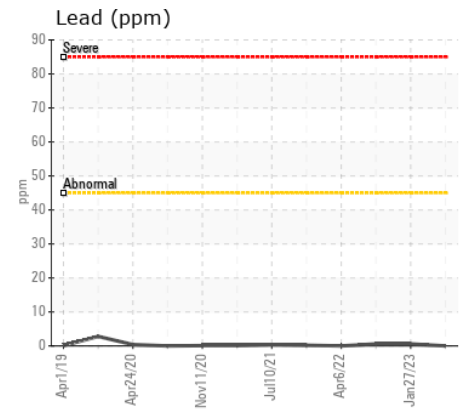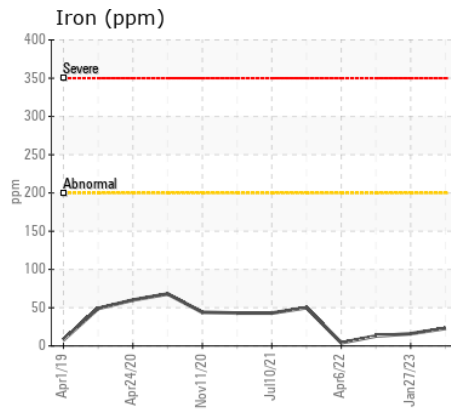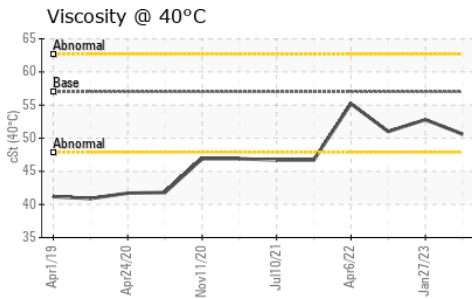

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0141216 **Received** : 27 Jun 2023
Lab Number : 05885207 **Tested** : 28 Jun 2023
Unique Number : 10535690 **Diagnosed** : 30 Jun 2023 - Don Baldrige
Test Package : MOBCE (Additional Tests: PQ)

JRE - HOPE MILLS/FAYETTEVILLE
 5039 HWY 301 SOUTH
 HOPE MILLS, NC
 US 28348
 Contact: FAYETTEVILLE SHOP
 stephen.mullis@jamesriverequipment.com; panastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: