



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
NORDBERG 5026
Component
Gearbox
Fluid
SHELL OMALA 68 (200 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0746916	WC0633918	WC0427782
Sample Date		Client Info		15 Aug 2023	04 Nov 2022	10 Feb 2020
Machine Age	hrs	Client Info		41313	39932	35277
Oil Age	hrs	Client Info		500	500	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	51	65	35
Chromium	ppm	ASTM D5185m	>10	0	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	3	4	9
Lead	ppm	ASTM D5185m	>50	32	39	38
Copper	ppm	ASTM D5185m	>200	1	4	77
Tin	ppm	ASTM D5185m	>10	<1	<1	7
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	7	9	30
Potassium	ppm	ASTM D5185m	>20	2	0	5
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	2	2
Boron	ppm	ASTM D5185m		0	3	2
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		1	<1	2
Calcium	ppm	ASTM D5185m		8	10	13
Phosphorus	ppm	ASTM D5185m		281	256	276
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		9273	10245	7147
Visc @ 40°C	cSt	ASTM D445	68.0	69.0	67.1	66.6

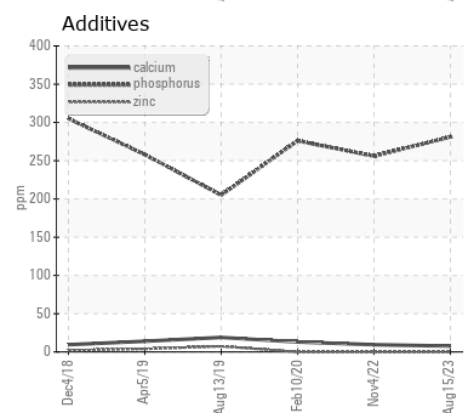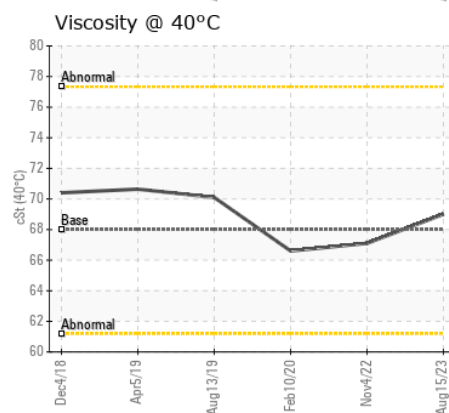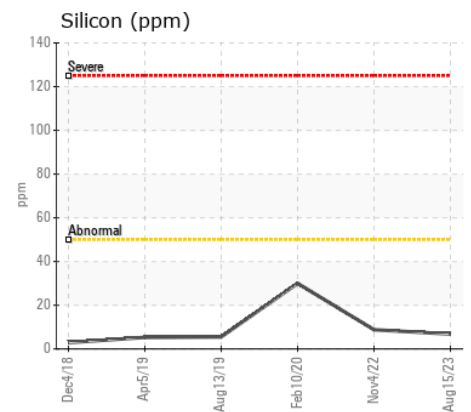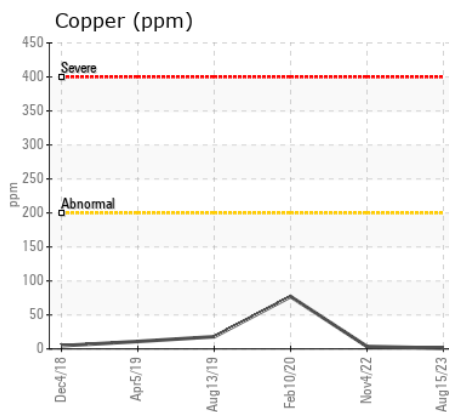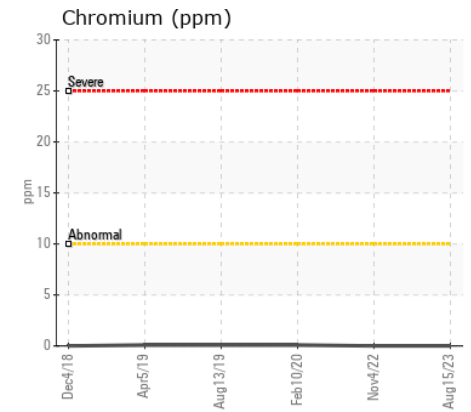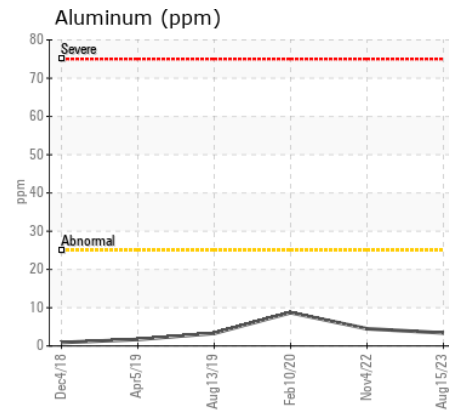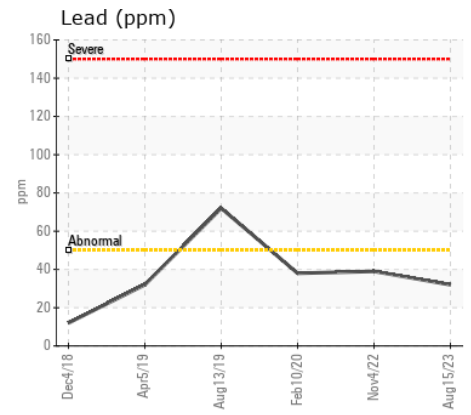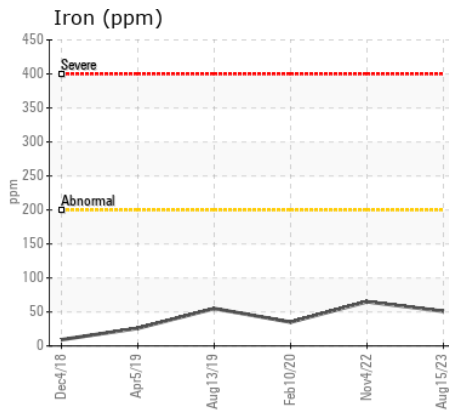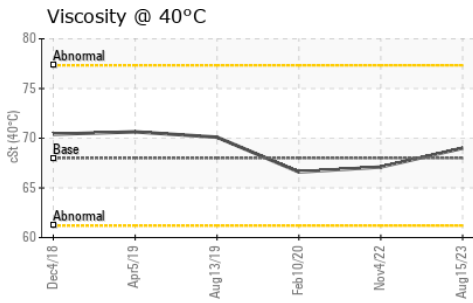

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0746916
Lab Number : 05931251
Unique Number : 10616522
Test Package : MOB 1
Received : 22 Aug 2023
Tested : 23 Aug 2023
Diagnosed : 23 Aug 2023 - Wes Davis

WAKE STONE CORPORATION - BATTLEBORO
 NASH CO. QUARRY, 7379 N. HALIFAX RD.
 BATTLEBORO, NC
 US 27809
 Contact: WAYNE HILL
 waynehill@wakestonecorp.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)