



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 750K 1T0750KXKJF331507
Component
Right Outer Final Drive
Fluid
NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0186381	JR0153098	JR0101645
Sample Date		Client Info		11 Sep 2023	08 Nov 2022	25 Aug 2021
Machine Age	hrs	Client Info		4617	3533	2073
Oil Age	hrs	Client Info		3157	3533	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	20	117	126
Iron	ppm	ASTM D5185m	>750	18	109	174
Chromium	ppm	ASTM D5185m	>9	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	1	1
Titanium	ppm	ASTM D5185m		0	1	2
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	1	13	28
Lead	ppm	ASTM D5185m	>15	0	1	0
Copper	ppm	ASTM D5185m	>40	0	<1	<1
Tin	ppm	ASTM D5185m	>10	<1	1	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>75	4	32	70
Potassium	ppm	ASTM D5185m	>20	0	0	15
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<1	<1	2
Boron	ppm	ASTM D5185m		0	2	4
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	1	0
Manganese	ppm	ASTM D5185m		<1	<1	2
Magnesium	ppm	ASTM D5185m		107	104	106
Calcium	ppm	ASTM D5185m		3692	3412	3761
Phosphorus	ppm	ASTM D5185m		1051	995	1045
Zinc	ppm	ASTM D5185m		1315	1194	1259
Sulfur	ppm	ASTM D5185m		4470	3756	3078
Visc @ 40°C	cSt	ASTM D445		58.5	54.2	47.1


Viscosity @ 40°C

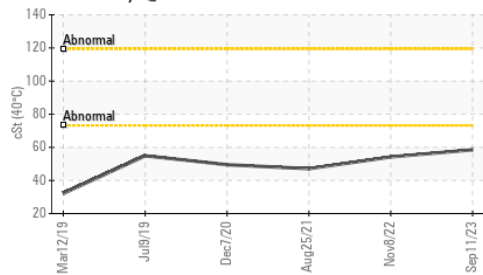


PQ

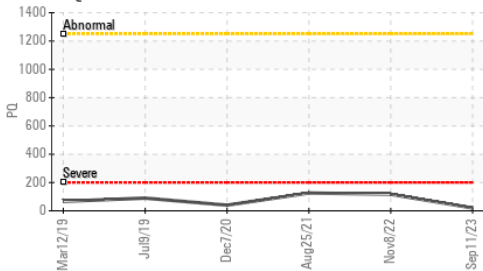


Ferrous Alloys

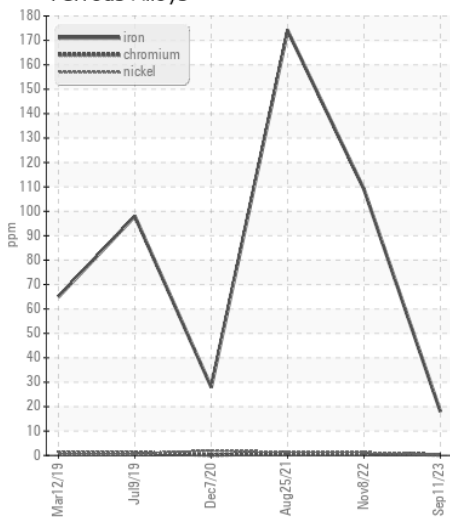


Non-ferrous Metals

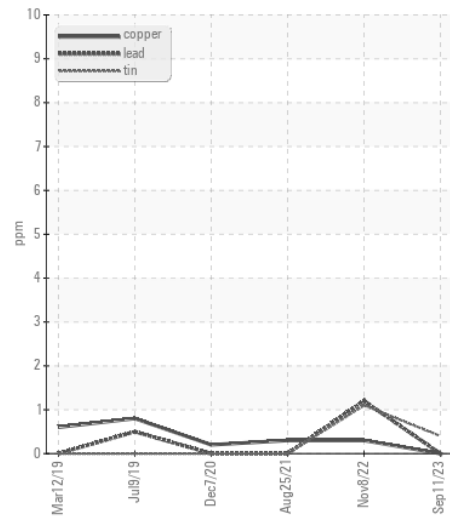

PQ

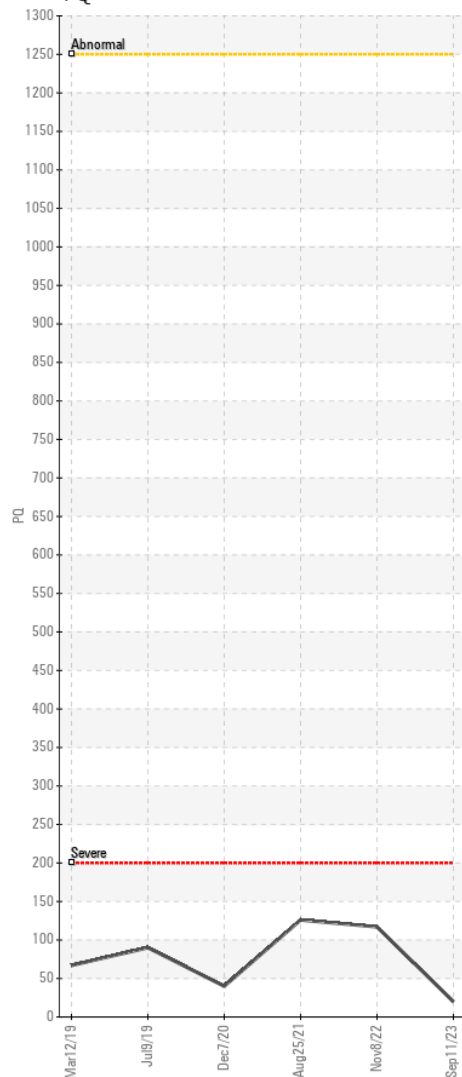

Viscosity @ 40°C

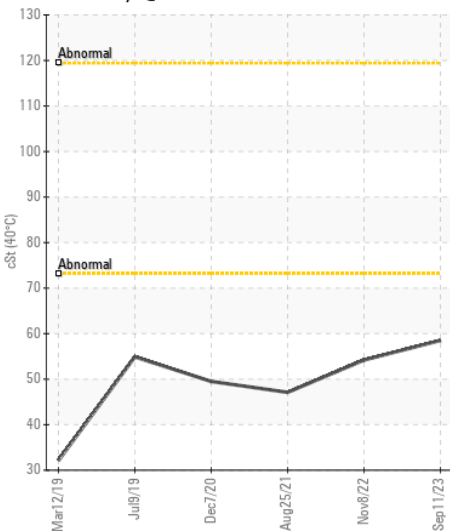

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0186381 **Received** : 14 Sep 2023
Lab Number : 05951694 **Tested** : 18 Sep 2023
Unique Number : 10647653 **Diagnosed** : 19 Sep 2023 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529
 Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com
 T: (919)614-2260
 F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)