



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
DARRYL THOMAS [7717048]
 Machine Id
VOLVO PENTA A1051009
 Component
Starboard Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA036238	---	---
Sample Date		Client Info		03 Oct 2023	---	---
Machine Age	hrs	Client Info		276	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	32	---	---
Chromium	ppm	ASTM D5185m	>6	2	---	---
Nickel	ppm	ASTM D5185m	>2	3	---	---
Titanium	ppm	ASTM D5185m	>2	0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>20	18	---	---
Lead	ppm	ASTM D5185m	>95	4	---	---
Copper	ppm	ASTM D5185m	>85	10	---	---
Tin	ppm	ASTM D5185m	>9	2	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	16	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.6	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.9	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		248	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		103	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		756	---	---
Calcium	ppm	ASTM D5185m		1377	---	---
Phosphorus	ppm	ASTM D5185m		658	---	---
Zinc	ppm	ASTM D5185m		935	---	---
Sulfur	ppm	ASTM D5185m		3476	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.7	---	---
Visc @ 100°C	cSt	ASTM D445		13.5	---	---

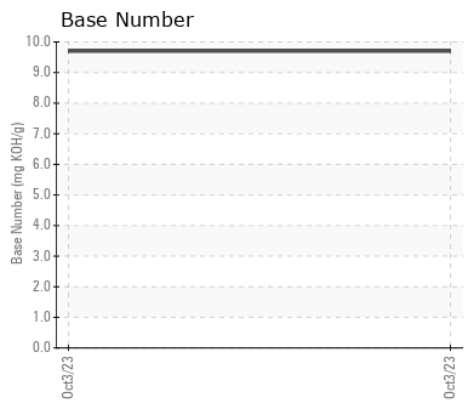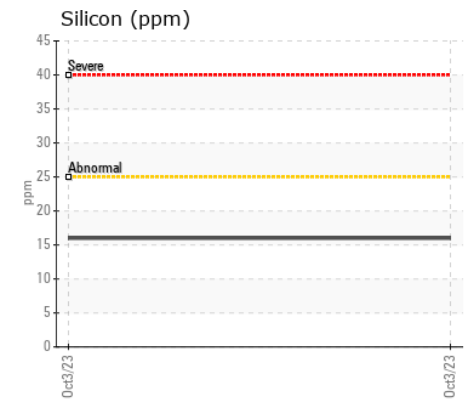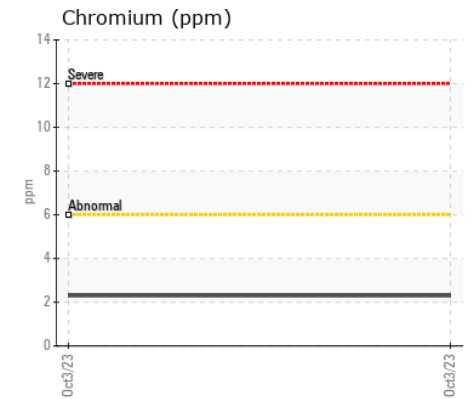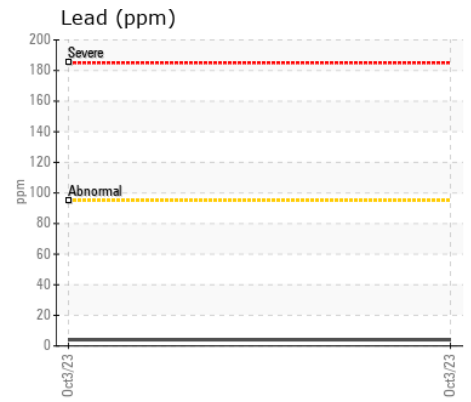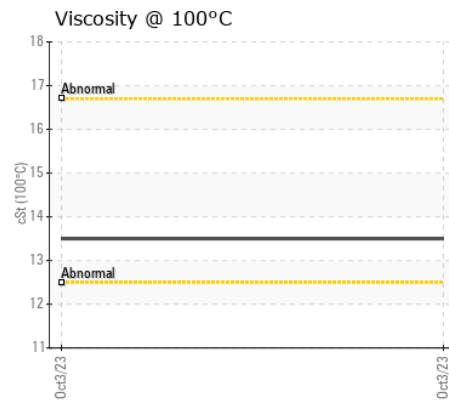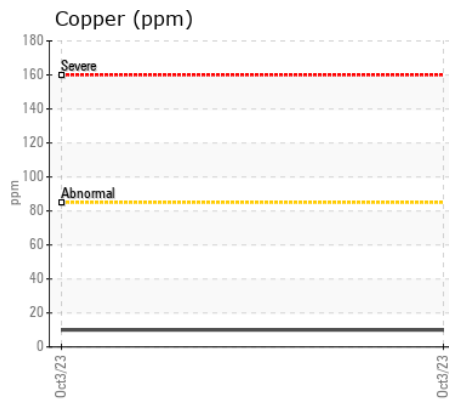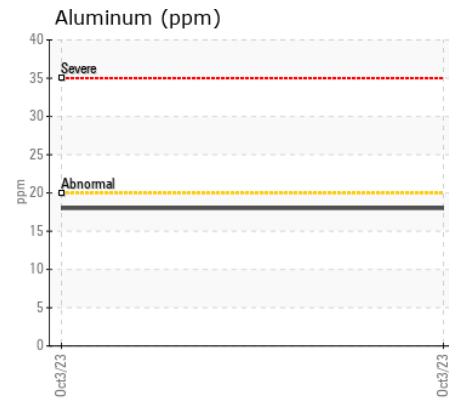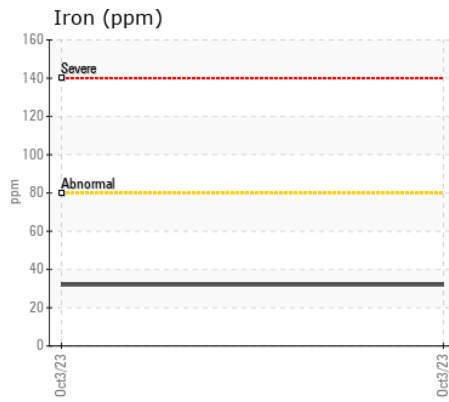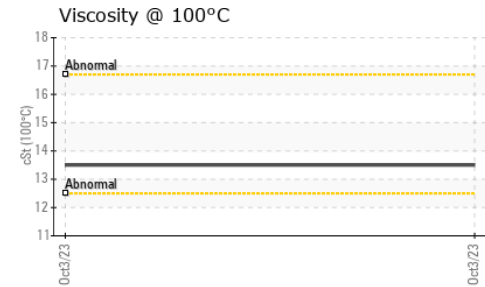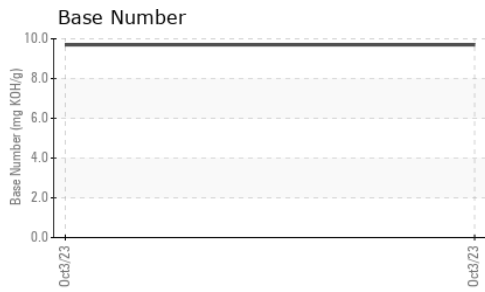

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA036238 **Received** : 25 Oct 2023
Lab Number : 05988915 **Tested** : 26 Oct 2023
Unique Number : 10711577 **Diagnosed** : 27 Oct 2023 - Sean Felton
Test Package : MOB 1 (Additional Tests: TBN)

Pacific Power Group - VP981534
 7215 S 228th St
 Kent, WA
 US 98032
 Contact: PAT RYAN
 pryan@pacificpowergroup.com
 T: (253)520-5163
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)