



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**Store 8 - Pikeville [RO#144551]**  
Machine Id  
**JOHN DEERE 210G 1FF210GXCNF530264**  
Component  
**Hydraulic System**  
Fluid  
**HITACHI HYDRAULIC SUPER EX 46HN (63 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0045637</b>	LEC0032435	---
Sample Date		Client Info		<b>23 Oct 2023</b>	06 Sep 2022	---
Machine Age	hrs	Client Info		<b>610</b>	24	---
Oil Age	hrs	Client Info		<b>610</b>	24	---
Filter Age	hrs	Client Info		<b>610</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	<b>15</b>	8	---
Iron	ppm	ASTM D5185m	>32	<b>0</b>	<1	---
Chromium	ppm	ASTM D5185m	>9	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>9	<b>0</b>	0	---
Lead	ppm	ASTM D5185m	>28	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	2	---
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>11	<b>&lt;1</b>	0	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Water		WC Method	>0.075	<b>NEG</b>	NEG	---
Particles >4µm		ASTM D7647	>80000	<b>3237</b>	2604	---
Particles >6µm		ASTM D7647	>20000	<b>371</b>	304	---
Particles >14µm		ASTM D7647	>640	<b>20</b>	33	---
Particles >21µm		ASTM D7647	>160	<b>7</b>	8	---
Particles >38µm		ASTM D7647	>40	<b>1</b>	0	---
Particles >71µm		ASTM D7647	>10	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	<b>19/16/11</b>	19/15/12	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	---

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<b>0</b>	<1	---
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>4</b>	0	---
Calcium	ppm	ASTM D5185m		<b>5</b>	2	---
Phosphorus	ppm	ASTM D5185m	827	<b>606</b>	585	---
Zinc	ppm	ASTM D5185m	0	<b>15</b>	17	---
Sulfur	ppm	ASTM D5185m	13	<b>68</b>	77	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	<b>0.04</b>	0.082	---
Visc @ 40°C	cSt	ASTM D445	47	<b>48.4</b>	47.4	---

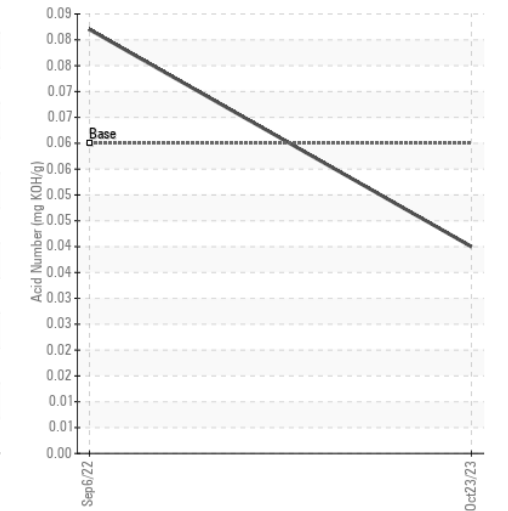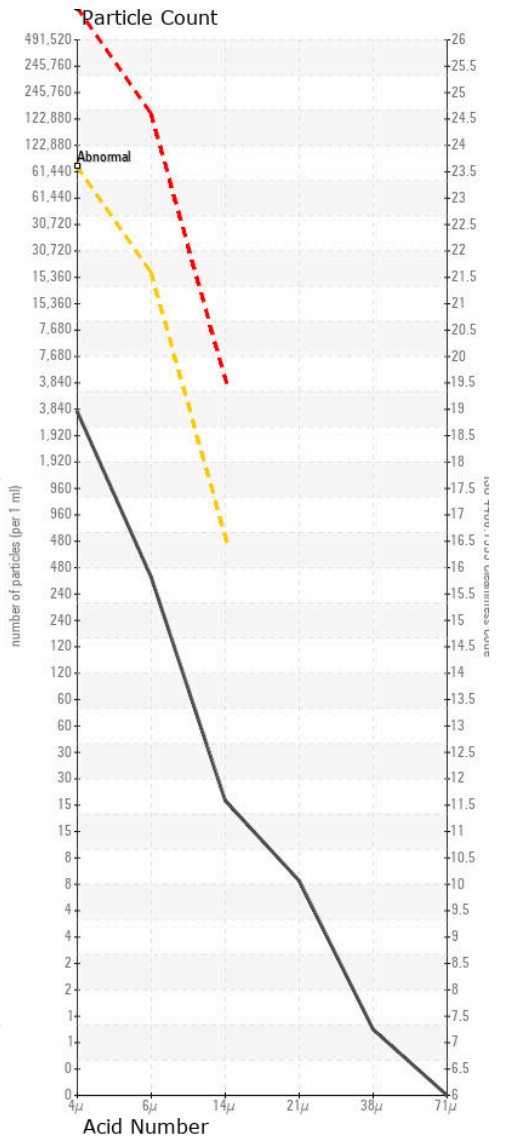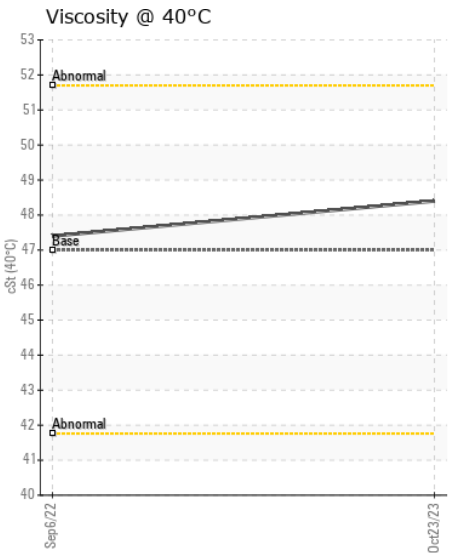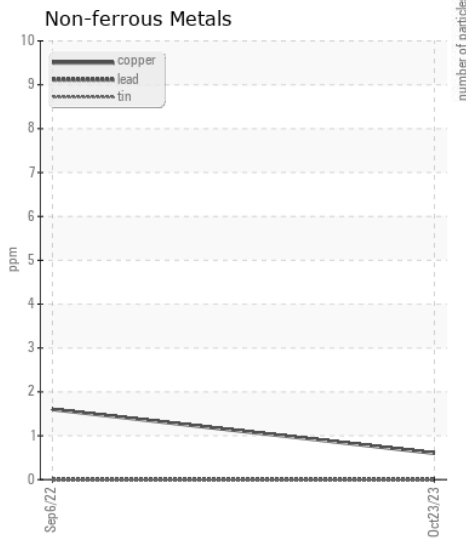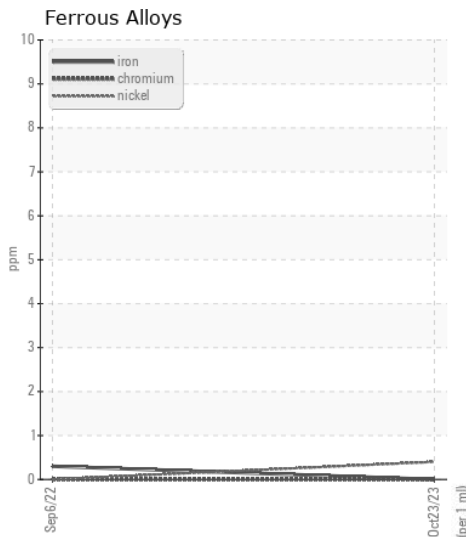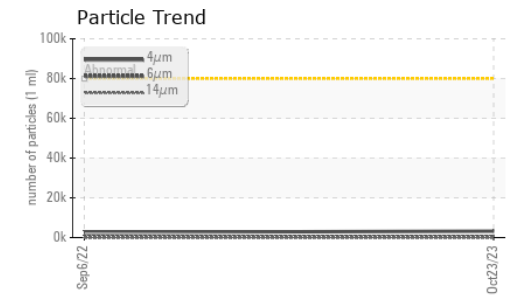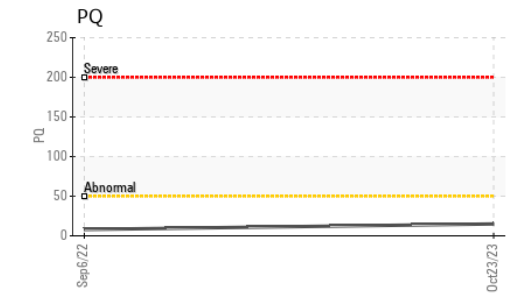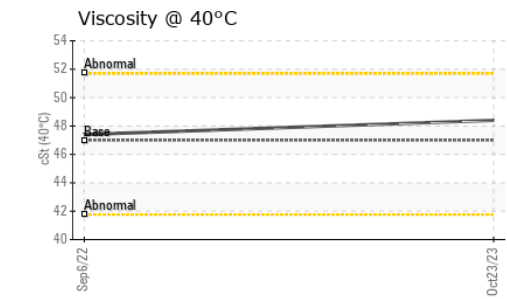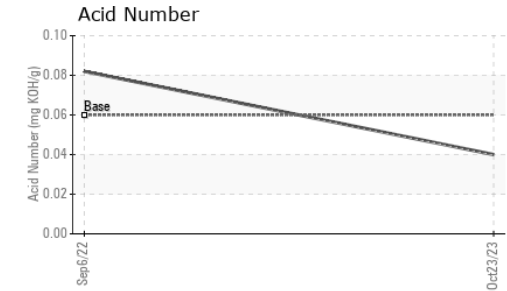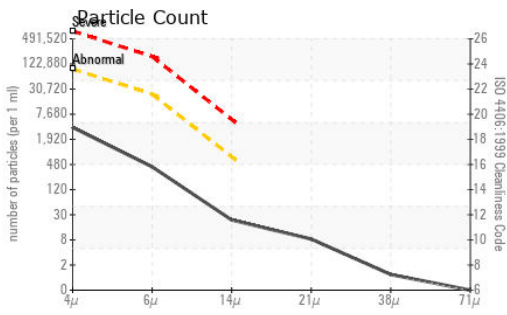

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0045637 **Received** : 26 Oct 2023  
**Lab Number** : 05990259 **Tested** : 27 Oct 2023  
**Unique Number** : 10712921 **Diagnosed** : 27 Oct 2023 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: (740)373-5570