



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PRINTING PRESS 7256
Component
Gearbox
Fluid
GEAR OIL ISO 150 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PTK0000395	PTK0000351	PTK0001318
Sample Date		Client Info		09 Nov 2023	13 Jun 2023	23 Nov 2022
Machine Age	wks	Client Info		0	0	0
Oil Age	wks	Client Info		0	0	0
Filter Age	wks	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	4	3	3
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	<1
Lead	ppm	ASTM D5185m	>50	0	<1	<1
Copper	ppm	ASTM D5185m	>200	2	1	2
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>50	<1	<1	2
Potassium	ppm	ASTM D5185m	>20	0	1	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Particles >4µm		ASTM D7647		10543	8104	7096
Particles >6µm		ASTM D7647	>2500	392	459	213
Particles >14µm		ASTM D7647	>320	16	56	18
Particles >21µm		ASTM D7647	>80	5	18	6
Particles >38µm		ASTM D7647	>20	0	1	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>18/15	16/11	16/13	15/11
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	<1	2
Boron	ppm	ASTM D5185m	50	0	<1	0
Barium	ppm	ASTM D5185m	15	0	2	0
Molybdenum	ppm	ASTM D5185m	15	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	50	0	<1	<1
Calcium	ppm	ASTM D5185m	50	1	2	<1
Phosphorus	ppm	ASTM D5185m	350	297	310	337
Zinc	ppm	ASTM D5185m	100	9	6	3
Sulfur	ppm	ASTM D5185m	12500	15175	17027	16463
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	0.66	0.74	0.77
Visc @ 40°C	cSt	ASTM D445	150	154	155	151

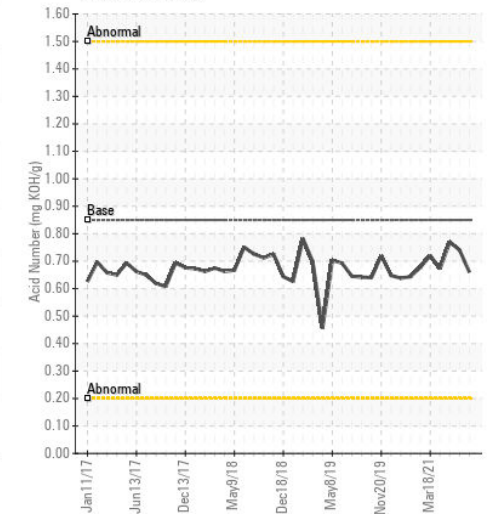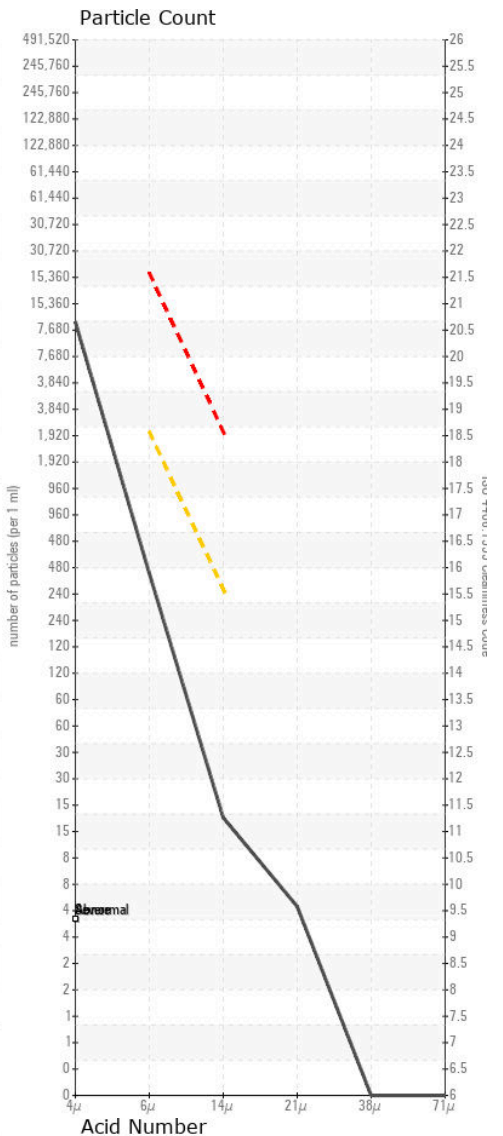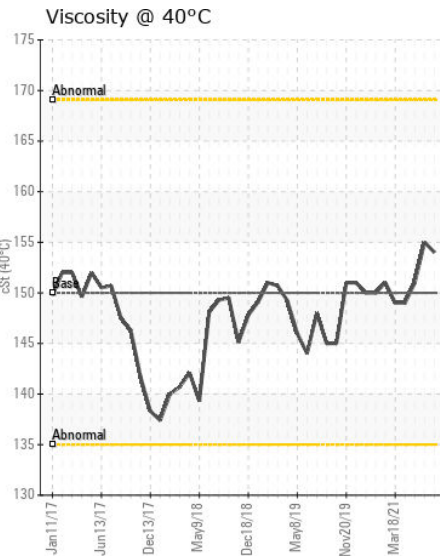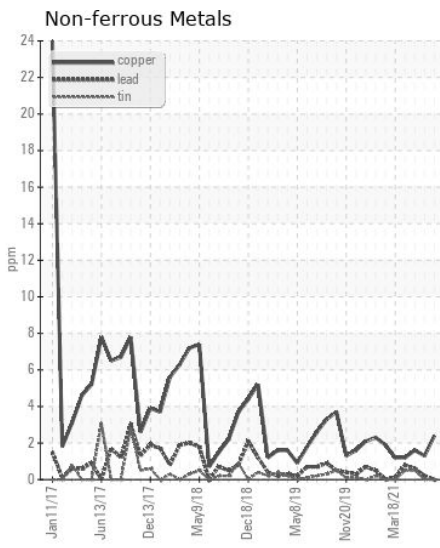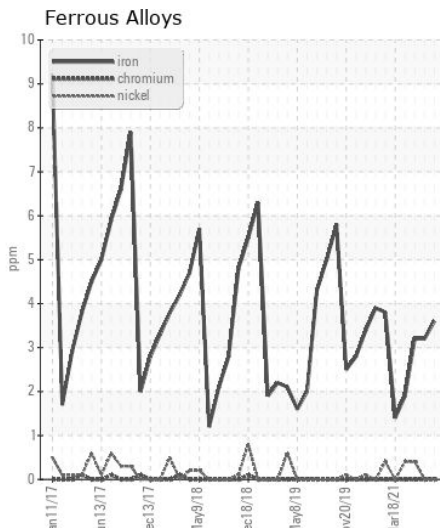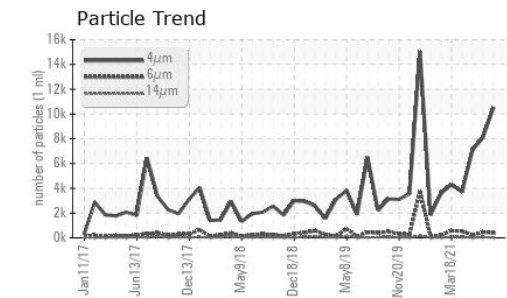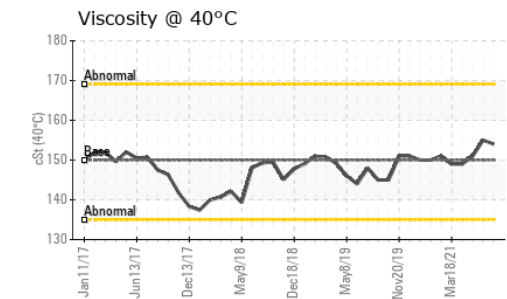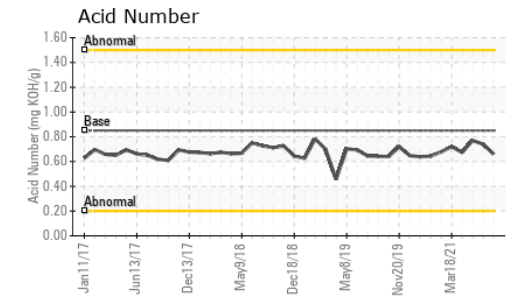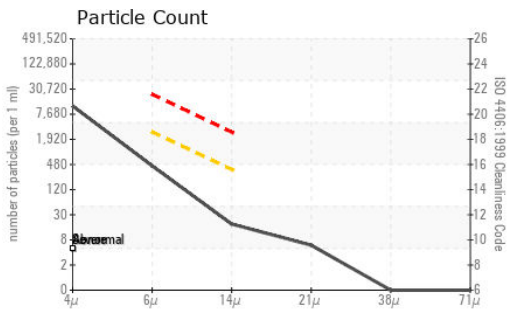

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PTK0000395 **Received** : 24 Nov 2023
Lab Number : 06017324 **Tested** : 28 Nov 2023
Unique Number : 10756468 **Diagnosed** : 28 Nov 2023 - Wes Davis
Test Package : MOB 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

GRAPHIC PACKAGING

1500 NICHOLAS BLVD
 ELK GROVE, IL
 US 60017

Contact: TONY HILDY
 anthonyhildy@graphicpkg.com

T: (847)437-1700

F: