



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Store 4 - Fairmont [145759]
 Machine Id
CHEV 3500HD 1GB4YSEY5LF233821
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (10 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0044471	LEC0042190	LEC0038192
Sample Date		Client Info		07 Dec 2023	05 Sep 2023	08 May 2023
Machine Age	mls	Client Info		130738	142839	123238
Oil Age	mls	Client Info		7500	28296	8695
Filter Age	mls	Client Info		7500	28296	8695
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	21	42	35
Chromium	ppm	ASTM D5185m	>20	<1	2	1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	7	13	9
Lead	ppm	ASTM D5185m	>40	1	2	2
Copper	ppm	ASTM D5185m	>330	<1	2	4
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>120	11	8	8
Potassium	ppm	ASTM D5185m	>20	4	9	8
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.7	1	0.8
Nitration	Abs/cm	*ASTM D7624	>20	9.9	11.7	10.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.6	24.3	23.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	<1	<1
Boron	ppm	ASTM D5185m		198	127	159
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		237	218	226
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		799	742	766
Calcium	ppm	ASTM D5185m		1381	1373	1519
Phosphorus	ppm	ASTM D5185m		895	791	865
Zinc	ppm	ASTM D5185m		1103	1000	1094
Sulfur	ppm	ASTM D5185m		3028	3247	3292
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.9	20.2	19.1
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.3	9.2	8.9
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	12.7	13.3

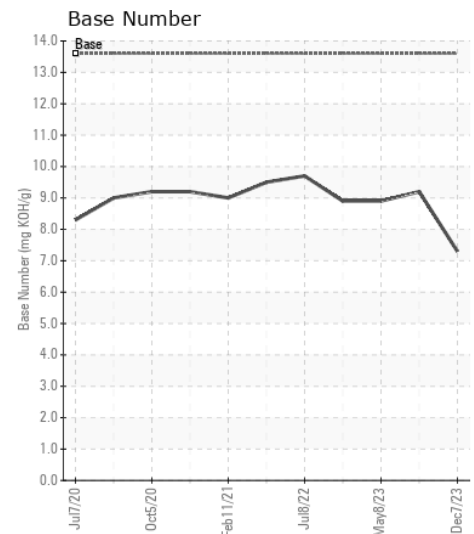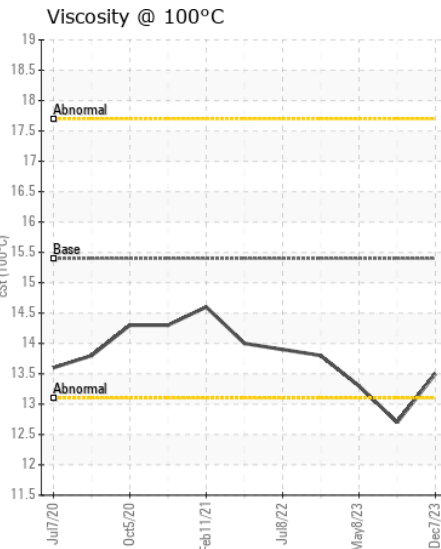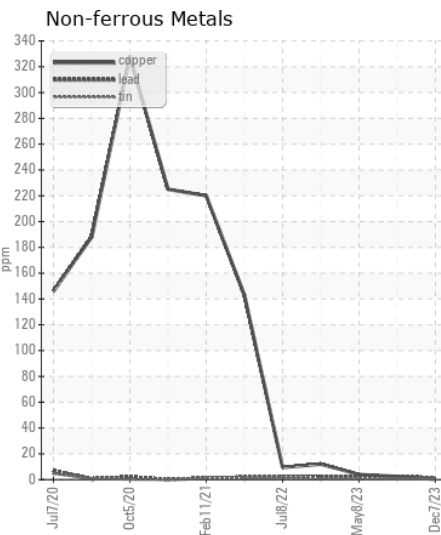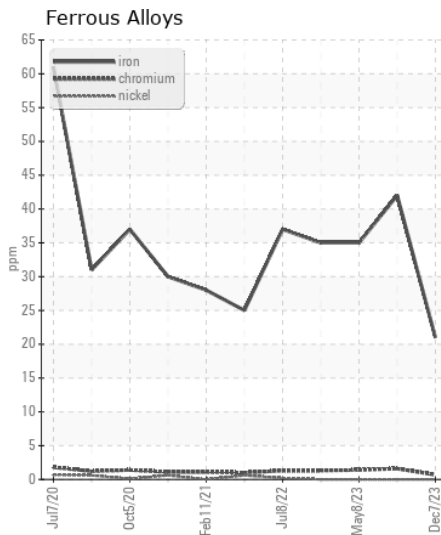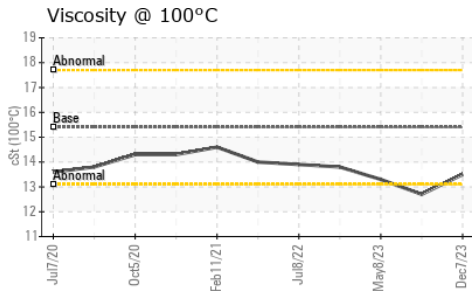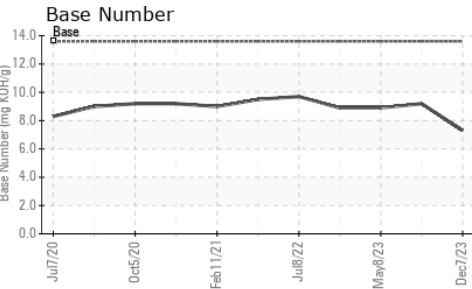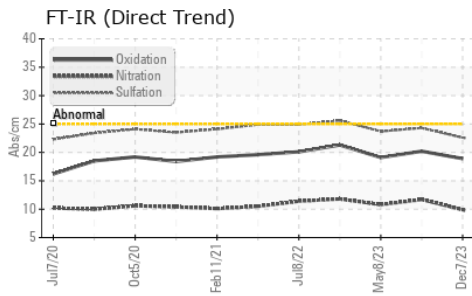

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0044471 **Received** : 14 Dec 2023
Lab Number : 06034459 **Tested** : 15 Dec 2023
Unique Number : 10789688 **Diagnosed** : 15 Dec 2023 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)