



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
A-321
 Component
Rear Differential
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0878681	---	---
Sample Date		Client Info		17 Dec 2023	---	---
Machine Age	hrs	Client Info		6879	---	---
Oil Age	hrs	Client Info		1908	---	---
Filter Age	hrs	Client Info		1908	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	14	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>100	2	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	5	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	LIGHT	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	---	---
Boron	ppm	ASTM D5185m	6	12	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	0	8	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	145	128	---	---
Calcium	ppm	ASTM D5185m	3570	3378	---	---
Phosphorus	ppm	ASTM D5185m	1290	1073	---	---
Zinc	ppm	ASTM D5185m	1640	1237	---	---
Sulfur	ppm	ASTM D5185m		3599	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	54.3	---	---

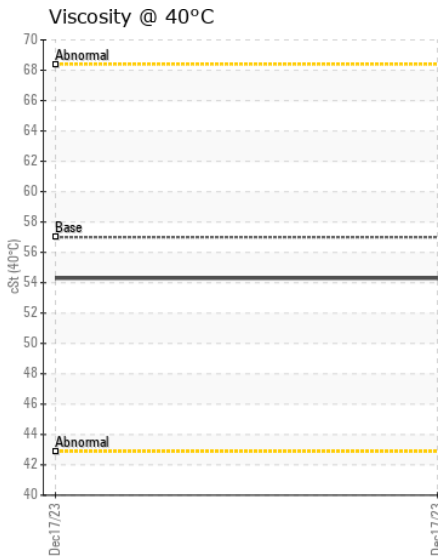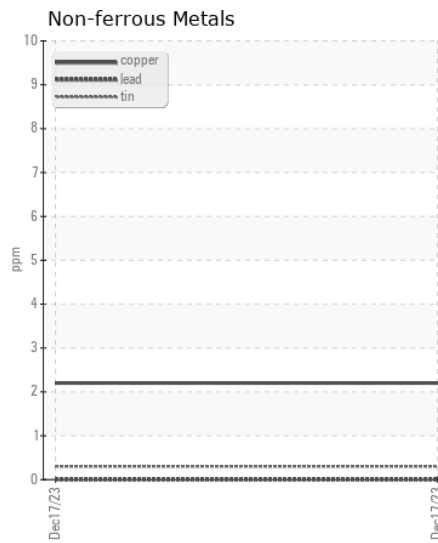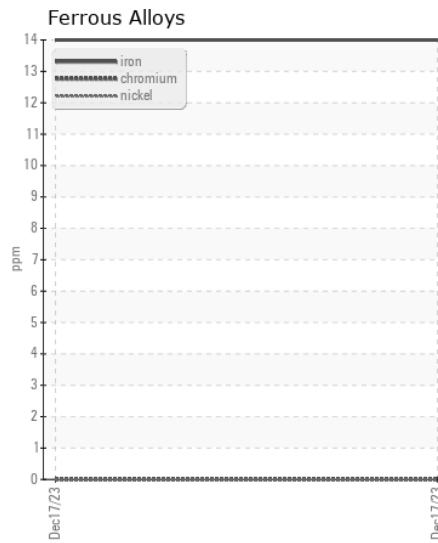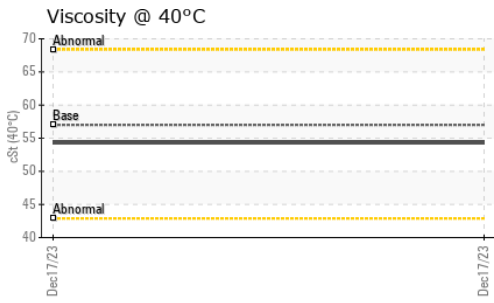

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0878681 **Received** : 26 Dec 2023
Lab Number : 06045246 **Diagnosed** : 28 Dec 2023
Unique Number : 10805854 **Diagnostician** : Sean Felton
Test Package : CONST

DUKE LAZZARA
 4201 FAYETTEVILLE RD
 RALEIGH, NC
 US 27603
 Contact: NICK DIXON
 NICK.DIXON@DUKELAZZAM.COM
 T: (919)760-7797
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)