



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**DEBORAH MILES**  
Component  
**Port Genset**  
Fluid  
**CHEVRON DELO 400 XLE 15W40 (5 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0058023</b>	MW0058009	MW0049321
Sample Date		Client Info		<b>27 Nov 2023</b>	17 Oct 2023	27 Jul 2023
Machine Age	hrs	Client Info		<b>34597</b>	34099	33119
Oil Age	hrs	Client Info		<b>498</b>	498	498
Filter Age	hrs	Client Info		<b>498</b>	498	498
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	None	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>5</b>	6	10
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>5</b>	7	11
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	1
Aluminum	ppm	ASTM D5185m	>12	<b>1</b>	3	<1
Lead	ppm	ASTM D5185m	>17	<b>&lt;1</b>	<1	3
Copper	ppm	ASTM D5185m	>70	<b>&lt;1</b>	<1	3
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>6</b>	5	9
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	3	4
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.1</b>	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.8</b>	8.5	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.1</b>	20.3	19.9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	2	6
Boron	ppm	ASTM D5185m		<b>317</b>	285	171
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>58</b>	60	64
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>342</b>	479	692
Calcium	ppm	ASTM D5185m		<b>2713</b>	2135	1517
Phosphorus	ppm	ASTM D5185m	760	<b>831</b>	844	687
Zinc	ppm	ASTM D5185m	830	<b>1058</b>	956	829
Sulfur	ppm	ASTM D5185m	2770	<b>3308</b>	3749	2896
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>12.4</b>	15.4	15.5
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	<b>8.5</b>	7.7	7.9
Visc @ 100°C	cSt	ASTM D445	14.9	<b>14.4</b>	14.4	14.1


**FT-IR (Direct Trend)**

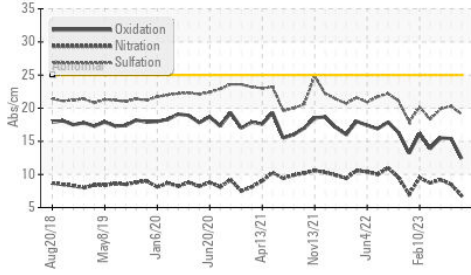


**Base Number**

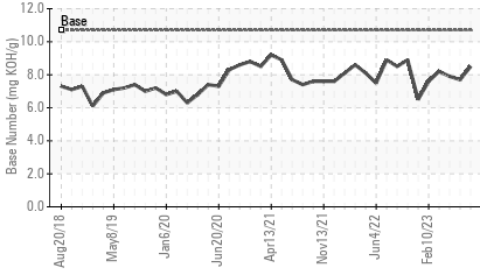


**Viscosity @ 100°C**

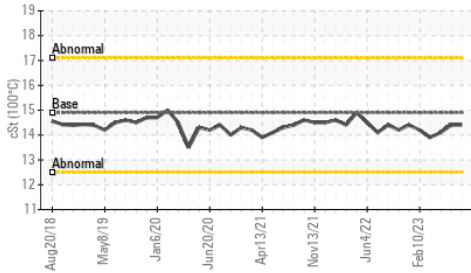


**Ferrous Alloys**

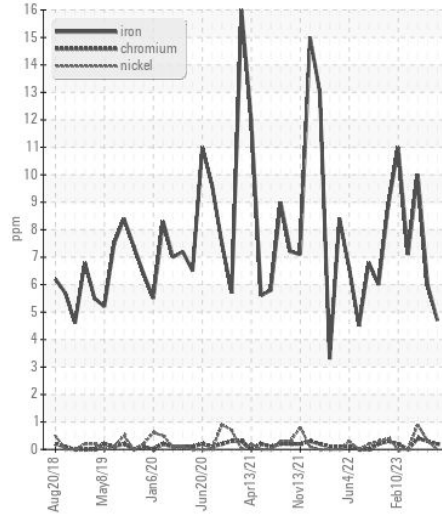


**Non-ferrous Metals**

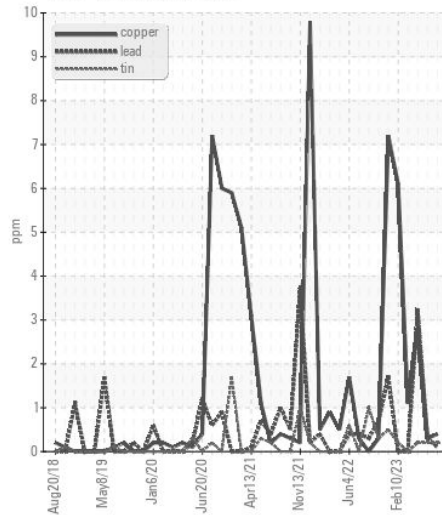

**Viscosity @ 100°C**

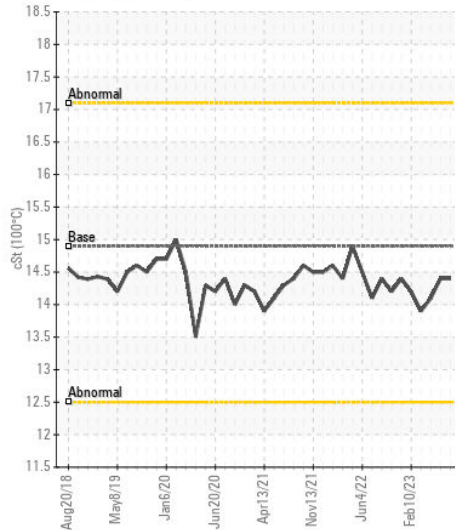

**Base Number**

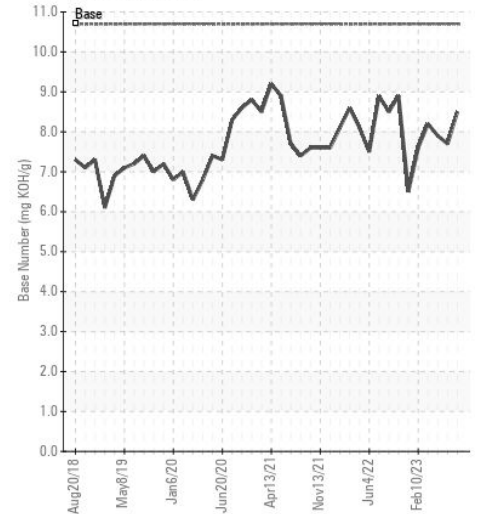

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0058023  
**Lab Number** : 06048195  
**Unique Number** : 10808803  
**Test Package** : MAR 2

**Received** : 29 Dec 2023  
**Tested** : 02 Jan 2024  
**Diagnosed** : 02 Jan 2024 - Don Baldrige

**MAGNOLIA MARINE TRANSPORT**  
 697 HAINING ROAD  
 VICKSBURG, MS  
 US 39183  
 Contact: MMT MAINTENANCE PLANNERS  
 mmtmaintenanceplanners@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:  
 F: (601)638-8028