



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 7760 1N07760XJB0035205

Component
Rear Differential

Fluid
GEAR OIL SAE 80W140 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W140. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0201867	---	---
Sample Date		Client Info		07 Jan 2024	---	---
Machine Age	hrs	Client Info		2250	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		206	---	---
Iron	ppm	ASTM D5185m	>500	315	---	---
Chromium	ppm	ASTM D5185m	>10	3	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	0	---	---
Lead	ppm	ASTM D5185m	>25	18	---	---
Copper	ppm	ASTM D5185m	>100	30	---	---
Tin	ppm	ASTM D5185m	>10	2	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	27	---	---
Potassium	ppm	ASTM D5185m	>20	10	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		12	---	---
Boron	ppm	ASTM D5185m	400	180	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	11	---	---
Manganese	ppm	ASTM D5185m		8	---	---
Magnesium	ppm	ASTM D5185m	12	2	---	---
Calcium	ppm	ASTM D5185m	150	26	---	---
Phosphorus	ppm	ASTM D5185m	1650	1011	---	---
Zinc	ppm	ASTM D5185m	125	18	---	---
Sulfur	ppm	ASTM D5185m	22500	27610	---	---
Visc @ 40°C	cSt	ASTM D445	263	270	---	---

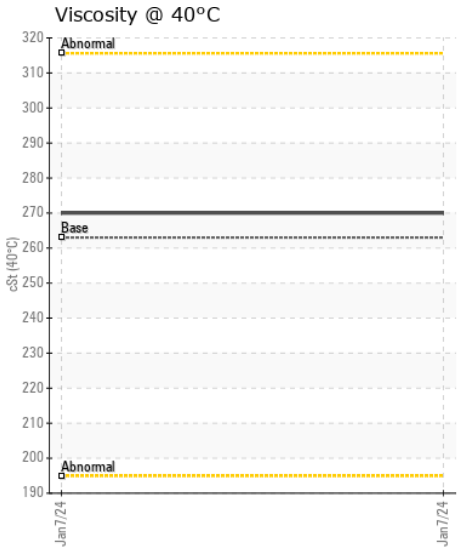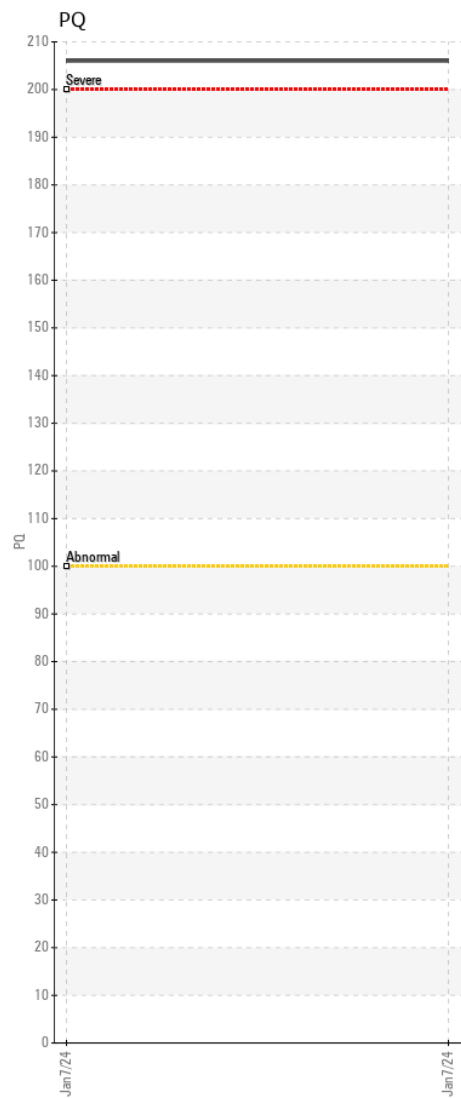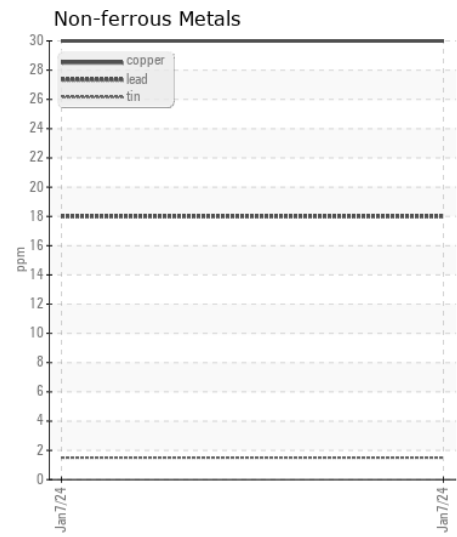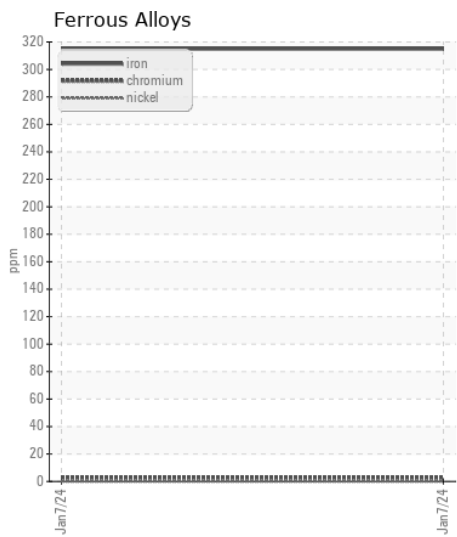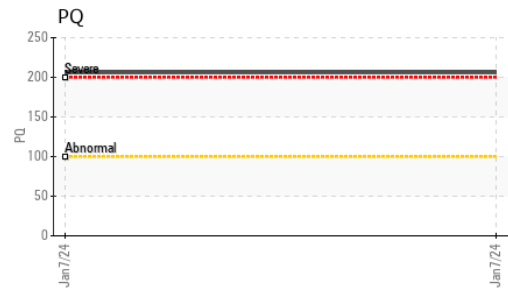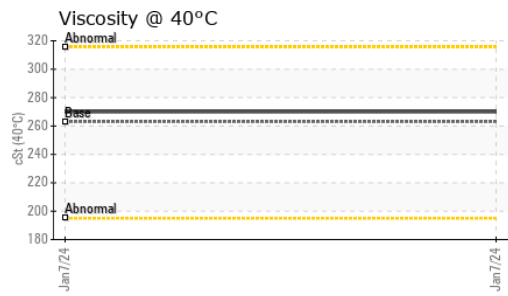

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0201867 **Recieved** : 08 Jan 2024
Lab Number : 06054267 **Diagnosed** : 09 Jan 2024
Unique Number : 10820216 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - WAKEFIELD
 10489 GENERAL MAHONE HWY
 WAKEFIELD, VA
 US 23888
 Contact: BILL ACKER
 backer@jamesriverequipment.com
 T: (757)899-3232
 F: (757)899-6464