



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[PRESTIGE SITEWORKS]
 Machine Id
JOHN DEERE 470 P 1FF470PAJPF000355
 Component
Left Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0192954	---	---
Sample Date		Client Info		30 Nov 2023	---	---
Machine Age	hrs	Client Info		468	---	---
Oil Age	hrs	Client Info		468	---	---
Filter Age	hrs	Client Info		468	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	55	---	---
Iron	ppm	ASTM D5185m	>750	135	---	---
Chromium	ppm	ASTM D5185m	>9	3	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>40	2	---	---
Lead	ppm	ASTM D5185m	>15	<1	---	---
Copper	ppm	ASTM D5185m	>40	<1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	8	---	---
Potassium	ppm	ASTM D5185m	>20	11	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	LIGHT	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	---	---
Boron	ppm	ASTM D5185m		51	---	---
Barium	ppm	ASTM D5185m		17	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		6	---	---
Magnesium	ppm	ASTM D5185m		1	---	---
Calcium	ppm	ASTM D5185m		8	---	---
Phosphorus	ppm	ASTM D5185m		523	---	---
Zinc	ppm	ASTM D5185m		17	---	---
Sulfur	ppm	ASTM D5185m		15487	---	---
Visc @ 40°C	cSt	ASTM D445		186	---	---

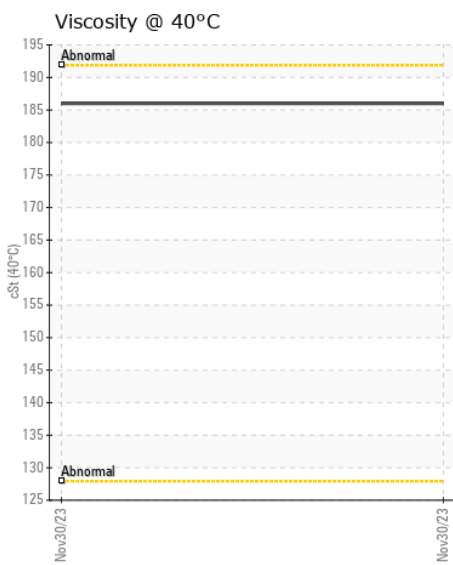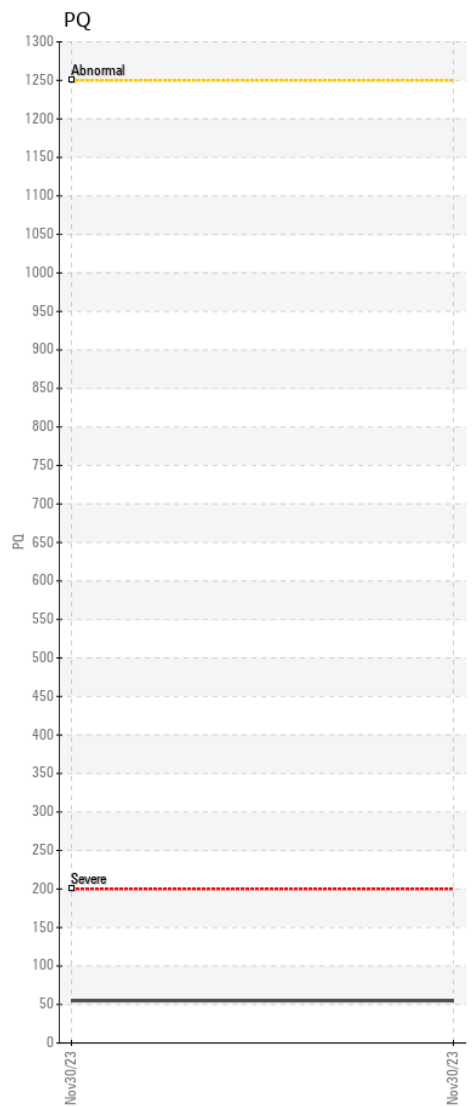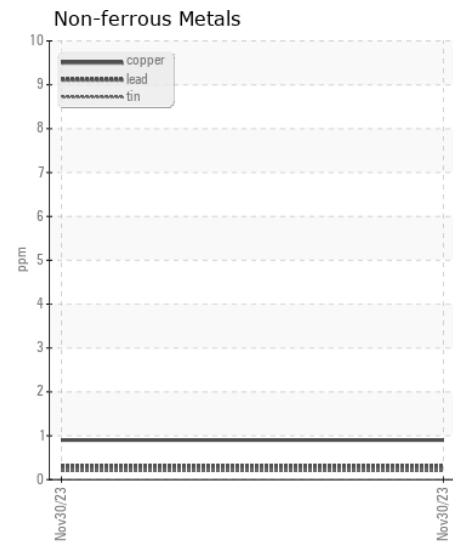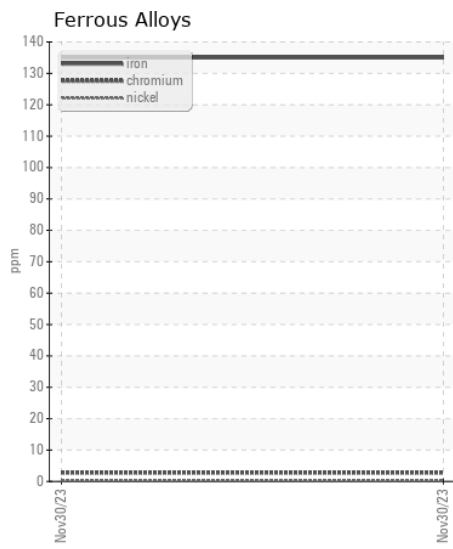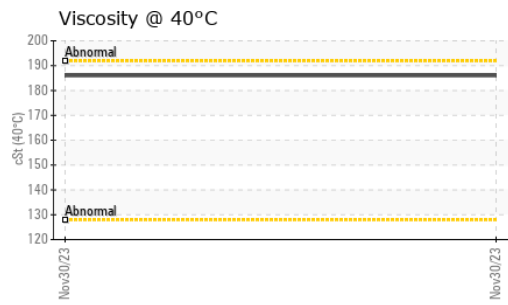

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0192954 **Received** : 08 Jan 2024
Lab Number : 06054294 **Diagnosed** : 09 Jan 2024
Unique Number : 10820243 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)