



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[SWO-068697]
Machine Id
VOLVO L150H 22611
Component
Rear Left Final Drive
Fluid
VOLVO WB 101 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP435640	---	---
Sample Date		Client Info		04 Jan 2024	---	---
Machine Age	hrs	Client Info		13655	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	73	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	<1	---	---
Copper	ppm	ASTM D5185m	>50	<1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	19	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	100	117	---	---
Barium	ppm	ASTM D5185m	0	7	---	---
Molybdenum	ppm	ASTM D5185m	0	5	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m	0	57	---	---
Calcium	ppm	ASTM D5185m	3800	3367	---	---
Phosphorus	ppm	ASTM D5185m	1200	1067	---	---
Zinc	ppm	ASTM D5185m	1500	1333	---	---
Sulfur	ppm	ASTM D5185m	6500	5852	---	---
Visc @ 40°C	cSt	ASTM D445	52.0	49.0	---	---

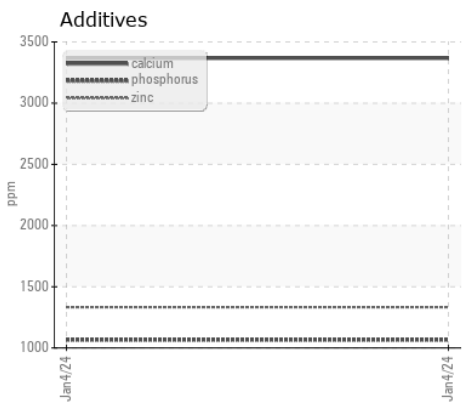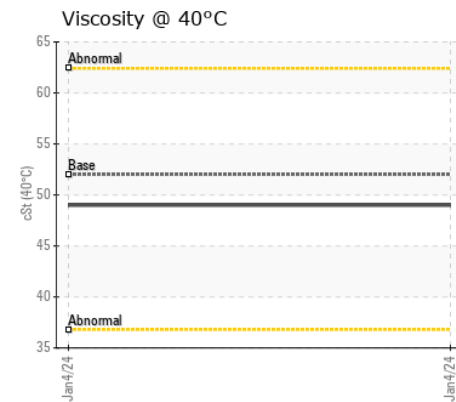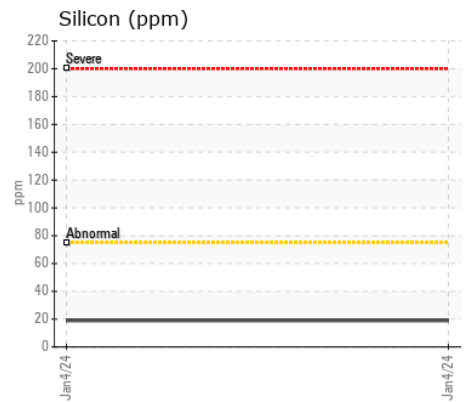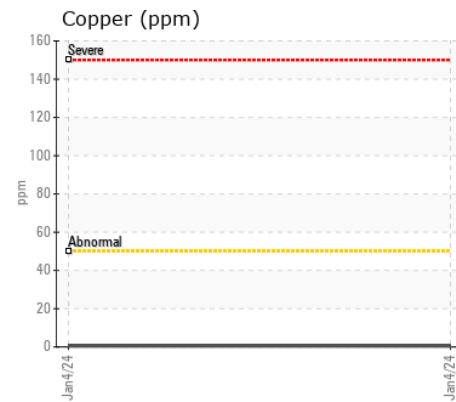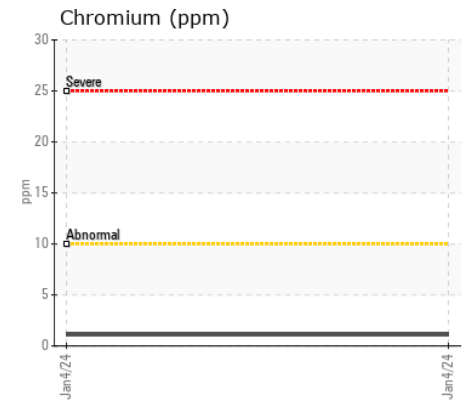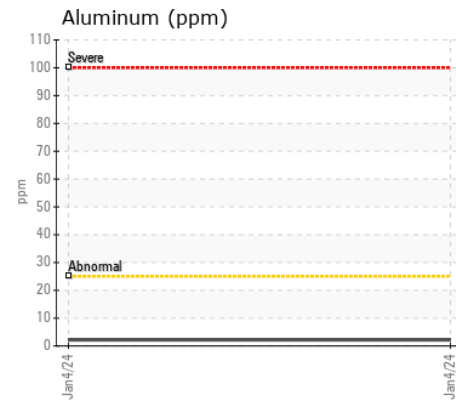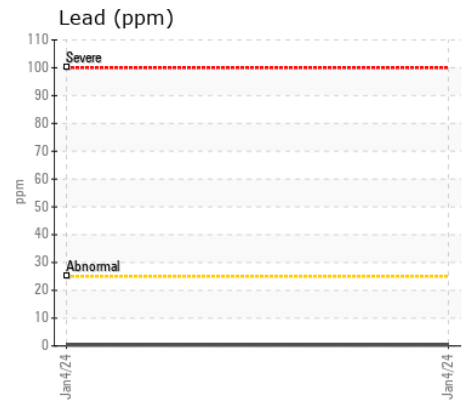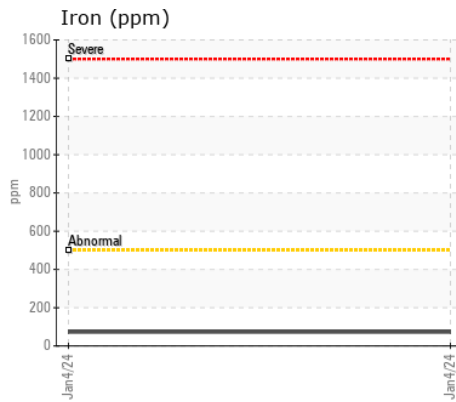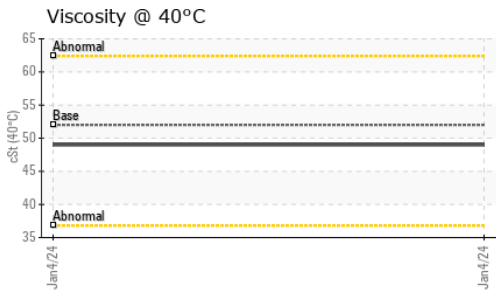

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP435640 **Received** : 08 Jan 2024
Lab Number : 06054331 **Diagnosed** : 09 Jan 2024
Unique Number : 10820280 **Diagnostician** : Wes Davis
Test Package : MOB 1

WHITAKER CONTRACTING
 692 CONVICT CAMP RD
 GUNTERSVILLE, AL
 US 35976

Contact: BROTHER WHITAKER
 BrotherWhitaker@whitaker-contracting.com

T: (256)298-3905

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)