



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LR636 018687-1275
Component
Diesel Engine
Fluid
LIEBHERR MOTOROIL 5W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0273230	LHMC100333	LHMC101256
Sample Date		Client Info		02 Jan 2024	14 Jun 2023	21 Dec 2022
Machine Age	hrs	Client Info		3251	2868	2276
Oil Age	hrs	Client Info		383	592	420
Filter Age	hrs	Client Info		383	592	420
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	37	6	12
Chromium	ppm	ASTM D5185m	>5	4	<1	<1
Nickel	ppm	ASTM D5185m	>5	2	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	<1	<1	0
Aluminum	ppm	ASTM D5185m	>15	3	2	2
Lead	ppm	ASTM D5185m	>30	<1	<1	8
Copper	ppm	ASTM D5185m	>125	4	8	32
Tin	ppm	ASTM D5185m	>5	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>60	8	8	9
Potassium	ppm	ASTM D5185m	>20	1	2	0
Fuel		WC Method	>5	<1.0	<1.0	1.8
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.6	10.4	13.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.3	21.3	20.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	3
Boron	ppm	ASTM D5185m	236	138	137	228
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	19	5	3
Manganese	ppm	ASTM D5185m	<1	<1	<1	<1
Magnesium	ppm	ASTM D5185m	25	514	813	85
Calcium	ppm	ASTM D5185m	4298	2485	1742	4189
Phosphorus	ppm	ASTM D5185m	1020	1131	875	979
Zinc	ppm	ASTM D5185m	1164	1282	1021	1204
Sulfur	ppm	ASTM D5185m	2460	3577	4352	3267
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.0	21.4	16.8
Base Number (BN)	mg KOH/g	ASTM D2896	14.88	5.0	7.4	13.9
Visc @ 100°C	cSt	ASTM D445	12.1	12.6	13.2	▲ 11.5

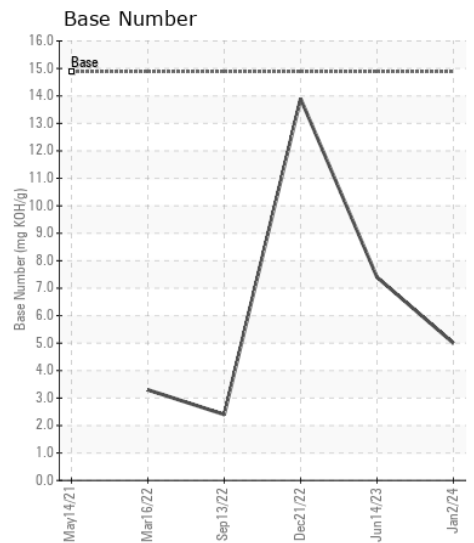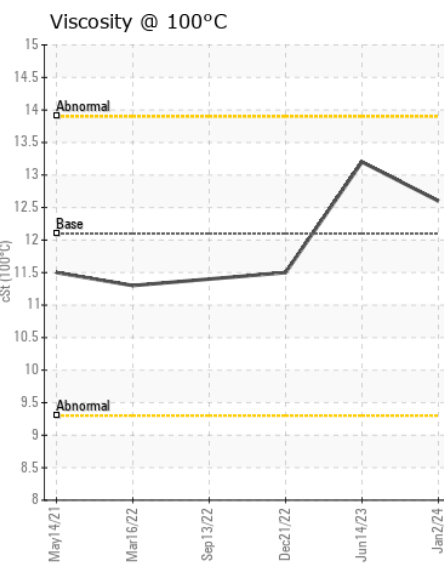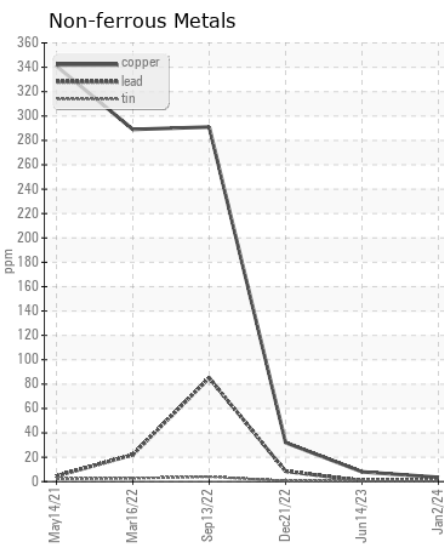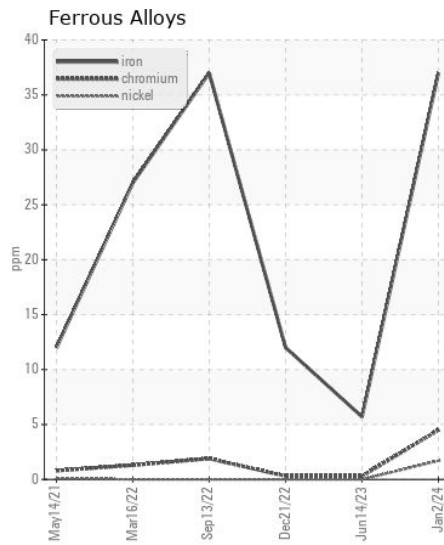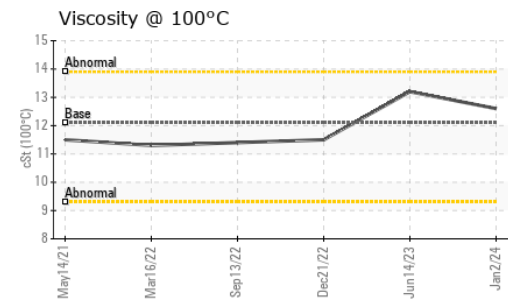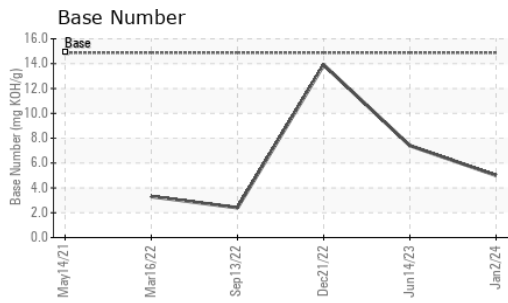

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0273230 **Received** : 08 Jan 2024
Lab Number : 06054563 **Diagnosed** : 10 Jan 2024
Unique Number : 10820512 **Diagnostician** : Sean Felton
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

RECO EQUIPMENT INC.
 20620 ROUTE 19 NORTH
 CRANBERRY TOWNSHIP, PA
 US 16066
 Contact: RICK STARINCHAK
 RAS@RECOEQUIP.COM
 T: (724)779-4646
 F: (724)779-4611