



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
CATERPILLAR LILLIAN LOUISE

Component
Port Main Engine

Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (62 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | MW0058033 | MW0058044 | MW0049187 |
| Sample Date | | Client Info | | 23 Dec 2023 | 07 Oct 2023 | 14 Sep 2023 |
| Machine Age | hrs | Client Info | | 0 | 44414 | 0 |
| Oil Age | hrs | Client Info | | 0 | 500 | 500 |
| Filter Age | hrs | Client Info | | 0 | 500 | 500 |
| Oil Changed | | Client Info | | N/A | Not Changd | Changed |
| Filter Changed | | Client Info | | N/A | Not Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >75 | 15 | 13 | 11 |
| Chromium | ppm | ASTM D5185m | >8 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >2 | <1 | <1 | 0 |
| Titanium | ppm | ASTM D5185m | >3 | 11 | 12 | 13 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >15 | 2 | 2 | 0 |
| Lead | ppm | ASTM D5185m | >18 | 3 | 1 | 2 |
| Copper | ppm | ASTM D5185m | >80 | 9 | 11 | 11 |
| Tin | ppm | ASTM D5185m | >14 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | <1 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >20 | 4 | 4 | 4 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 2 | 1 |
| Fuel | | WC Method | >4.0 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | | 0.3 | 0.3 | 0.3 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 9.3 | 9.7 | 10.1 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 21.3 | 21.0 | 21.1 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | >75 | 3 | 4 | 2 |
| Boron | ppm | ASTM D5185m | | 88 | 92 | 75 |
| Barium | ppm | ASTM D5185m | | 0 | 3 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 44 | 45 | 44 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | | 702 | 608 | 713 |
| Calcium | ppm | ASTM D5185m | | 1937 | 1664 | 1661 |
| Phosphorus | ppm | ASTM D5185m | 1360 | 875 | 684 | 718 |
| Zinc | ppm | ASTM D5185m | 1480 | 1019 | 790 | 862 |
| Sulfur | ppm | ASTM D5185m | | 3527 | 2724 | 3089 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 17.0 | 16.4 | 16.7 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 12.2 | 7.3 | 6.3 | 7.1 |
| Visc @ 100°C | cSt | ASTM D445 | 15.1 | 14.3 | 14.2 | 14.1 |

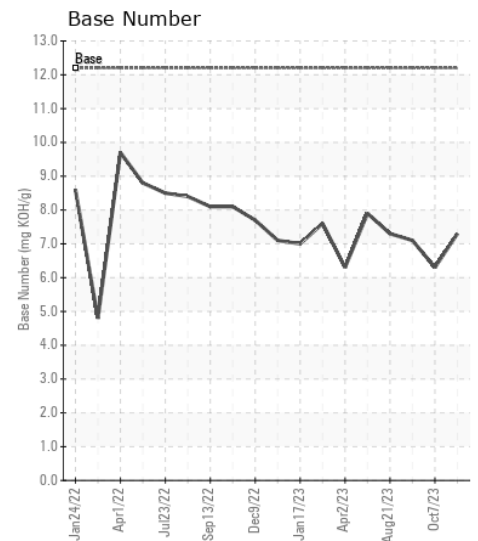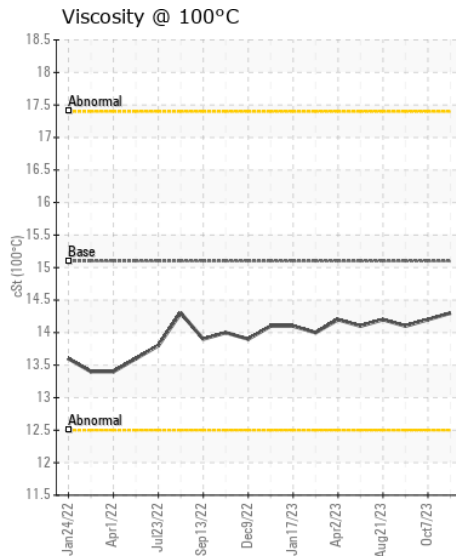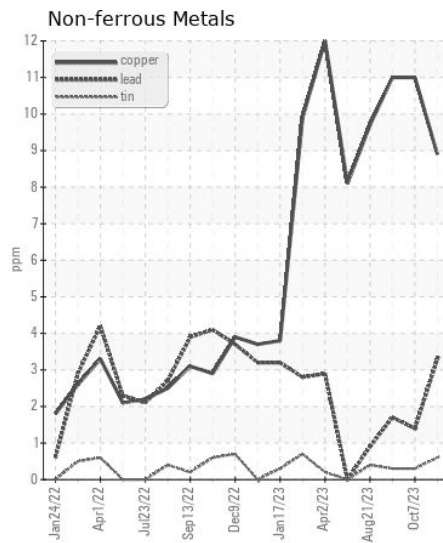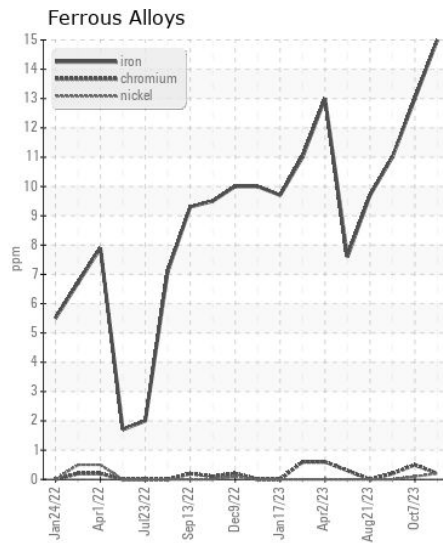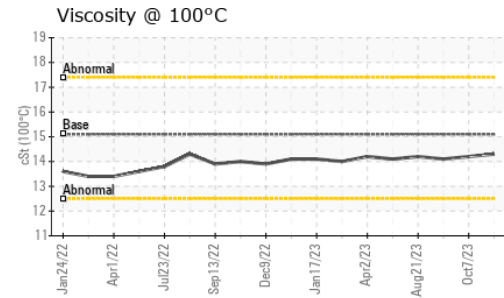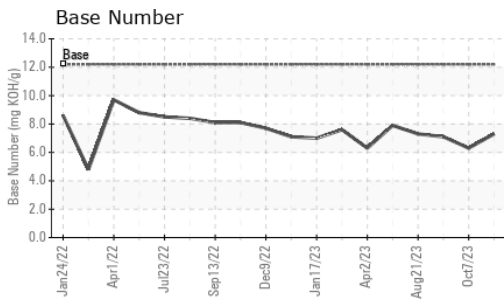

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0058033 **Received** : 08 Jan 2024
Lab Number : 06054590 **Diagnosed** : 09 Jan 2024
Unique Number : 10820539 **Diagnostician** : Wes Davis
Test Package : MAR 2

MAGNOLIA MARINE TRANSPORT
 697 HAINING ROAD
 VICKSBURG, MS
 US 39183

Contact: MMT MAINTENANCE PLANNERS
 mmtmaintenanceplanners@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:
 F: (601)638-8028