



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
3634C
 Component
Natural Gas Engine
 Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0092739	GFL0072384	GFL0072337
Sample Date		Client Info		29 Dec 2023	26 Jul 2023	09 May 2023
Machine Age	hrs	Client Info		20287	20287	20287
Oil Age	hrs	Client Info		533	697	20287
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Not Changd
Filter Changed		Client Info		Changed	Changed	Not Changd
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	3	18	15
Chromium	ppm	ASTM D5185m	>4	<1	3	<1
Nickel	ppm	ASTM D5185m	>2	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>9	2	3	2
Lead	ppm	ASTM D5185m	>30	<1	12	<1
Copper	ppm	ASTM D5185m	>35	<1	▲ 40	<1
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>+100	4	17	10
Potassium	ppm	ASTM D5185m	>20	2	3	1
Water		WC Method	>0.1	NEG	NEG	NEG
Soot %	%	*ASTM D7844		0	0	0
Nitration	Abs/cm	*ASTM D7624	>20	6.6	8.8	7.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.5	22.8	18.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	53	4
Boron	ppm	ASTM D5185m	50	56	10	29
Barium	ppm	ASTM D5185m	5	0	0	3
Molybdenum	ppm	ASTM D5185m	50	66	53	63
Manganese	ppm	ASTM D5185m	0	<1	1	2
Magnesium	ppm	ASTM D5185m	560	289	799	663
Calcium	ppm	ASTM D5185m	1510	1760	1098	1648
Phosphorus	ppm	ASTM D5185m	780	779	668	950
Zinc	ppm	ASTM D5185m	870	1057	871	1103
Sulfur	ppm	ASTM D5185m	2040	3295	2916	2805
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.7	14.0	15.5
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	8.2	4.2	8.1
Visc @ 100°C	cSt	ASTM D445	15.1	14.1	▲ 11.1	14.1

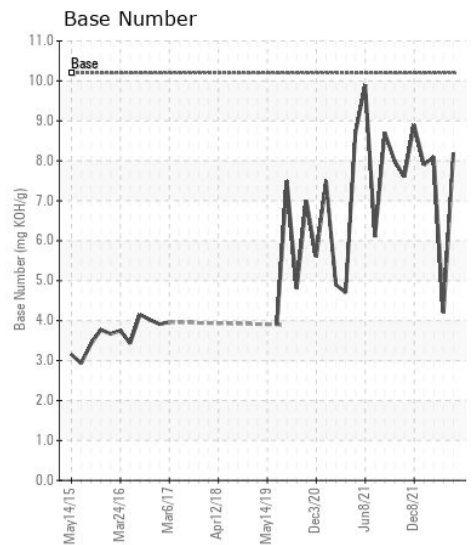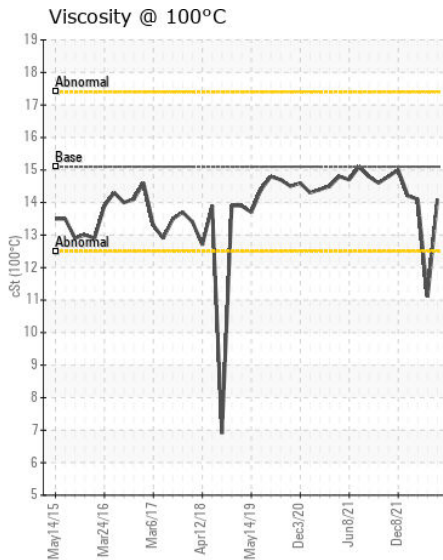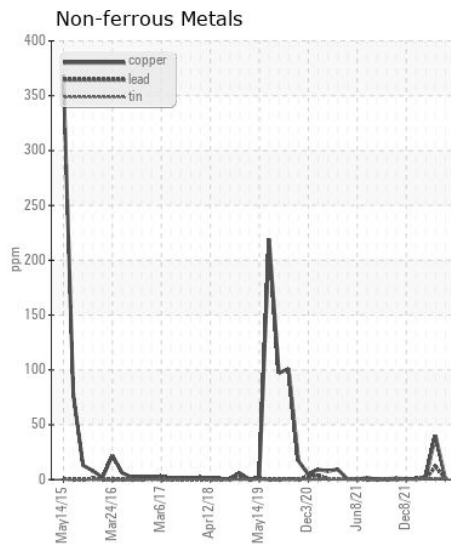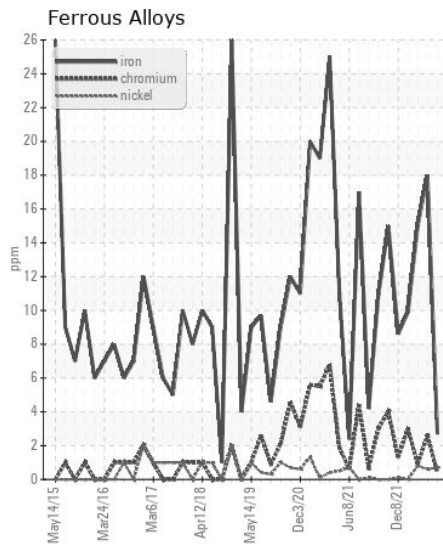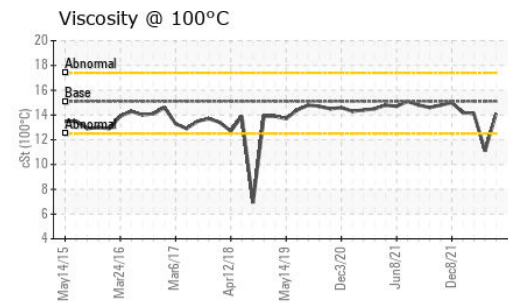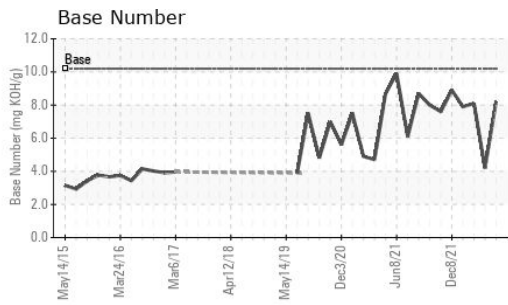

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0092739 **Received** : 09 Jan 2024
Lab Number : 06055217 **Diagnosed** : 10 Jan 2024
Unique Number : 10821166 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 005 - Wilson/Tri-East(CNG)
 2810 Contentnea Road S
 Wilson, NC
 US 27893-8501
 Contact: SPENCER LIGGON
 spencer.liggon@gflenv.com
 T: (800)207-6618
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)