



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[16W15207]
 Machine Id
JOHN DEERE 544 P 1DW544PAJNLZ15235
 Component
Transmission (Manual)
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (23 QTS)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 16W15207)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0196207	JR0185293	JR0173582
Sample Date		Client Info		22 Dec 2023	28 Sep 2023	20 Jun 2023
Machine Age	hrs	Client Info		2500	2055	1537
Oil Age	hrs	Client Info		445	2055	0
Filter Age	hrs	Client Info		445	2055	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Not Changed	Changed	Not Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	20	21	20
Iron	ppm	ASTM D5185m	>200	16	31	25
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>7	<1	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	6	2
Lead	ppm	ASTM D5185m	>45	<1	<1	0
Copper	ppm	ASTM D5185m	>225	4	8	6
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the fluid.


Silicon	ppm	ASTM D5185m	>125	42	▲ 83	▲ 79
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		7	17	17
Boron	ppm	ASTM D5185m	6	<1	0	6
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	3	2
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	145	89	94	86
Calcium	ppm	ASTM D5185m	3570	3122	3168	3142
Phosphorus	ppm	ASTM D5185m	1290	983	1009	950
Zinc	ppm	ASTM D5185m	1640	1201	1262	1200
Sulfur	ppm	ASTM D5185m		3313	3523	3960
Visc @ 40°C	cSt	ASTM D445	57.0	49.8	45.9	46.2


Viscosity @ 40°C

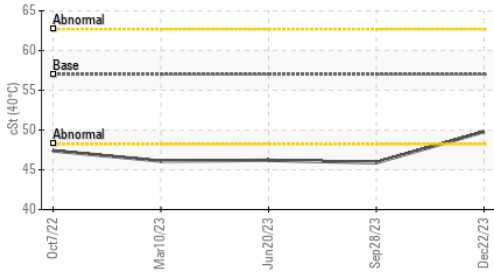


PQ

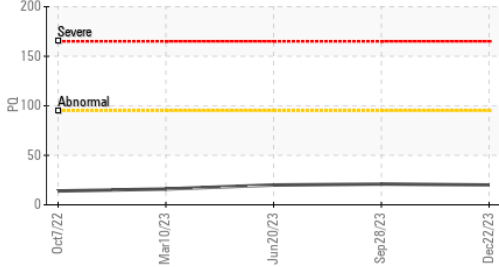


Ferrous Alloys

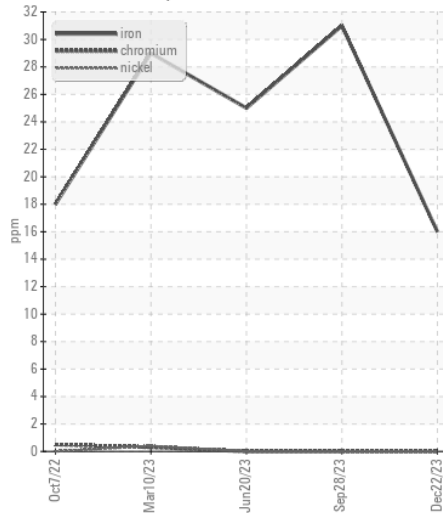


PQ

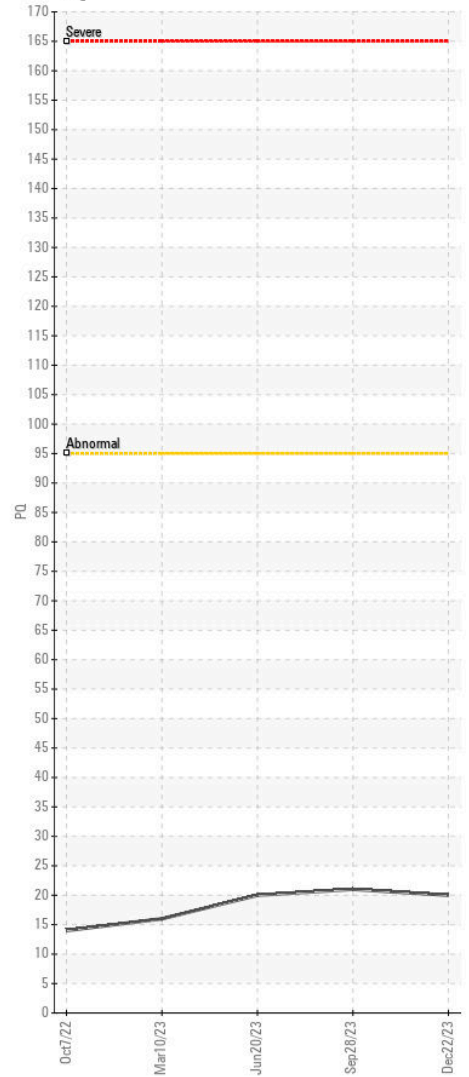

Non-ferrous Metals

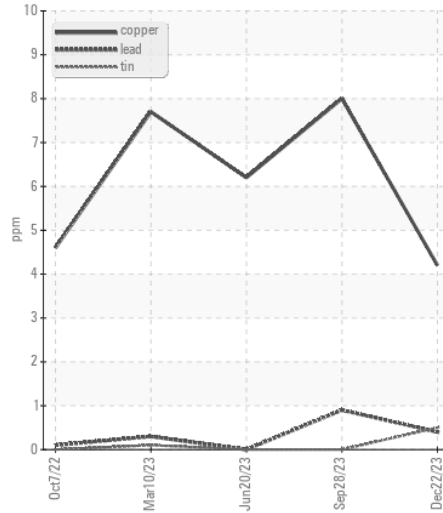

Viscosity @ 40°C

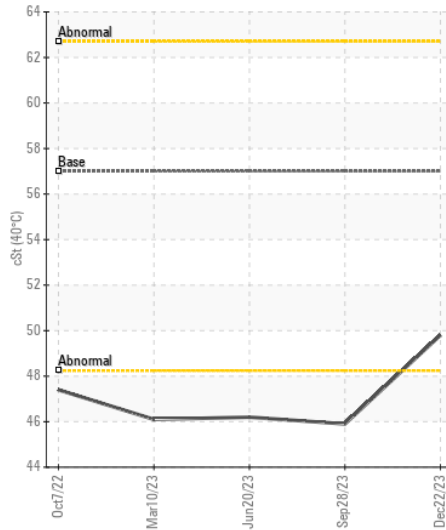

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0196207 **Received** : 09 Jan 2024
Lab Number : 06055552 **Diagnosed** : 10 Jan 2024
Unique Number : 10821501 **Diagnostician** : Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529

Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)614-2260
 F: (919)779-5432