



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
5389 VOLVO L150H 5389

Component
Diesel Engine

Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DJJ0009443	DJJ0009118	DJJ05286742
Sample Date		Client Info		29 Dec 2023	13 Jan 2022	22 Jun 2021
Machine Age	hrs	Client Info		14865	9460	8665
Oil Age	hrs	Client Info		250	400	0
Filter Age	hrs	Client Info		250	400	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<1	6	7
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>10	2	2	1
Lead	ppm	ASTM D5185m	>20	0	<1	<1
Copper	ppm	ASTM D5185m	>15	0	<1	<1
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	2	4	4
Potassium	ppm	ASTM D5185m	>20	1	3	<1
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	5.7	7.7	7.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.2	20.0	22.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	6	2
Boron	ppm	ASTM D5185m	2.5	24	127	48
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.7	60	20	34
Manganese	ppm	ASTM D5185m	0.0	0	<1	<1
Magnesium	ppm	ASTM D5185m	256	816	673	539
Calcium	ppm	ASTM D5185m	2057	1112	1441	1673
Phosphorus	ppm	ASTM D5185m	935	982	958	964
Zinc	ppm	ASTM D5185m	1223	1138	1041	1131
Sulfur	ppm	ASTM D5185m	4079	3446	3172	2794
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.7	13.2	19.6
Base Number (BN)	mg KOH/g	ASTM D2896	10	8.4	9.0	---
Visc @ 100°C	cSt	ASTM D445	15.0	13.0	12.9	12.2

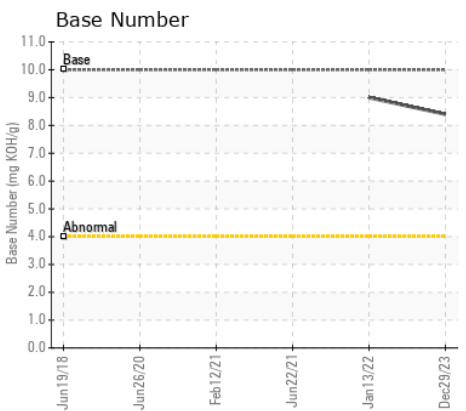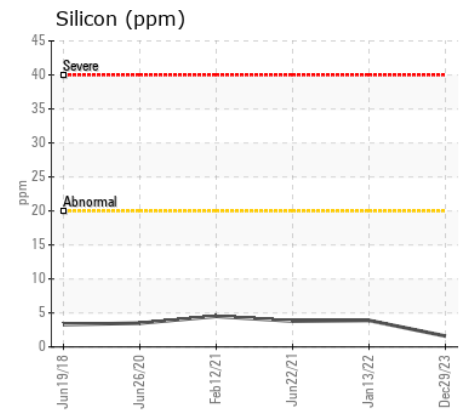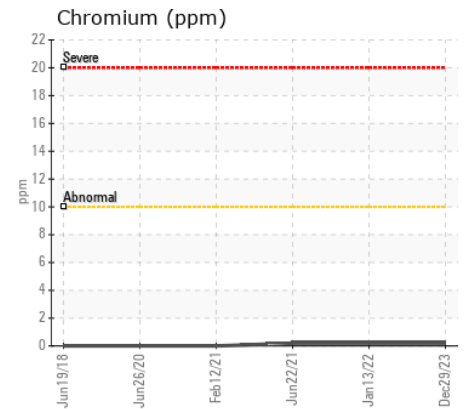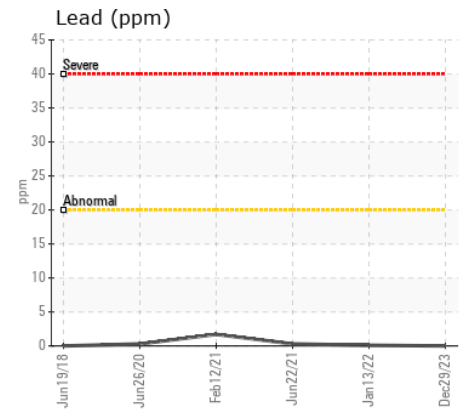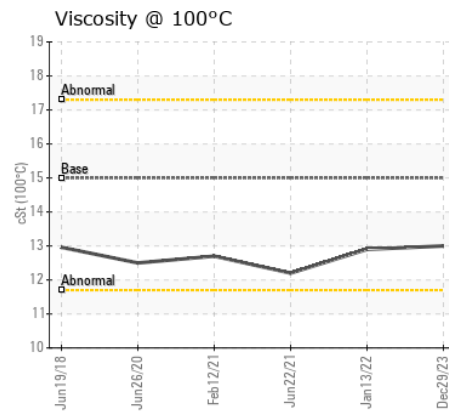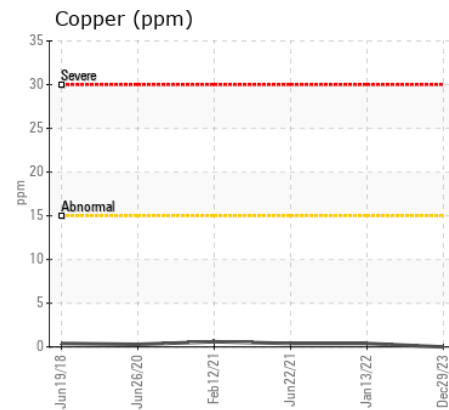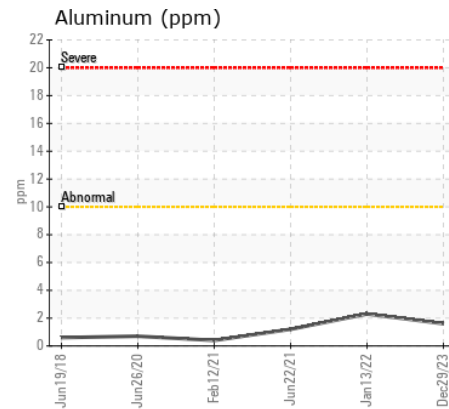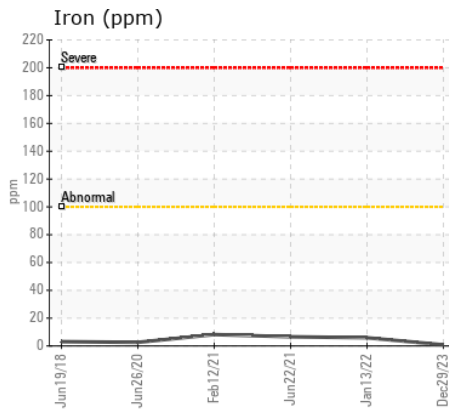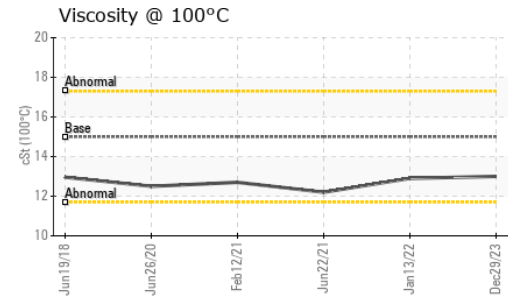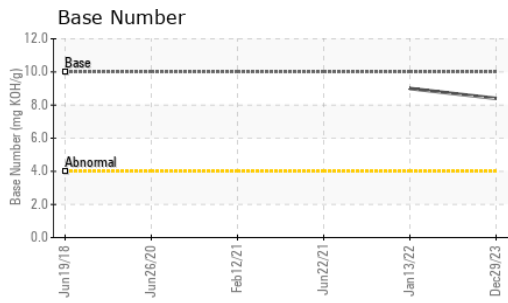

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DJJ0009443 **Received** : 09 Jan 2024
Lab Number : 06055744 **Diagnosed** : 10 Jan 2024
Unique Number : 10821693 **Diagnostician** : Sean Felton
Test Package : MOBCE (Additional Tests: TBN)

WESTERN METALS RECYCLING - SALT LAKE CITY
 4221 WEST 700 SOUTH
 SALT LAKE CITY, UT
 US 84104
 Contact: TIMOTHY SHEFFIELD
 timothy.sheffield@wmrecycling.com
 T: (801)373-4225
 F: (801)975-9590

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)