



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[44078]**  
Machine Id  
**SAKAI 3SV59-60153**

Component  
**Front Drum Gearbox**  
Fluid  
**JOHN DEERE GL-5 85W140LS (2 QTS)**

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0199294</b>	---	---
Sample Date		Client Info		<b>29 Dec 2023</b>	---	---
Machine Age	hrs	Client Info		<b>991</b>	---	---
Oil Age	hrs	Client Info		<b>991</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>301</b>	---	---
Iron	ppm	ASTM D5185m	>200	<b>185</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m		<b>0</b>	---	---
Lead	ppm	ASTM D5185m		<b>0</b>	---	---
Copper	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION







Moderate concentration of visible dirt/debris present in the oil.

Silicon	ppm	ASTM D5185m		<b>4</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>▲ MODER</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

### FLUID CONDITION

Confirm oil type. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>13</b>	---	---
Boron	ppm	ASTM D5185m		<b>192</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>2</b>	---	---
Manganese	ppm	ASTM D5185m		<b>3</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>57</b>	---	---
Calcium	ppm	ASTM D5185m		<b>124</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>1057</b>	---	---
Zinc	ppm	ASTM D5185m		<b>133</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>17663</b>	---	---
Visc @ 40°C	cSt	ASTM D445	350.7	<b>129</b>	---	---

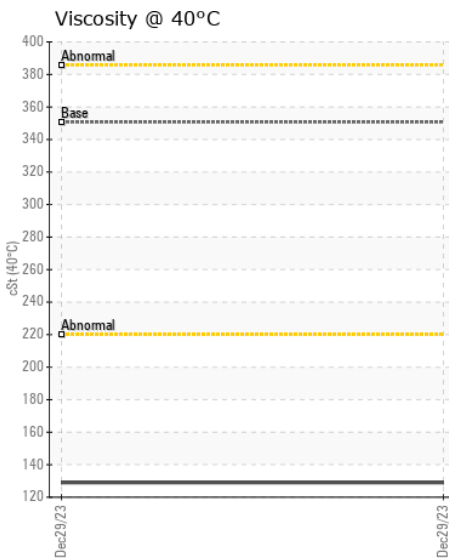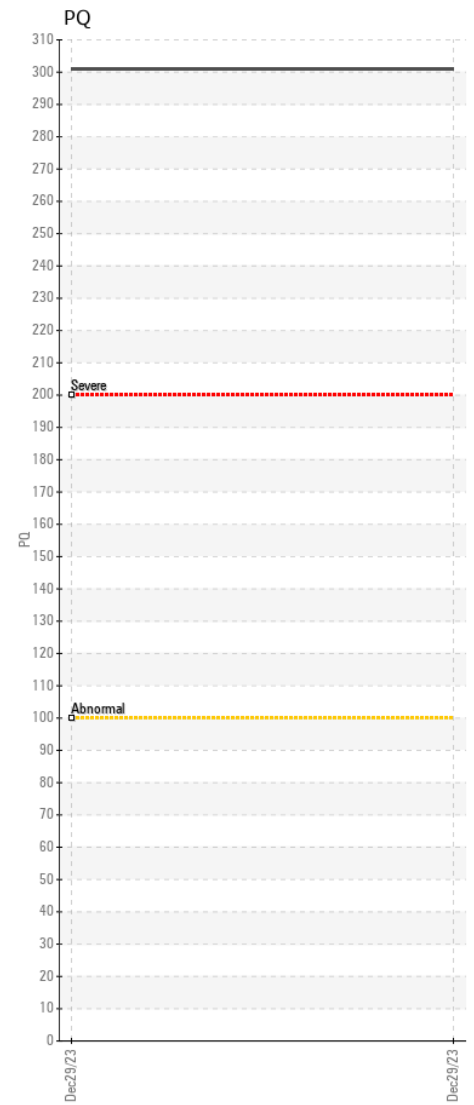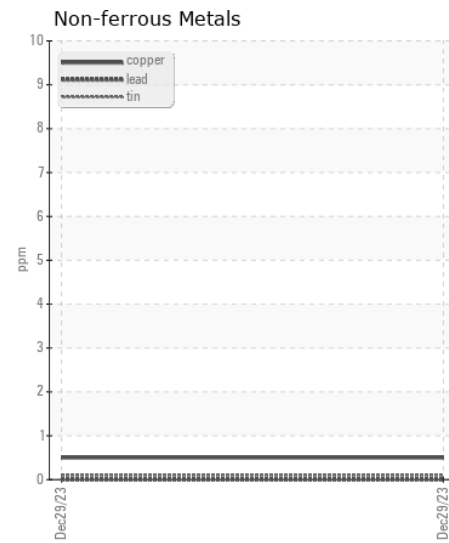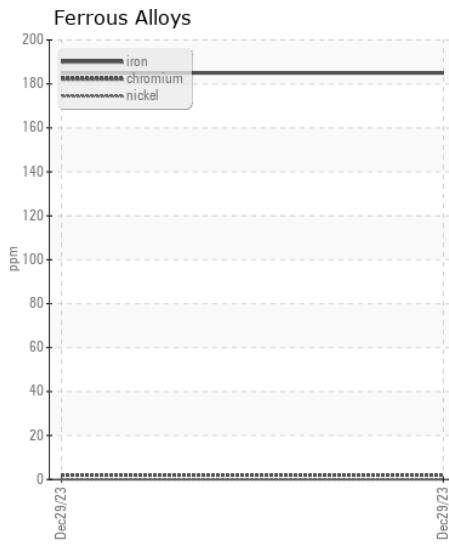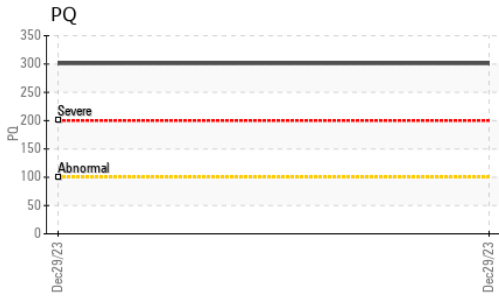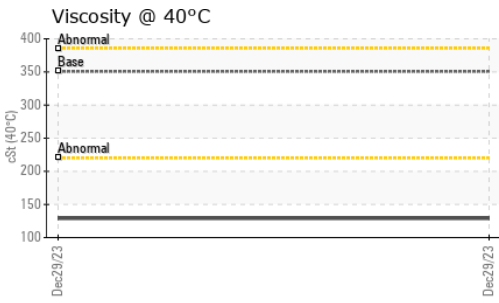

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0199294 **Recieved** : 09 Jan 2024  
**Lab Number** : 06056042 **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10821991 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - MANASSAS PARK**  
 9107 OWENS DRIVE  
 MANASSAS PARK, VA  
 US 20111

Contact: TECHNICIAN ACCOUNT  
 catherine.anastasio@wearcheck.com

T:  
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)