



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W15287]
 Machine Id
JOHN DEERE 350GLC 5013844 (S/N 1Ff350GCXCMF815151)
 Component
Right Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (3 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W15287)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0196372	---	---
Sample Date		Client Info		08 Jan 2024	---	---
Machine Age	hrs	Client Info		2485	---	---
Oil Age	hrs	Client Info		485	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	80	---	---
Iron	ppm	ASTM D5185m	>750	281	---	---
Chromium	ppm	ASTM D5185m	>9	4	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	1	---	---
Lead	ppm	ASTM D5185m	>15	0	---	---
Copper	ppm	ASTM D5185m	>40	<1	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	13	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<1	---	---
Boron	ppm	ASTM D5185m		39	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m		3	---	---
Calcium	ppm	ASTM D5185m		20	---	---
Phosphorus	ppm	ASTM D5185m		552	---	---
Zinc	ppm	ASTM D5185m		6	---	---
Sulfur	ppm	ASTM D5185m		18419	---	---
Visc @ 40°C	cSt	ASTM D445		147	---	---

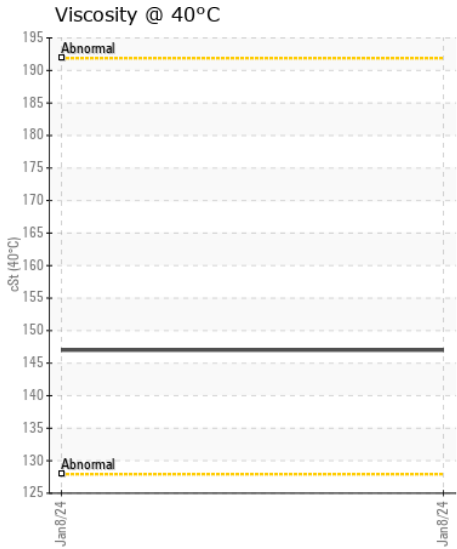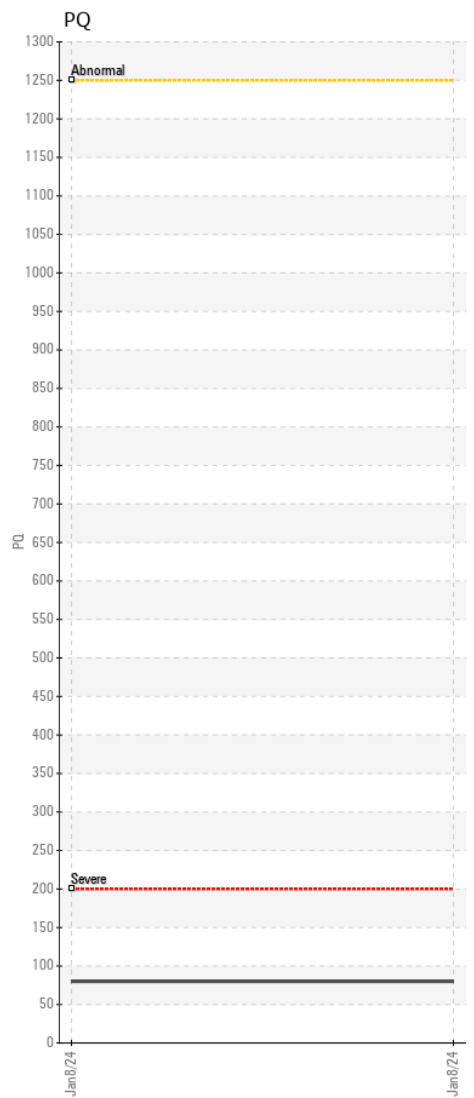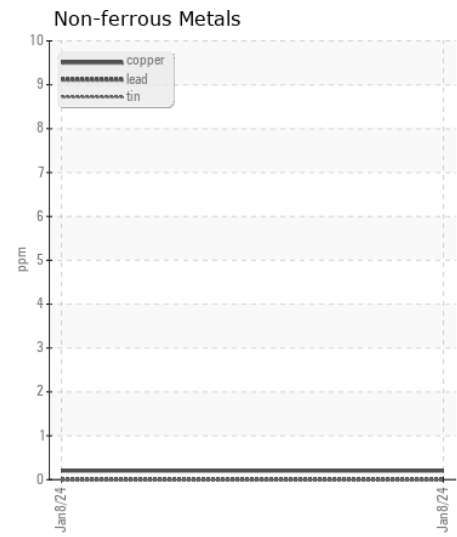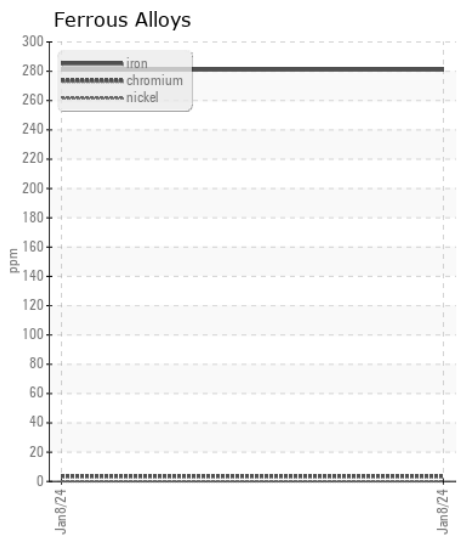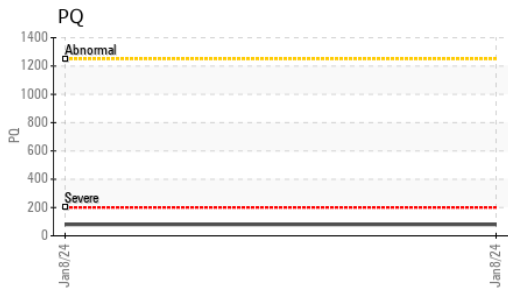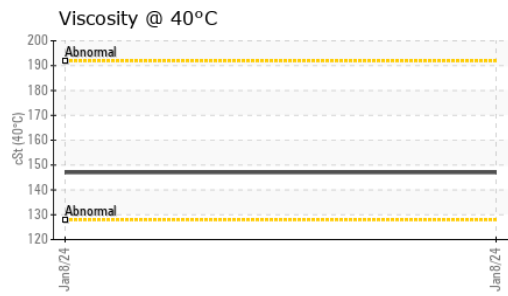

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0196372 **Received** : 09 Jan 2024
Lab Number : 06056070 **Diagnosed** : 10 Jan 2024
Unique Number : 10822019 **Diagnostician** : Angela Borella
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CASTLE HAYNE
 113 CROWATAN ROAD
 CASTLE HAYNE, NC
 US 28429-5819
 Contact: WILMINGTON SHOP
 todd.simmons@jamesriverequipment.com; canastasio@wearcheck.com; canastasio@we
 T: (910)675-9211
 F: