



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
857-4739

Component
Diesel Engine

Fluid
MOBIL DELVAC 1300 SUPER 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0010911	RPL0010183	RPL0005721
Sample Date		Client Info		14 Dec 2023	16 Jun 2023	26 Oct 2022
Machine Age	mls	Client Info		123118	93739	59448
Oil Age	mls	Client Info		29379	34291	39222
Filter Age	mls	Client Info		29379	34291	39222
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	36	▲ 133	59
Chromium	ppm	ASTM D5185m	>20	<1	4	2
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	11	42	30
Lead	ppm	ASTM D5185m	>40	2	6	4
Copper	ppm	ASTM D5185m	>330	2	16	12
Tin	ppm	ASTM D5185m	>15	0	4	2
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	10	18	15
Potassium	ppm	ASTM D5185m	>20	40	143	88
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	2	0.5
Nitration	Abs/cm	*ASTM D7624	>20	11.0	14.1	12.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.8	30.4	29.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	6	4
Boron	ppm	ASTM D5185m		17	20	12
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		18	15	12
Manganese	ppm	ASTM D5185m		0	3	2
Magnesium	ppm	ASTM D5185m		762	812	681
Calcium	ppm	ASTM D5185m		1424	1632	1371
Phosphorus	ppm	ASTM D5185m		758	774	692
Zinc	ppm	ASTM D5185m		877	953	858
Sulfur	ppm	ASTM D5185m		2978	3506	3020
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.8	27.2	25.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	4.9	5.0	4.7
Visc @ 100°C	cSt	ASTM D445	11.9	11.3	12.7	11.5

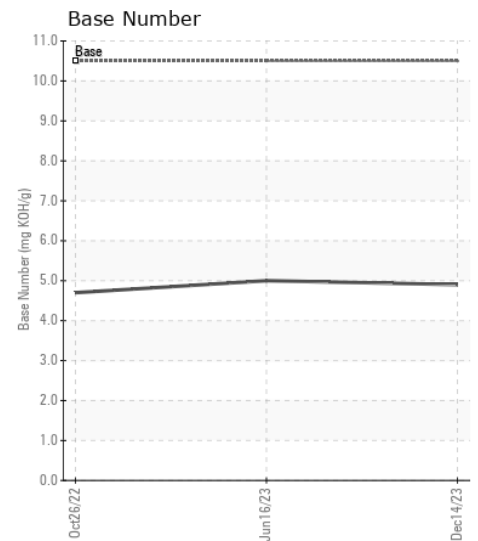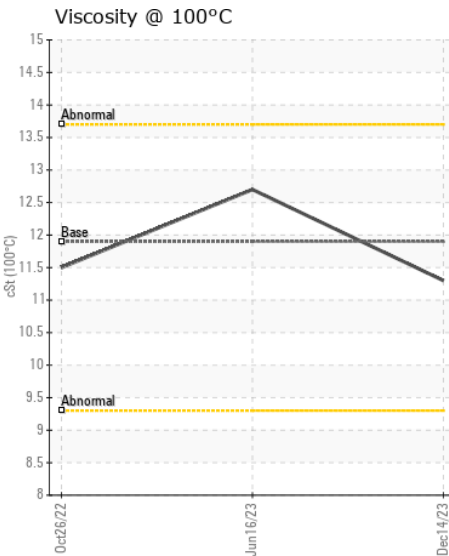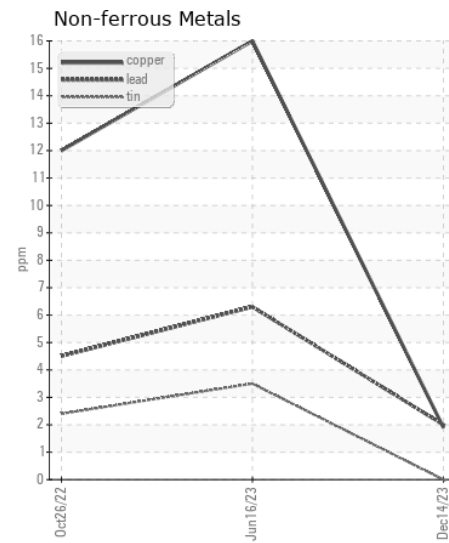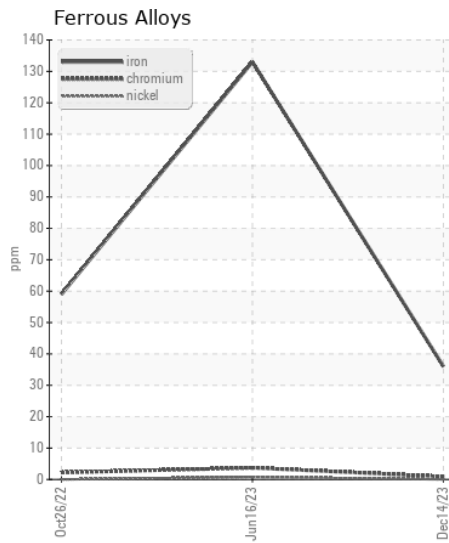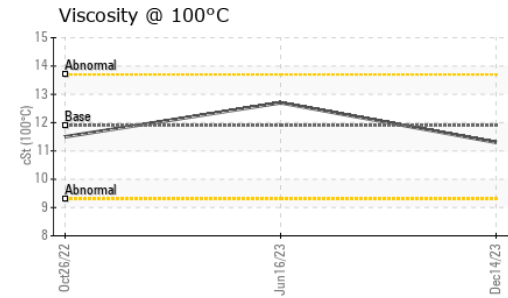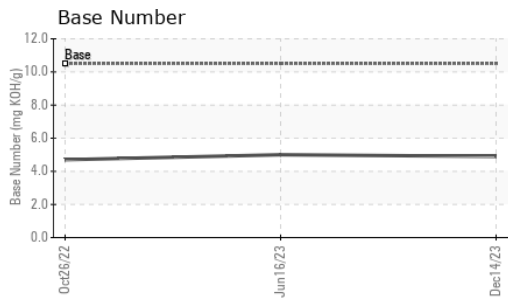

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0010911 **Received** : 10 Jan 2024
Lab Number : 06056205 **Diagnosed** : 11 Jan 2024
Unique Number : 10822154 **Diagnostician** : Wes Davis
Test Package : FLEET

RTL PACLEASE - 7001 - Houston
 6300 N. Loop East
 Houston, TX
 US 77026

Contact: RODNEY BRIGGS
 briggsr@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: