



PacLease

# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**857-4880**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 SAE 10W30 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0013973</b>	RPL0010815	RPL0004869
Sample Date		Client Info		<b>28 Dec 2023</b>	18 Sep 2023	19 Oct 2022
Machine Age	hrs	Client Info		<b>3364</b>	2916	21861
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>17</b>	6	63
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	3
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>6</b>	5	67
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	2
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	<1	23
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	3
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>7</b>	5	42
Potassium	ppm	ASTM D5185m	>20	<b>15</b>	10	169
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.8</b>	0.4	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.9</b>	7.8	11.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.9</b>	22.2	24.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	1	4
Boron	ppm	ASTM D5185m		<b>28</b>	40	25
Barium	ppm	ASTM D5185m		<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m		<b>42</b>	40	21
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	5
Magnesium	ppm	ASTM D5185m		<b>550</b>	534	739
Calcium	ppm	ASTM D5185m		<b>1674</b>	1552	1415
Phosphorus	ppm	ASTM D5185m	1260	<b>754</b>	768	661
Zinc	ppm	ASTM D5185m	1400	<b>939</b>	902	876
Sulfur	ppm	ASTM D5185m		<b>2603</b>	2485	2936
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>22.0</b>	19.7	21.7
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>7.9</b>	9.3	6.3
Visc @ 100°C	cSt	ASTM D445	11.1	<b>11.4</b>	11.1	11.7

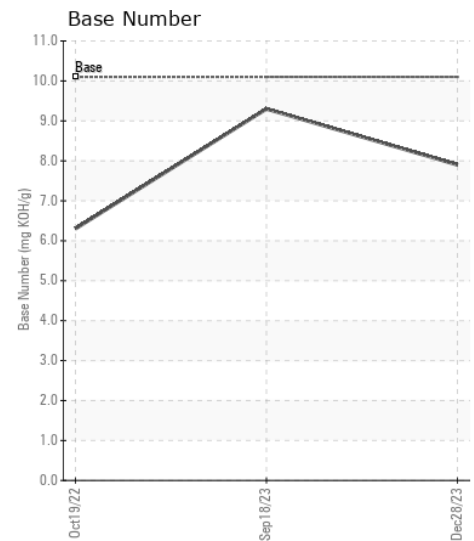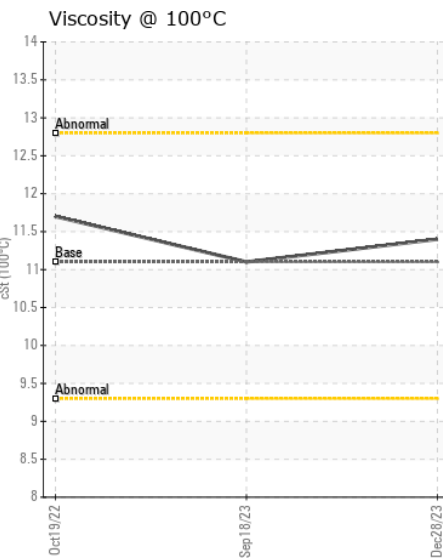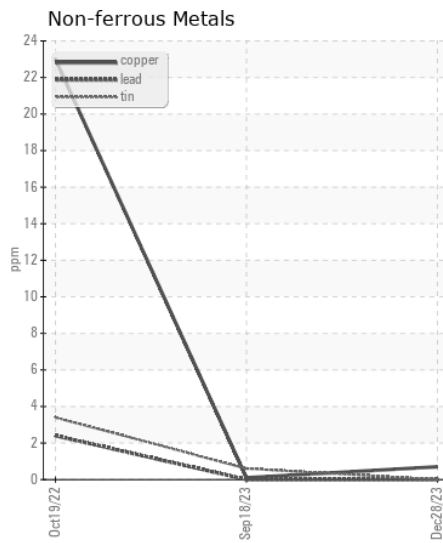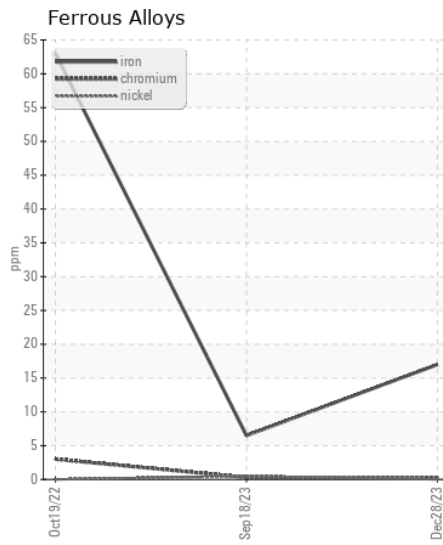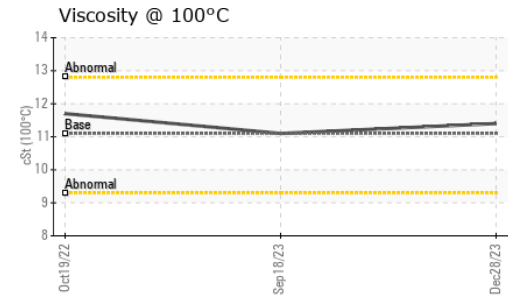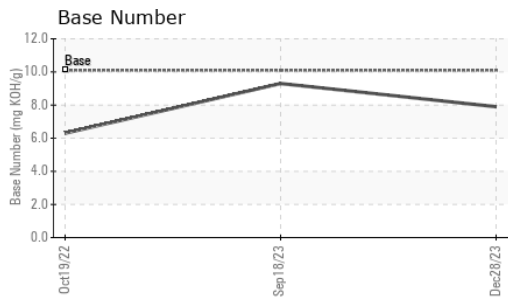

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0013973 **Received** : 10 Jan 2024  
**Lab Number** : 06056251 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10822200 **Diagnostician** : Angela Borella  
**Test Package** : FLEET

**RTL PACLEASE - 7001 - Houston**  
 6300 N. Loop East  
 Houston, TX  
 US 77026

Contact: RODNEY BRIGGS  
 briggsr@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: