



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 210G 1FF210GXTFF523690
 Component
Swing Drive
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0198626	JR0135302	JR0102121
Sample Date		Client Info		22 Dec 2023	28 Jul 2022	10 Dec 2021
Machine Age	hrs	Client Info		5950	5052	4555
Oil Age	hrs	Client Info		431	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		14	30	24
Iron	ppm	ASTM D5185m	>151	12	48	28
Chromium	ppm	ASTM D5185m	>11	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	3
Aluminum	ppm	ASTM D5185m	>21	0	<1	<1
Lead	ppm	ASTM D5185m	>51	0	0	0
Copper	ppm	ASTM D5185m	>51	0	<1	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	2	4	2
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>170	0	<1	<1
Boron	ppm	ASTM D5185m	400	<1	20	25
Barium	ppm	ASTM D5185m	200	0	0	0
Molybdenum	ppm	ASTM D5185m	12	0	0	<1
Manganese	ppm	ASTM D5185m		0	1	<1
Magnesium	ppm	ASTM D5185m	12	<1	<1	<1
Calcium	ppm	ASTM D5185m	150	3	13	5
Phosphorus	ppm	ASTM D5185m	1650	303	355	348
Zinc	ppm	ASTM D5185m	125	3	6	<1
Sulfur	ppm	ASTM D5185m	22500	17848	21702	16639
Visc @ 40°C	cSt	ASTM D445	143	142	141	140

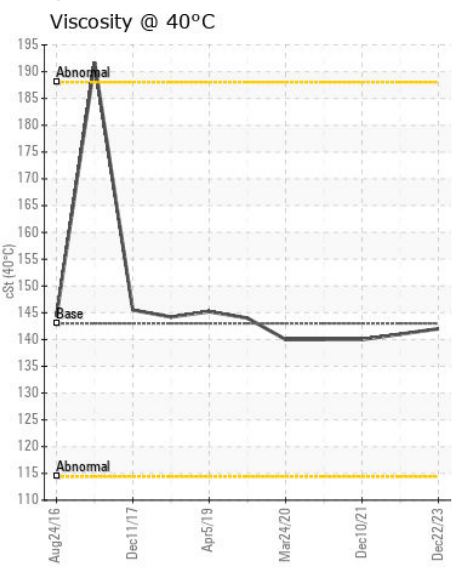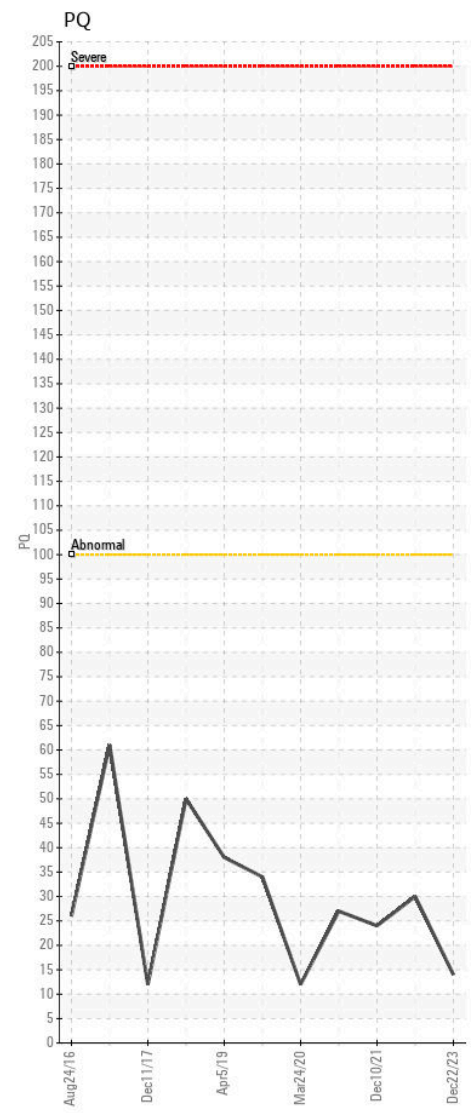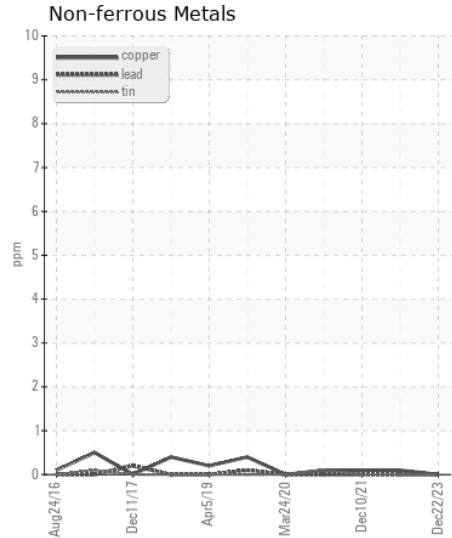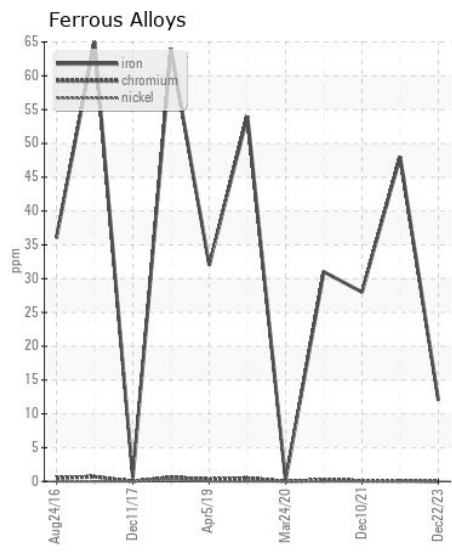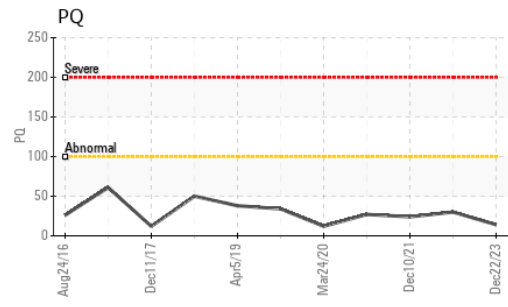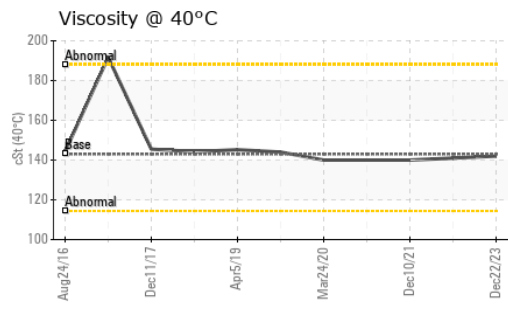

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0198626 **Received** : 10 Jan 2024
Lab Number : 06056927 **Diagnosed** : 11 Jan 2024
Unique Number : 10822876 **Diagnostician** : Don Baldridge
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)