



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**PAULSBORO 165N**  
 Component  
**New (Unused) Oil**  
 Fluid  
**{not provided} (--- LTR)**

## RECOMMENDATION

This is a baseline read-out on the submitted sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0031133</b>	DC0031130	DC0031282
Sample Date		Client Info		<b>22 Dec 2023</b>	22 Dec 2023	12 Dec 2023
Machine Age	mls	Client Info		<b>0</b>	0	0
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR











Iron	ppm	ASTM D5185m		<b>0</b>	0	0
Chromium	ppm	ASTM D5185m		<b>0</b>	0	0
Nickel	ppm	ASTM D5185m		<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m		<b>0</b>	0	0
Lead	ppm	ASTM D5185m		<b>&lt;1</b>	1	0
Copper	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m		<b>1</b>	1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

Silicon	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	1	0
Water		WC Method		<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>5000	<b>263</b>	413	264
Particles >6µm		ASTM D7647	>1300	<b>76</b>	136	66
Particles >14µm		ASTM D7647	>160	<b>10</b>	15	6
Particles >21µm		ASTM D7647	>40	<b>2</b>	3	2
Particles >38µm		ASTM D7647	>10	<b>0</b>	0	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>15/13/10</b>	16/14/11	15/13/10
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

## FLUID CONDITION

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	1	0
Calcium	ppm	ASTM D5185m		<b>0</b>	0	<1
Phosphorus	ppm	ASTM D5185m		<b>3</b>	3	<1
Zinc	ppm	ASTM D5185m		<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m		<b>3929</b>	4092	3551
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.073</b>	0.059	0.056
Visc @ 40°C	cSt	ASTM D445		<b>32.73</b>	32.5	31.39
Visc @ 100°C	cSt	ASTM D445		<b>5.72</b>	5.8	5.71
Viscosity Index (VI)	Scale	ASTM D2270		<b>115</b>	121	123

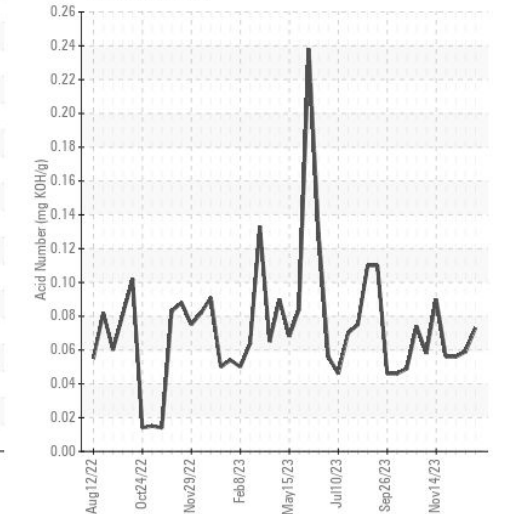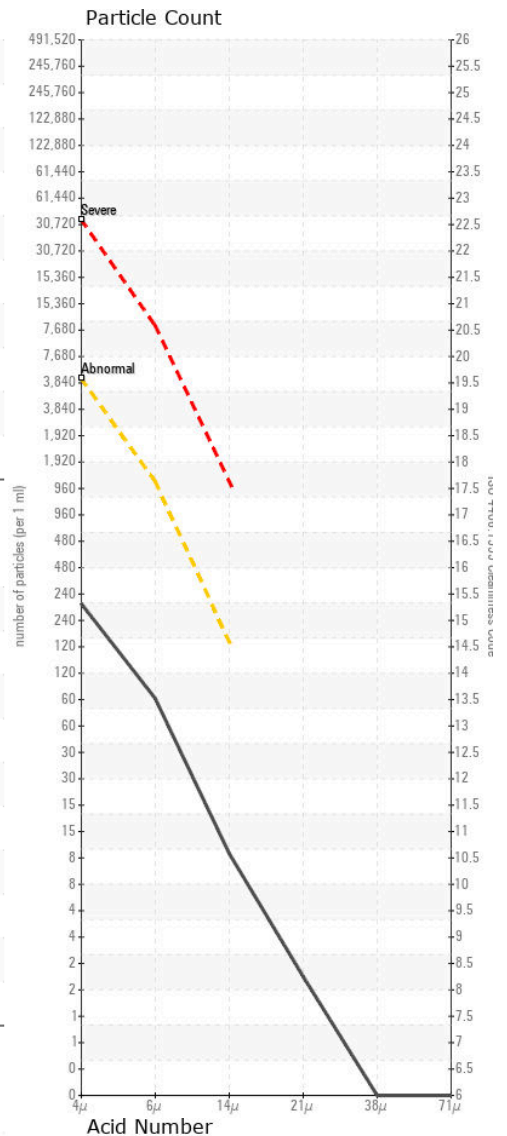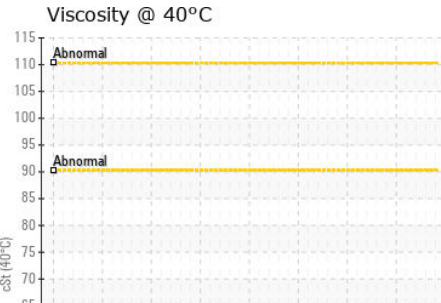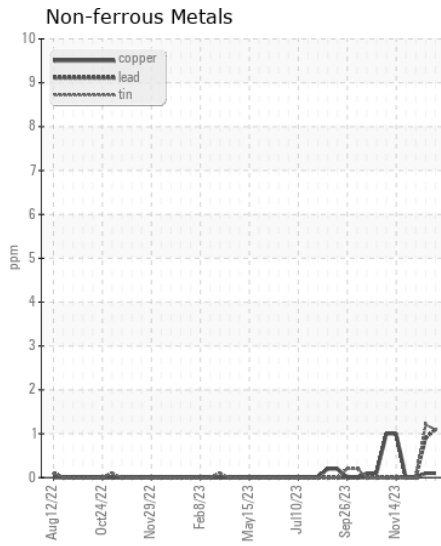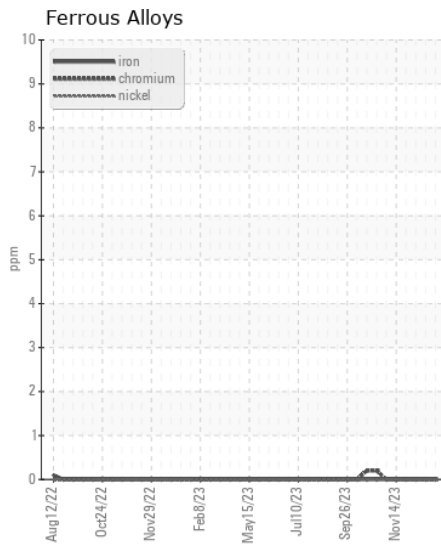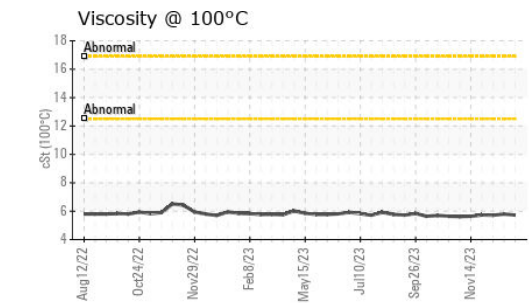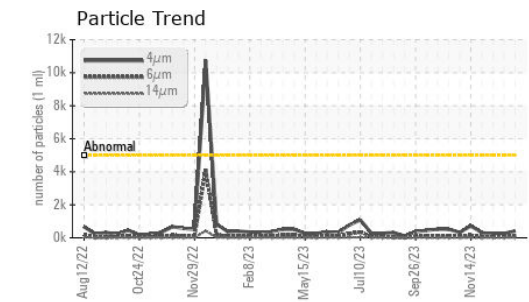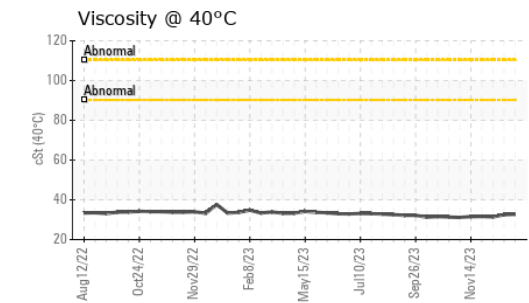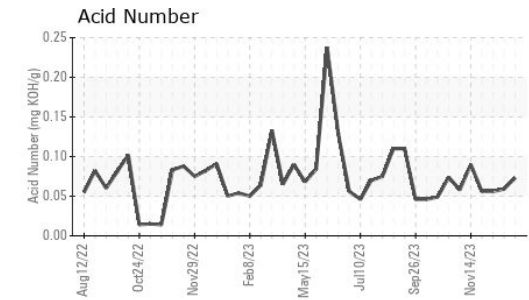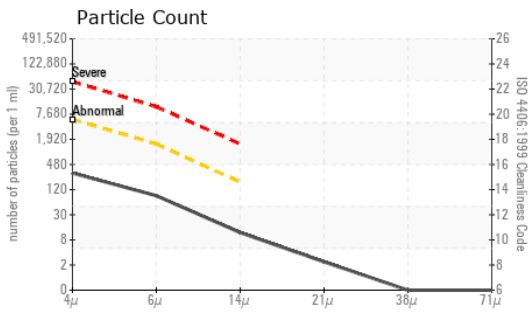

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0031133 **Received** : 10 Jan 2024  
**Lab Number** : 06057106 **Diagnosed** : 12 Jan 2024  
**Unique Number** : 10823055 **Diagnostician** : Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: FT-IR, KV100, PrtCount, VI )

**THE UNITED OIL COMPANY - OPERATIONS**  
 4405 E. BALTIMORE ST  
 BALTIMORE, MD  
 US 21224  
 Contact: MICHELLE HORNING

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (410)327-7695