



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>ATTENTION</b>

Machine Id  
**846-5192**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- QTS)**

## RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0016911</b>	---	---
Sample Date		Client Info		<b>30 Dec 2023</b>	---	---
Machine Age	mls	Client Info		<b>15800</b>	---	---
Oil Age	mls	Client Info		<b>0</b>	---	---
Filter Age	mls	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Chngd</b>	---	---
Filter Changed		Client Info		<b>Not Chngd</b>	---	---
Sample Status				<b>ATTENTION</b>	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>25</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>16</b>	---	---
Lead	ppm	ASTM D5185m	>40	<b>3</b>	---	---
Copper	ppm	ASTM D5185m	>330	<b>22</b>	---	---
Tin	ppm	ASTM D5185m	>15	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION

Fuel content negligible. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>36</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>53</b>	---	---
Fuel	%	ASTM D3524	>5	<b>1.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.1</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.1</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

## FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		<b>4</b>	---	---
Boron	ppm	ASTM D5185m	0	<b>42</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>4</b>	---	---
Molybdenum	ppm	ASTM D5185m	0	<b>9</b>	---	---
Manganese	ppm	ASTM D5185m		<b>3</b>	---	---
Magnesium	ppm	ASTM D5185m	0	<b>707</b>	---	---
Calcium	ppm	ASTM D5185m		<b>1270</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>641</b>	---	---
Zinc	ppm	ASTM D5185m		<b>836</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>2632</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.3</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>6.4</b>	---	---
Visc @ 100°C	cSt	ASTM D445	14	<b>▲ 11.3</b>	---	---


▲ Viscosity @ 100°C

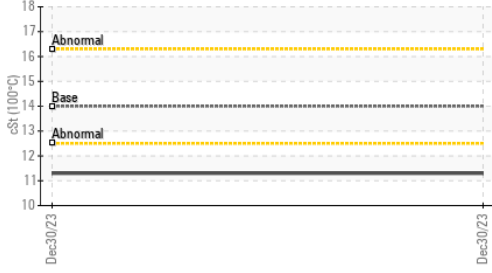


Ferrous Alloys

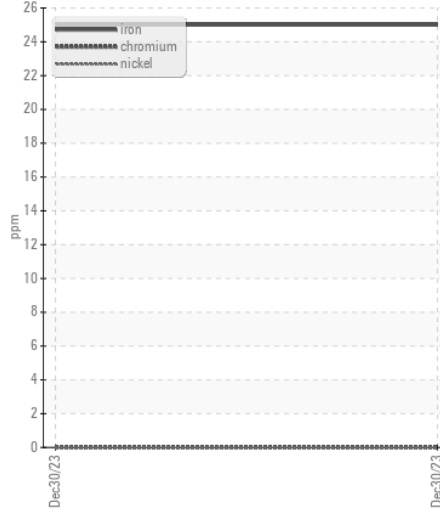


Fuel Dilution

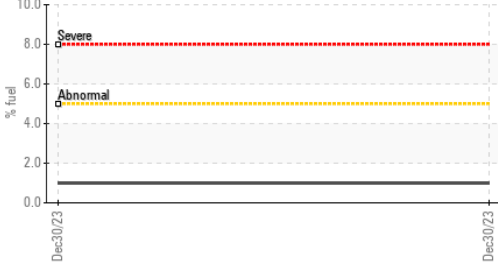


Non-ferrous Metals

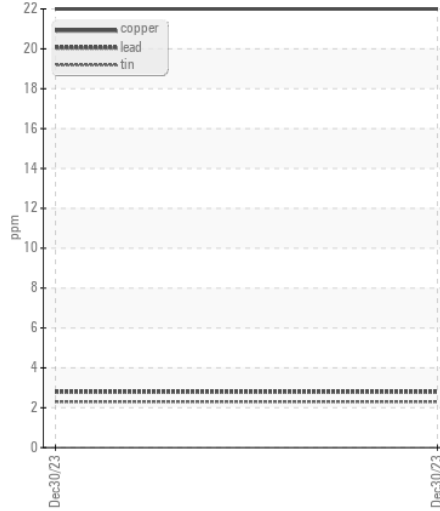


Base Number

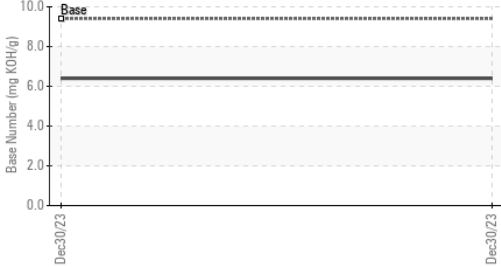

▲ Viscosity @ 100°C

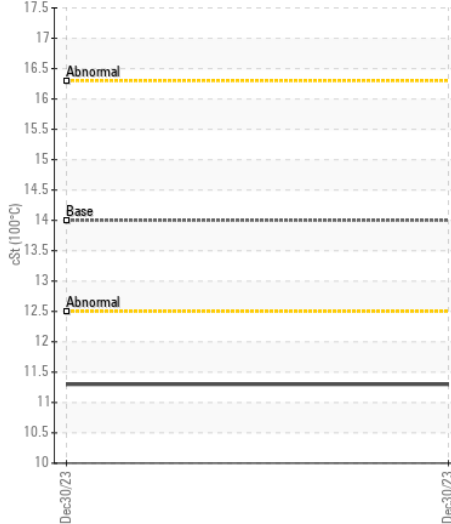

Base Number

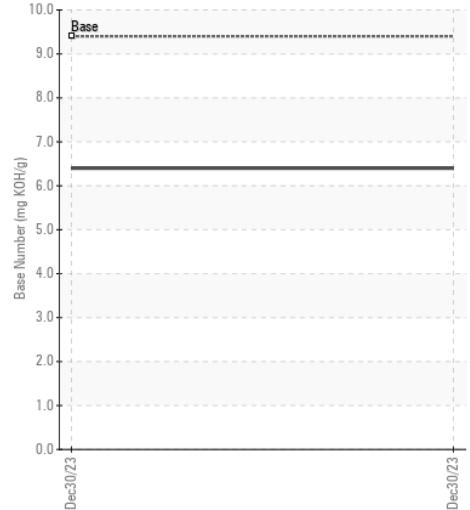

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0016911 **Received** : 11 Jan 2024  
**Lab Number** : 06057813 **Diagnosed** : 15 Jan 2024  
**Unique Number** : 10829195 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**RTL PACLEASE - 7007 - Fontana**  
 3121 South Riverside  
 Bloomington, CA  
 US 92316  
 Contact: Rudy Trevizo  
 TrevizoR@RushEnterprises.Com  
 T: (909)829-1044  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)