



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**10832**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (8 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0104030</b>	GFL0071362	GFL0063086
Sample Date		Client Info		<b>05 Jan 2024</b>	13 Feb 2023	10 Nov 2022
Machine Age	hrs	Client Info		<b>153518</b>	15353	14507
Oil Age	hrs	Client Info		<b>17805</b>	15353	14507
Filter Age	hrs	Client Info		<b>650</b>	650	650
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>9</b>	14	4
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	3
Aluminum	ppm	ASTM D5185m	>15	<b>4</b>	4	1
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>100	<b>&lt;1</b>	1	<1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>3</b>	4	3
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	0
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>6	<b>0.3</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.1</b>	7.2	6.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.6</b>	18.2	19.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	4	2
Boron	ppm	ASTM D5185m	0	<b>17</b>	103	12
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>71</b>	75	58
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>665</b>	509	874
Calcium	ppm	ASTM D5185m	1070	<b>1330</b>	1507	1050
Phosphorus	ppm	ASTM D5185m	1150	<b>972</b>	992	975
Zinc	ppm	ASTM D5185m	1270	<b>1232</b>	1238	1172
Sulfur	ppm	ASTM D5185m	2060	<b>3122</b>	3958	3599
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.9</b>	13.4	14.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.8</b>	8.0	10.1
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	14.1	13.7

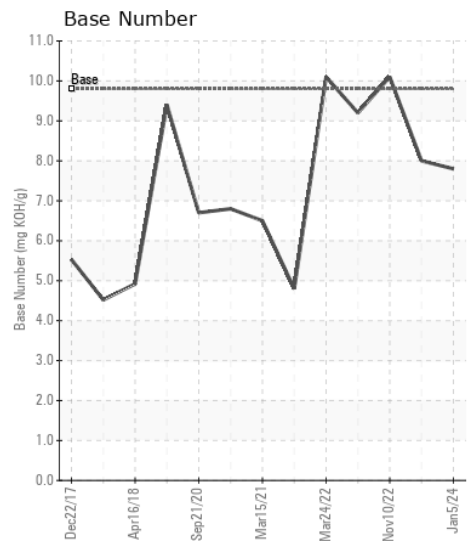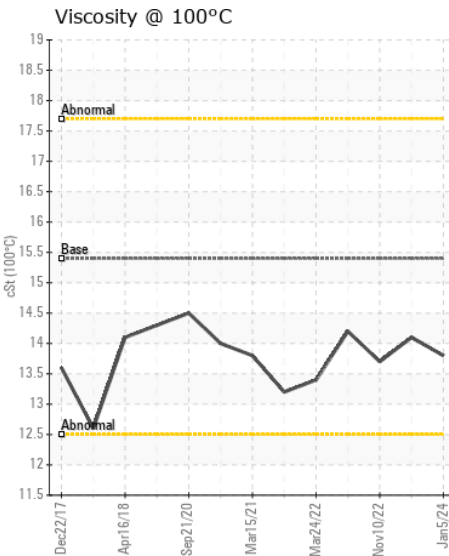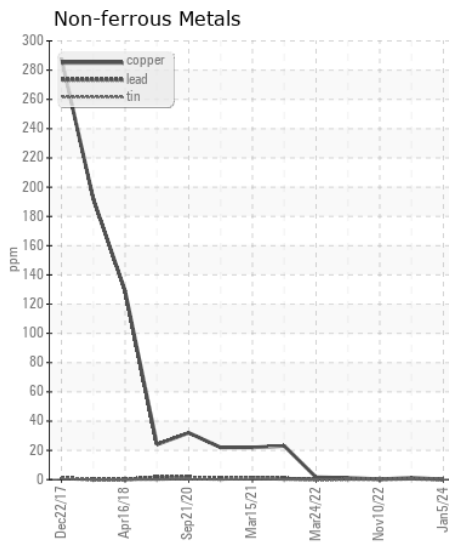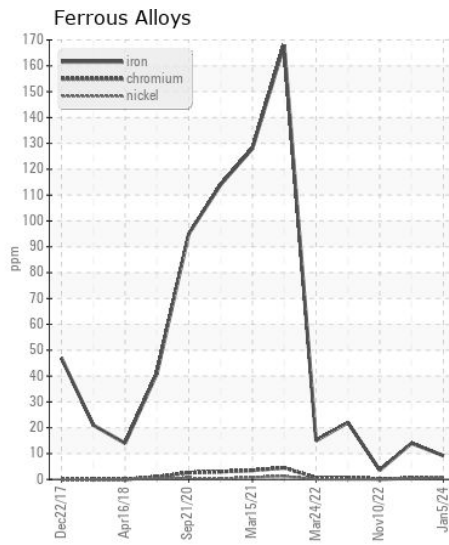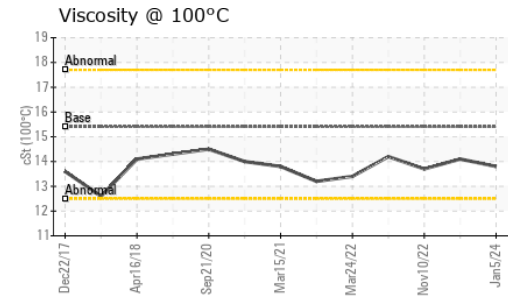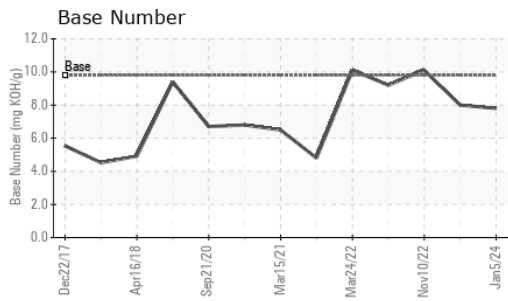

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0104030 **Received** : 11 Jan 2024  
**Lab Number** : 06057884 **Diagnosed** : 12 Jan 2024  
**Unique Number** : 10829266 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 015 - Columbia**  
 7800 Farrow Road  
 Columbia, SC  
 US 29203-3219  
 Contact: NOEL MATTHEWS  
 nmatthewsjr@gflenv.com  
 T: (803)935-0249  
 F: (803)935-0244

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)