



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
FLEET
Machine Id
2227088 (S/N 4v4nc9ehxrn643766)
Component
1 Differential
Fluid
GEAR OIL SAE 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 75W90. Please confirm.
Please specify the component make and model with your next sample.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0112331	---	---
Sample Date		Client Info		12 Dec 2023	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185m	>500	226	---	---
Chromium	ppm	ASTM D5185m	>10	3	---	---
Nickel	ppm	ASTM D5185m	>10	5	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	<1	---	---
Lead	ppm	ASTM D5185m	>25	10	---	---
Copper	ppm	ASTM D5185m	>100	15	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>75	41	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	LIGHT	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---
Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m	400	142	---	---
Barium	ppm	ASTM D5185m	200	6	---	---
Molybdenum	ppm	ASTM D5185m	12	0	---	---
Manganese	ppm	ASTM D5185m		13	---	---
Magnesium	ppm	ASTM D5185m	12	2	---	---
Calcium	ppm	ASTM D5185m	150	18	---	---
Phosphorus	ppm	ASTM D5185m	1650	1146	---	---
Zinc	ppm	ASTM D5185m	125	18	---	---
Sulfur	ppm	ASTM D5185m	22500	25819	---	---
Visc @ 40°C	cSt	ASTM D445	109	97.1	---	---

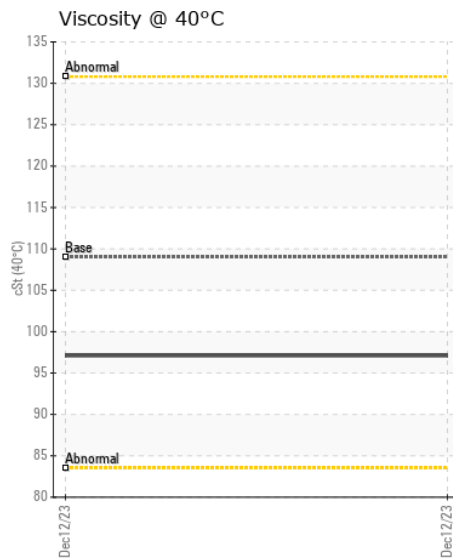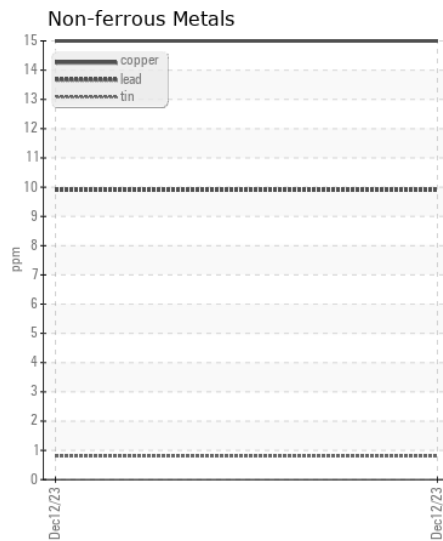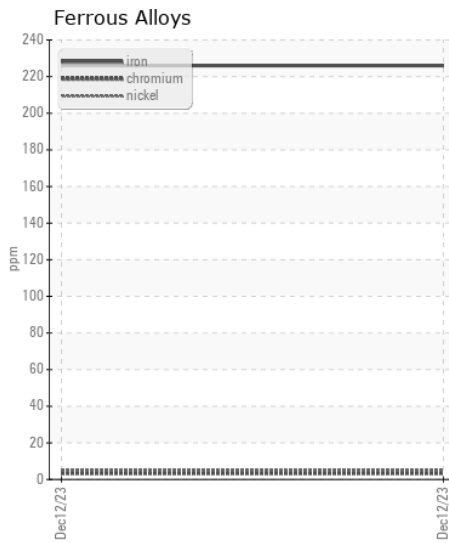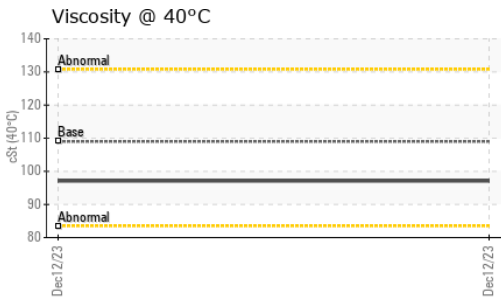

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0112331 **Recieved** : 11 Jan 2024
Lab Number : 06058410 **Diagnosed** : 12 Jan 2024
Unique Number : 10829792 **Diagnostician** : Wes Davis
Test Package : FLEET

PERDUE FARMS - DILLON
 2047 HWY 9 WEST
 DILLON, SC
 US 29536
 Contact: KEVIN HOOKS
 kevin.hooks@perdue.com
 T: (843)841-8069
 F: (843)841-8070

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)