



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
LINDA TAYLOR
Component
Port Main Engine
Fluid
CHEVRON DELO 400 LE 15W40 (165 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | MW0049112 | MW0049121 | MW0044298 |
| Sample Date | | Client Info | | 04 Jan 2024 | 10 Aug 2023 | 18 May 2023 |
| Machine Age | hrs | Client Info | | 32615 | 31021 | 30037 |
| Oil Age | hrs | Client Info | | 1232 | 985 | 1358 |
| Filter Age | hrs | Client Info | | 500 | 309 | 620 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >75 | 5 | 3 | 3 |
| Chromium | ppm | ASTM D5185m | >8 | <1 | 0 | <1 |
| Nickel | ppm | ASTM D5185m | >2 | <1 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | >3 | <1 | 0 | <1 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >15 | 3 | 3 | 2 |
| Lead | ppm | ASTM D5185m | >18 | <1 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >80 | 1 | <1 | 1 |
| Tin | ppm | ASTM D5185m | >14 | <1 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >20 | 6 | 5 | 5 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | <1 | 2 |
| Fuel | | WC Method | >4.0 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | | 0.2 | 0.1 | 0.2 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 6.9 | 6.6 | 7.5 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 23.1 | 22.9 | 23.4 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | >75 | <1 | 1 | 2 |
| Boron | ppm | ASTM D5185m | | 379 | 353 | 343 |
| Barium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 138 | 119 | 120 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | | 721 | 584 | 676 |
| Calcium | ppm | ASTM D5185m | | 1607 | 1405 | 1558 |
| Phosphorus | ppm | ASTM D5185m | 1200 | 806 | 628 | 690 |
| Zinc | ppm | ASTM D5185m | 1300 | 922 | 759 | 852 |
| Sulfur | ppm | ASTM D5185m | 3200 | 3005 | 2290 | 2666 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 16.6 | 16.1 | 16.9 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.6 | 8.0 | 8.9 | 8.4 |
| Visc @ 100°C | cSt | ASTM D445 | 15.7 | 13.2 | 13.3 | 13.3 |

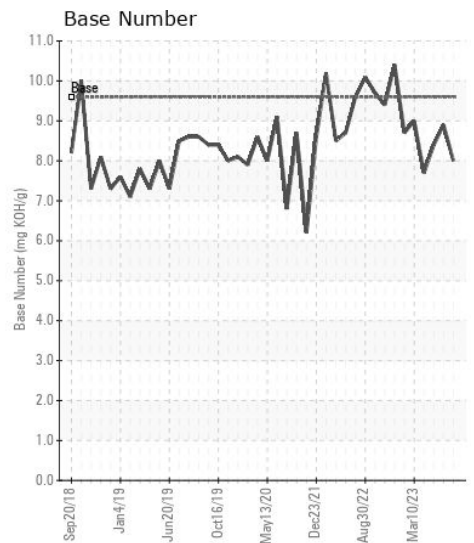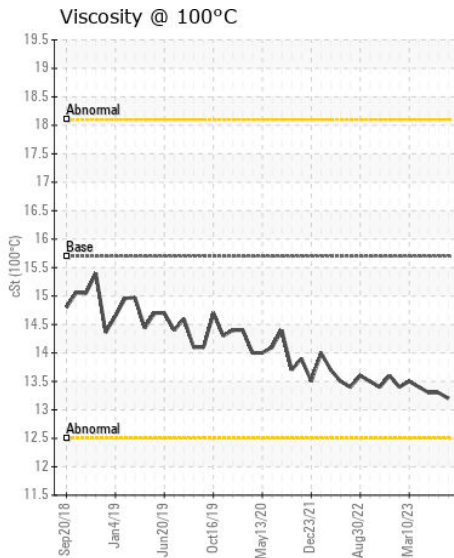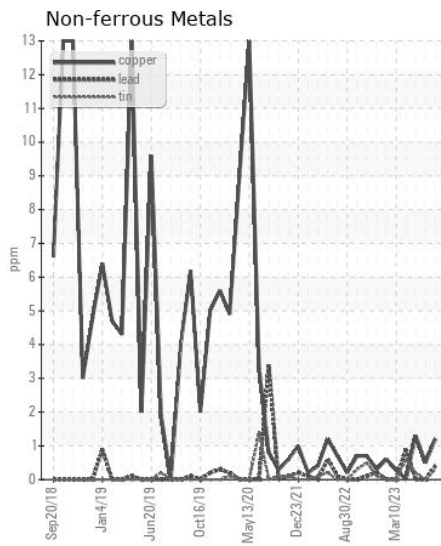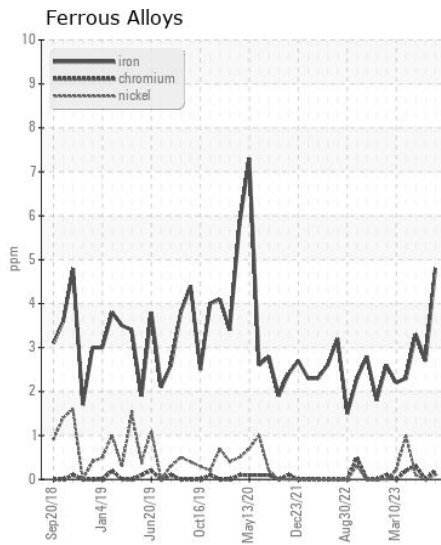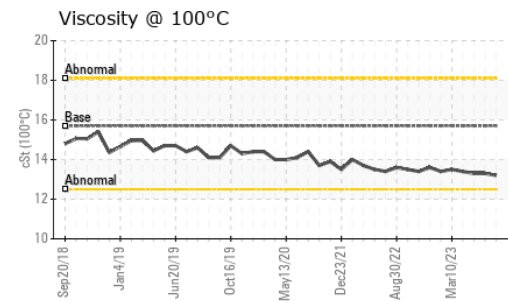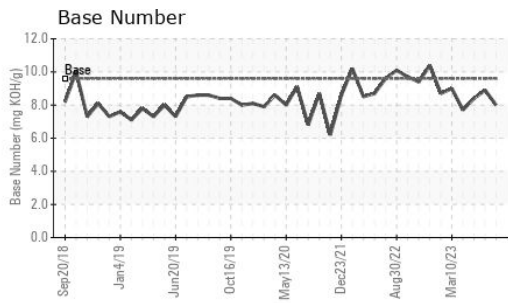

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0049112 **Received** : 11 Jan 2024
Lab Number : 06058662 **Diagnosed** : 12 Jan 2024
Unique Number : 10830044 **Diagnostician** : Wes Davis
Test Package : MAR 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

MAGNOLIA MARINE TRANSPORT
 697 HAINING ROAD
 VICKSBURG, MS
 US 39183

Contact: MMT MAINTENANCE PLANNERS
 mmtmaintenanceplanners@ergon.com

T: x:
 F: (601)638-8028