



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[4870 IAA]
Machine Id
VOLVO L90H 623880
Component
Diesel Engine
Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP438982	VCP421058	VCP382994
Sample Date		Client Info		04 Jan 2024	11 May 2023	01 Nov 2022
Machine Age	hrs	Client Info		8022	7479	7005
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m		2	7	7
Chromium	ppm	ASTM D5185m		<1	<1	<1
Nickel	ppm	ASTM D5185m		<1	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		7	7	8
Lead	ppm	ASTM D5185m		<1	0	<1
Copper	ppm	ASTM D5185m		<1	<1	<1
Tin	ppm	ASTM D5185m		<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		5	6	5
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Fuel		WC Method		<1.0	<1.0	<1.0
Water		WC Method		NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.4	0.3	0.3
Nitration	Abs/cm	*ASTM D7624		7.5	7.4	8.1
Sulfation	Abs/.1mm	*ASTM D7415		21.5	22.1	23.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual		NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	3	2
Boron	ppm	ASTM D5185m		22	41	38
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		40	43	44
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		527	539	514
Calcium	ppm	ASTM D5185m		1631	1768	1717
Phosphorus	ppm	ASTM D5185m		965	938	902
Zinc	ppm	ASTM D5185m		1158	1149	1066
Sulfur	ppm	ASTM D5185m		3005	3314	3330
Oxidation	Abs/.1mm	*ASTM D7414		20.2	20.5	21.4
Base Number (BN)	mg KOH/g	ASTM D2896		10.2	10.8	11.8
Visc @ 100°C	cSt	ASTM D445		13.0	13.4	13.2

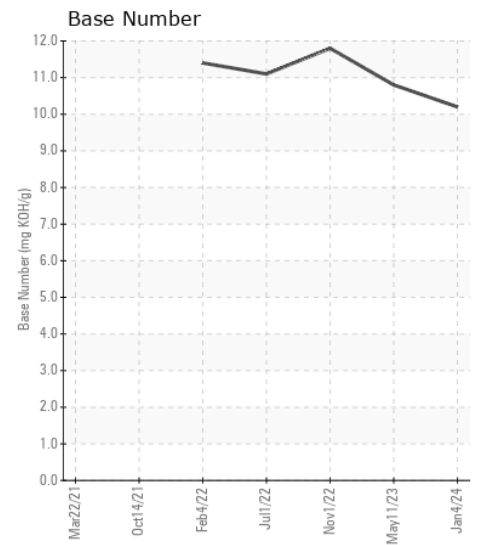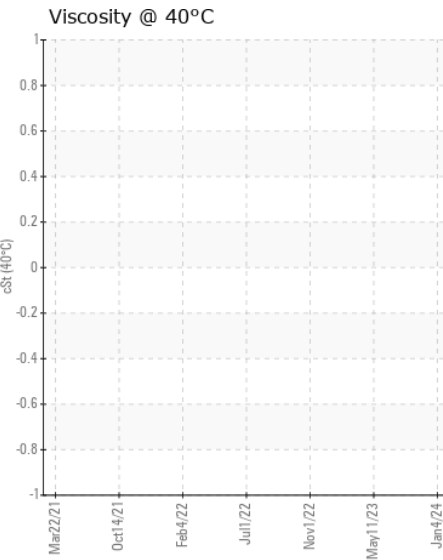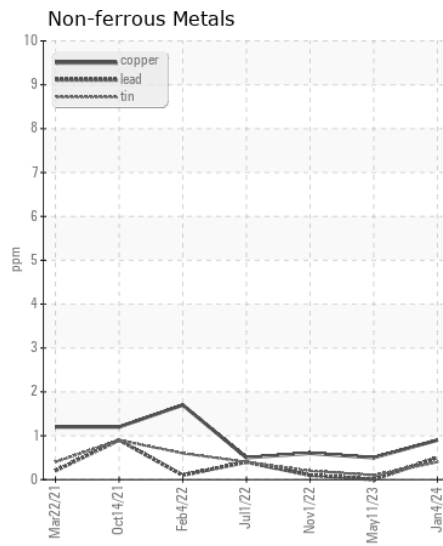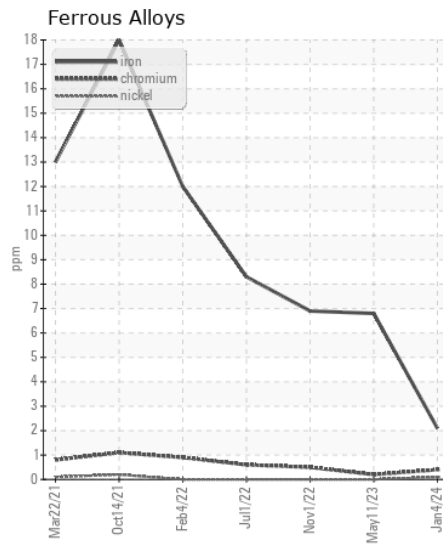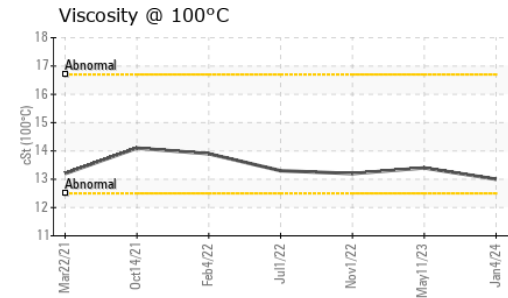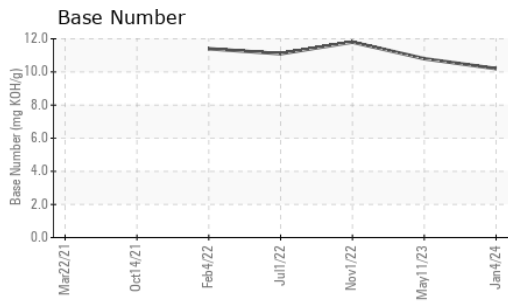

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP438982 **Received** : 12 Jan 2024
Lab Number : 06059054 **Diagnosed** : 12 Jan 2024
Unique Number : 10830436 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

ALTA EQUIPMENT/FLAGLER EQUIPMENT LLC
 9601 BOGGY CREEK RD
 ORLANDO, FL
 US 32824
 Contact: Robert LaPlante
 robert.laplante@altg.com
 T: (407)508-9736
 F: (407)659-8720

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)