



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
MICHEAL KELLER [A34389]
 Machine Id
200 GLC (S/N 1FF200GAHPF000049)
 Component
Right Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: A34389)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0006001	---	---
Sample Date		Client Info		10 Jan 2024	---	---
Machine Age	hrs	Client Info		565	---	---
Oil Age	hrs	Client Info		565	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		106	---	---
Iron	ppm	ASTM D5185m	>500	104	---	---
Chromium	ppm	ASTM D5185m	>10	2	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	<1	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>50	2	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	MODER	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	16	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m		60	---	---
Barium	ppm	ASTM D5185m		6	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		2	---	---
Calcium	ppm	ASTM D5185m		40	---	---
Phosphorus	ppm	ASTM D5185m		491	---	---
Zinc	ppm	ASTM D5185m		32	---	---
Sulfur	ppm	ASTM D5185m		13999	---	---
Visc @ 40°C	cSt	ASTM D445		188	---	---

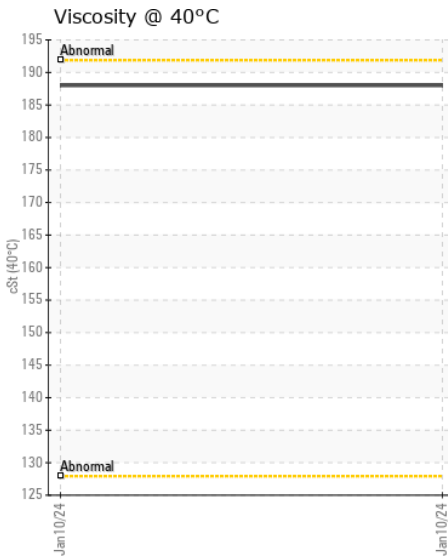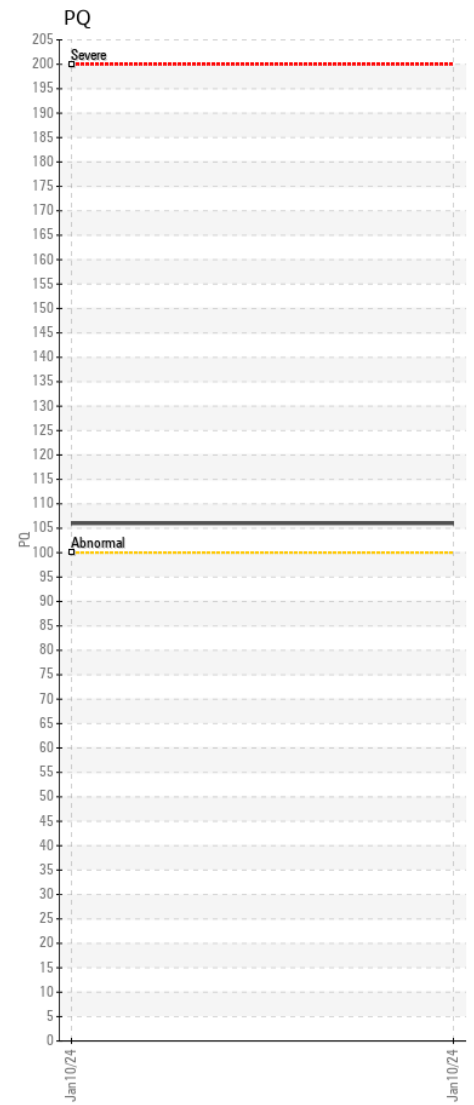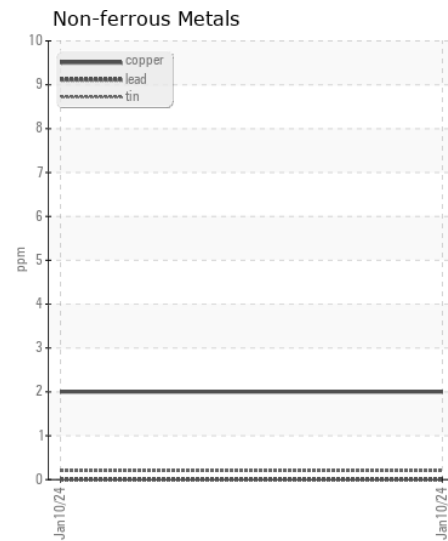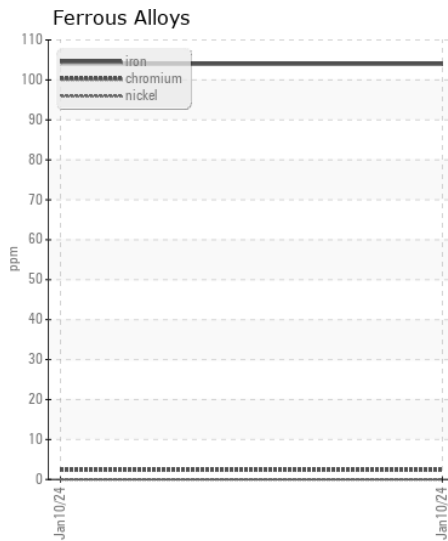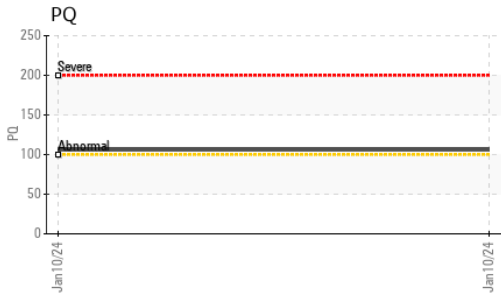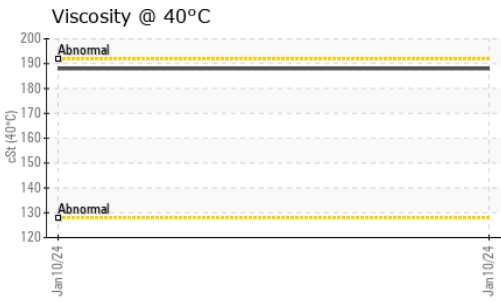

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0006001 **Received** : 12 Jan 2024
Lab Number : 06059545 **Diagnosed** : 16 Jan 2024
Unique Number : 10830927 **Diagnostician** : Jonathan Hester
Test Package : CONST (Additional Tests: PQ)

WARRIOR TRACTOR AND EQUIPMENT - HUNTSVILLE
 25135 ONE AVIATION WAY SW
 MADISON, AL
 US 35756
 Contact: BOBBY LUCKY
 warriorparts033@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: