



# ASCENDUM

## OIL ANALYSIS REPORT



Area  
**Ascendum Machinery/500 Hour CSA**  
 Machine Id  
**VOLVO L70H 2169 (S/N 624365)**  
 Component  
**Rear Axle**  
 Fluid  
**{not provided} (--- GAL)**

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ASC0001639</b>	---	---
Sample Date		Client Info		<b>10 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>512</b>	---	---
Oil Age	hrs	Client Info		<b>512</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changed</b>	---	---
Filter Changed		Client Info		<b>Not Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>51</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>120	<b>1</b>	---	---
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>13</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>7</b>	---	---
Boron	ppm	ASTM D5185m		<b>156</b>	---	---
Barium	ppm	ASTM D5185m		<b>3</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>11</b>	---	---
Manganese	ppm	ASTM D5185m		<b>8</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>12</b>	---	---
Calcium	ppm	ASTM D5185m		<b>4254</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>1342</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1726</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>4540</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>39.6</b>	---	---

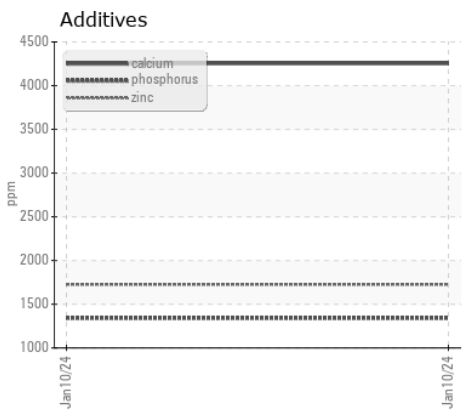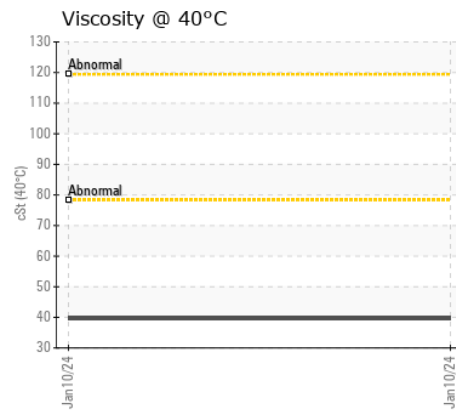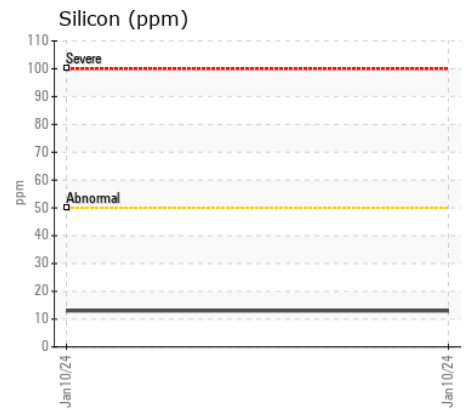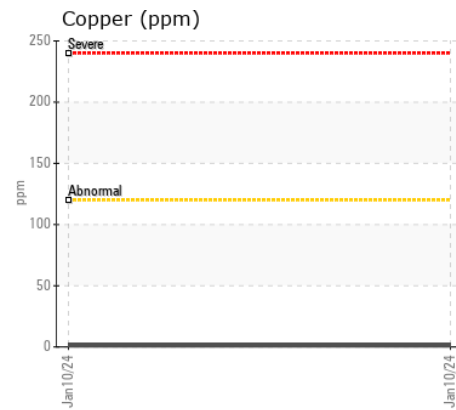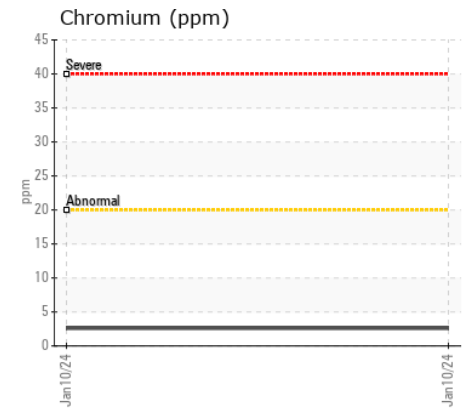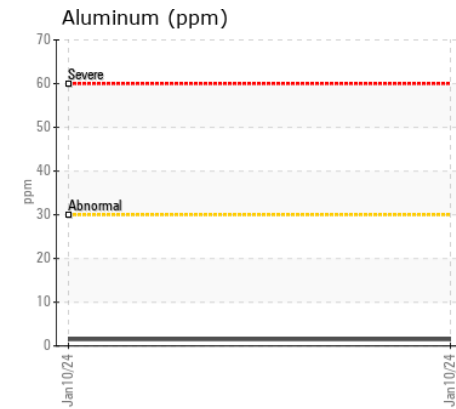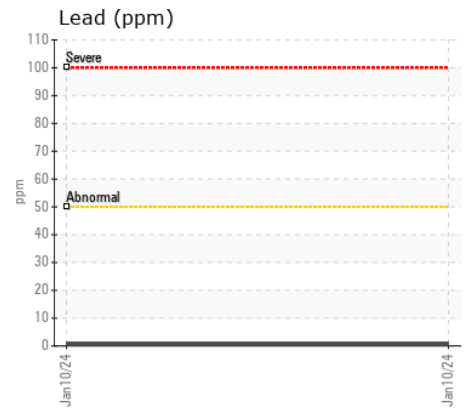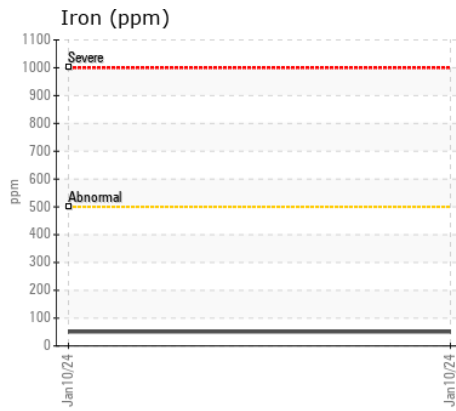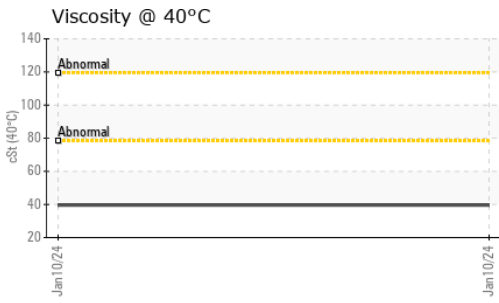

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0001639 **Received** : 12 Jan 2024  
**Lab Number** : 06059642 **Diagnosed** : 16 Jan 2024  
**Unique Number** : 10831024 **Diagnostician** : Jonathan Hester  
**Test Package** : MOBCE

**TRIANGLE GRADING AND PAVING INC**  
 1521 Huffman Mill Rd  
 BURLINGTON, NC  
 US 27216  
 Contact: KAREN HILLIARD  
 khilliard@trianglegradingpaving.com  
 T: (336)584-1745  
 F: (336)584-0145

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)