



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**BEECH PT6A-21 5115H (S/N PCE-PE0548)**  
 Component  
**Right Jet Turbine**  
 Fluid  
**EASTMAN TURBO OIL 2380 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GF0001474</b>	---	---
Sample Date		Client Info		<b>10 Jan 2024</b>	---	---
TSN	hrs	Client Info		<b>2623</b>	---	---
TSO	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>2623</b>	---	---
Filter Age	hrs	Client Info		<b>750</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>8	<b>0</b>	---	---
Chromium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>2	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>3	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>3	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>8	<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

## FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	---	---
Boron	ppm	ASTM D5185m	0	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m	0	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185m	0	<b>0</b>	---	---
Phosphorus	ppm	ASTM D5185m	2500	<b>2643</b>	---	---
Zinc	ppm	ASTM D5185m	0	<b>0</b>	---	---
Sulfur	ppm	ASTM D5185m	0	<b>0</b>	---	---
Visc @ 40°C	cSt	ASTM D445	24.2	<b>24.0</b>	---	---

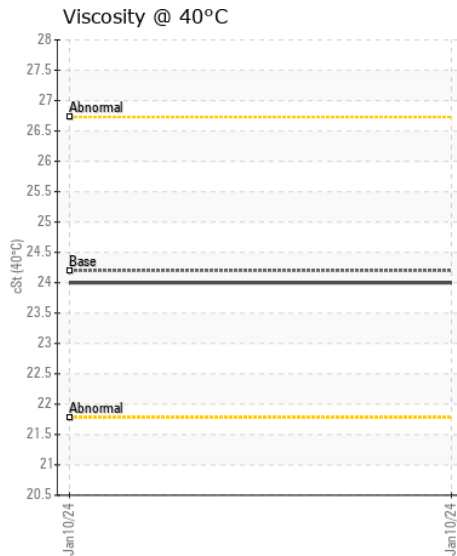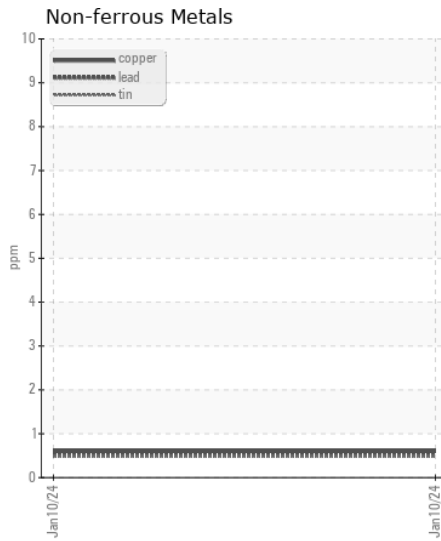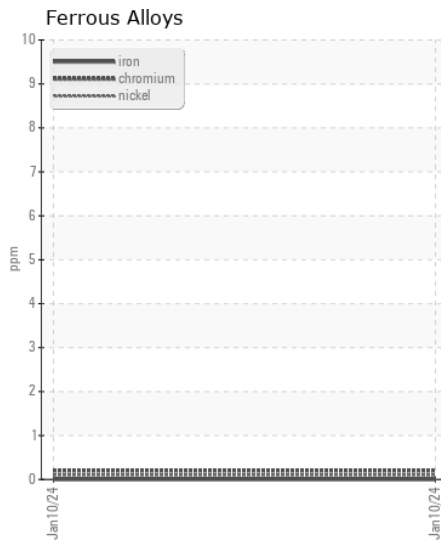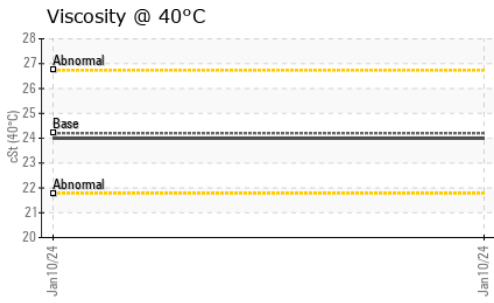

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GF0001474  
**Lab Number** : **06059721**  
**Unique Number** : 10831103  
**Test Package** : AVI 1

**STEVENS AEROSPACE AND DEFENSE SYSTEMS, LLC**  
 1280 THUNDERBIRD DR  
 SMYRNA, TN  
 US 37167  
 Contact: PATRICK ISRAEL  
 pisrael@stevensaerospace.com  
 T: (615)365-2132  
 F: (615)365-0966

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)