



# OIL ANALYSIS REPORT

|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |



Machine Id  
**CATERPILLAR AP1055E 001671 (S/N AP105KTJF00341)**  
Component  
**Diesel Engine**  
Fluid  
**CASTROL VECTON 15W40 CK4 (5 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>WC0800459</b>   | WC0823894   | WC0757912   |
| Sample Date    |     | Client Info |           | <b>02 Jan 2024</b> | 11 Sep 2023 | 28 Feb 2023 |
| Machine Age    | hrs | Client Info |           | <b>10131</b>       | 9786        | 9036        |
| Oil Age        | hrs | Client Info |           | <b>345</b>         | 750         | 386         |
| Filter Age     | hrs | Client Info |           | <b>345</b>         | 750         | 386         |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | Changed     | Changed     |
| Filter Changed |     | Client Info |           | <b>Changed</b>     | Changed     | Changed     |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## WEAR

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >100 | <b>42</b>    | 25   | 10   |
| Chromium     | ppm    | ASTM D5185m | >20  | <b>&lt;1</b> | <1   | <1   |
| Nickel       | ppm    | ASTM D5185m | >2   | <b>&lt;1</b> | 0    | 0    |
| Titanium     | ppm    | ASTM D5185m | >2   | <b>&lt;1</b> | 0    | 0    |
| Silver       | ppm    | ASTM D5185m | >2   | <b>0</b>     | 0    | <1   |
| Aluminum     | ppm    | ASTM D5185m | >25  | <b>3</b>     | 6    | 3    |
| Lead         | ppm    | ASTM D5185m | >40  | <b>&lt;1</b> | <1   | <1   |
| Copper       | ppm    | ASTM D5185m | >330 | <b>2</b>     | 4    | 3    |
| Tin          | ppm    | ASTM D5185m | >15  | <b>&lt;1</b> | <1   | <1   |
| Vanadium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | 0    | <1   |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

## CONTAMINATION







There is no indication of any contamination in the oil.

|                  |          |             |       |                |       |       |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >25   | <b>7</b>       | 6     | 6     |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>&lt;1</b>   | 2     | 1     |
| Fuel             |          | WC Method   | >5    | <b>&lt;1.0</b> | <1.0  | <1.0  |
| Water            |          | WC Method   | >0.2  | <b>NEG</b>     | NEG   | NEG   |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 | >3    | <b>0.4</b>     | 0.5   | 0.4   |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>11.1</b>    | 12.2  | 11.1  |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>21.6</b>    | 25.8  | 21.1  |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.2  | <b>NEG</b>     | NEG   | NEG   |

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |      |              |      |      |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium           | ppm      | ASTM D5185m |      | <b>7</b>     | 3    | 2    |
| Boron            | ppm      | ASTM D5185m |      | <b>23</b>    | 15   | 27   |
| Barium           | ppm      | ASTM D5185m |      | <b>0</b>     | 0    | 0    |
| Molybdenum       | ppm      | ASTM D5185m |      | <b>89</b>    | 93   | 86   |
| Manganese        | ppm      | ASTM D5185m |      | <b>&lt;1</b> | <1   | 1    |
| Magnesium        | ppm      | ASTM D5185m |      | <b>98</b>    | 89   | 94   |
| Calcium          | ppm      | ASTM D5185m |      | <b>2024</b>  | 2165 | 2092 |
| Phosphorus       | ppm      | ASTM D5185m |      | <b>1020</b>  | 970  | 973  |
| Zinc             | ppm      | ASTM D5185m |      | <b>1193</b>  | 1234 | 1223 |
| Sulfur           | ppm      | ASTM D5185m |      | <b>3512</b>  | 3583 | 3952 |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>17.5</b>  | 22.9 | 16.9 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 10   | <b>5.3</b>   | 4.5  | 6.4  |
| Visc @ 100°C     | cSt      | ASTM D445   | 15.5 | <b>13.5</b>  | 13.9 | 13.6 |

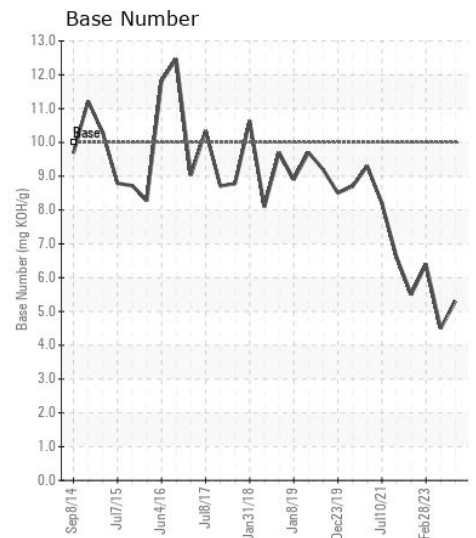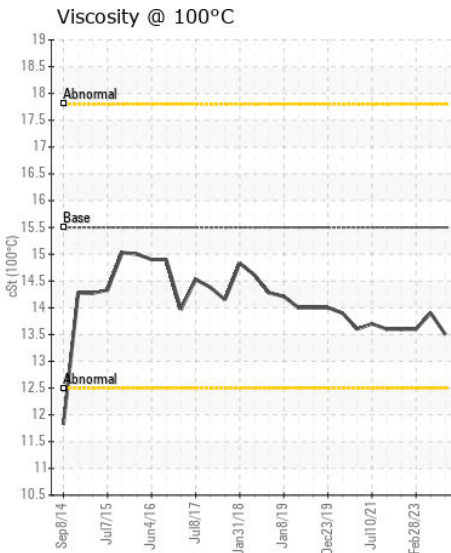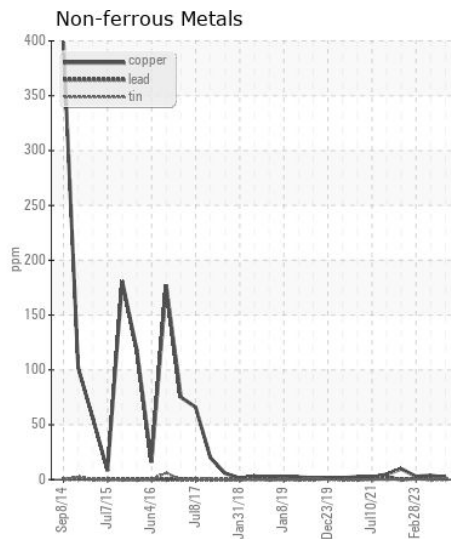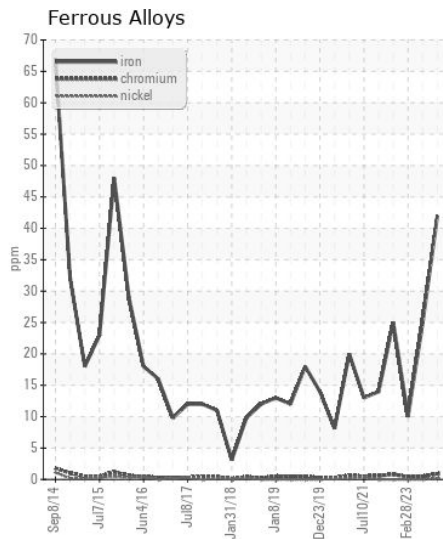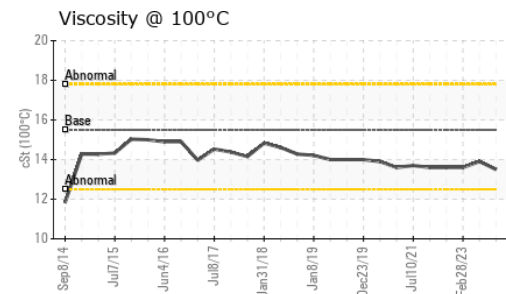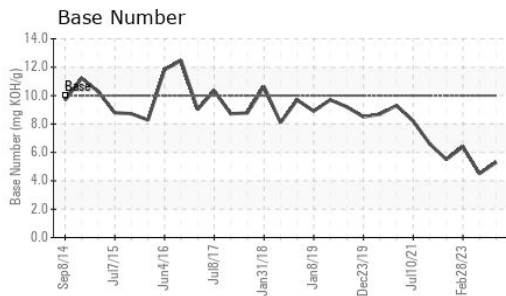

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0800459 **Received** : 12 Jan 2024  
**Lab Number** : 06060069 **Diagnosed** : 16 Jan 2024  
**Unique Number** : 10831451 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CJ MILLER LLC**  
 2903 DEDE RD  
 FINKSBURG, MD  
 US 21048

Contact: JOE ROSS  
 jross@cjmillerllc.com  
 T: (410)239-8006  
 F: (410)239-1051